





ACURO (LED)

MIRROR LUMINAIRES
WITH RECTANGULAR
CROSS-SECTIONS

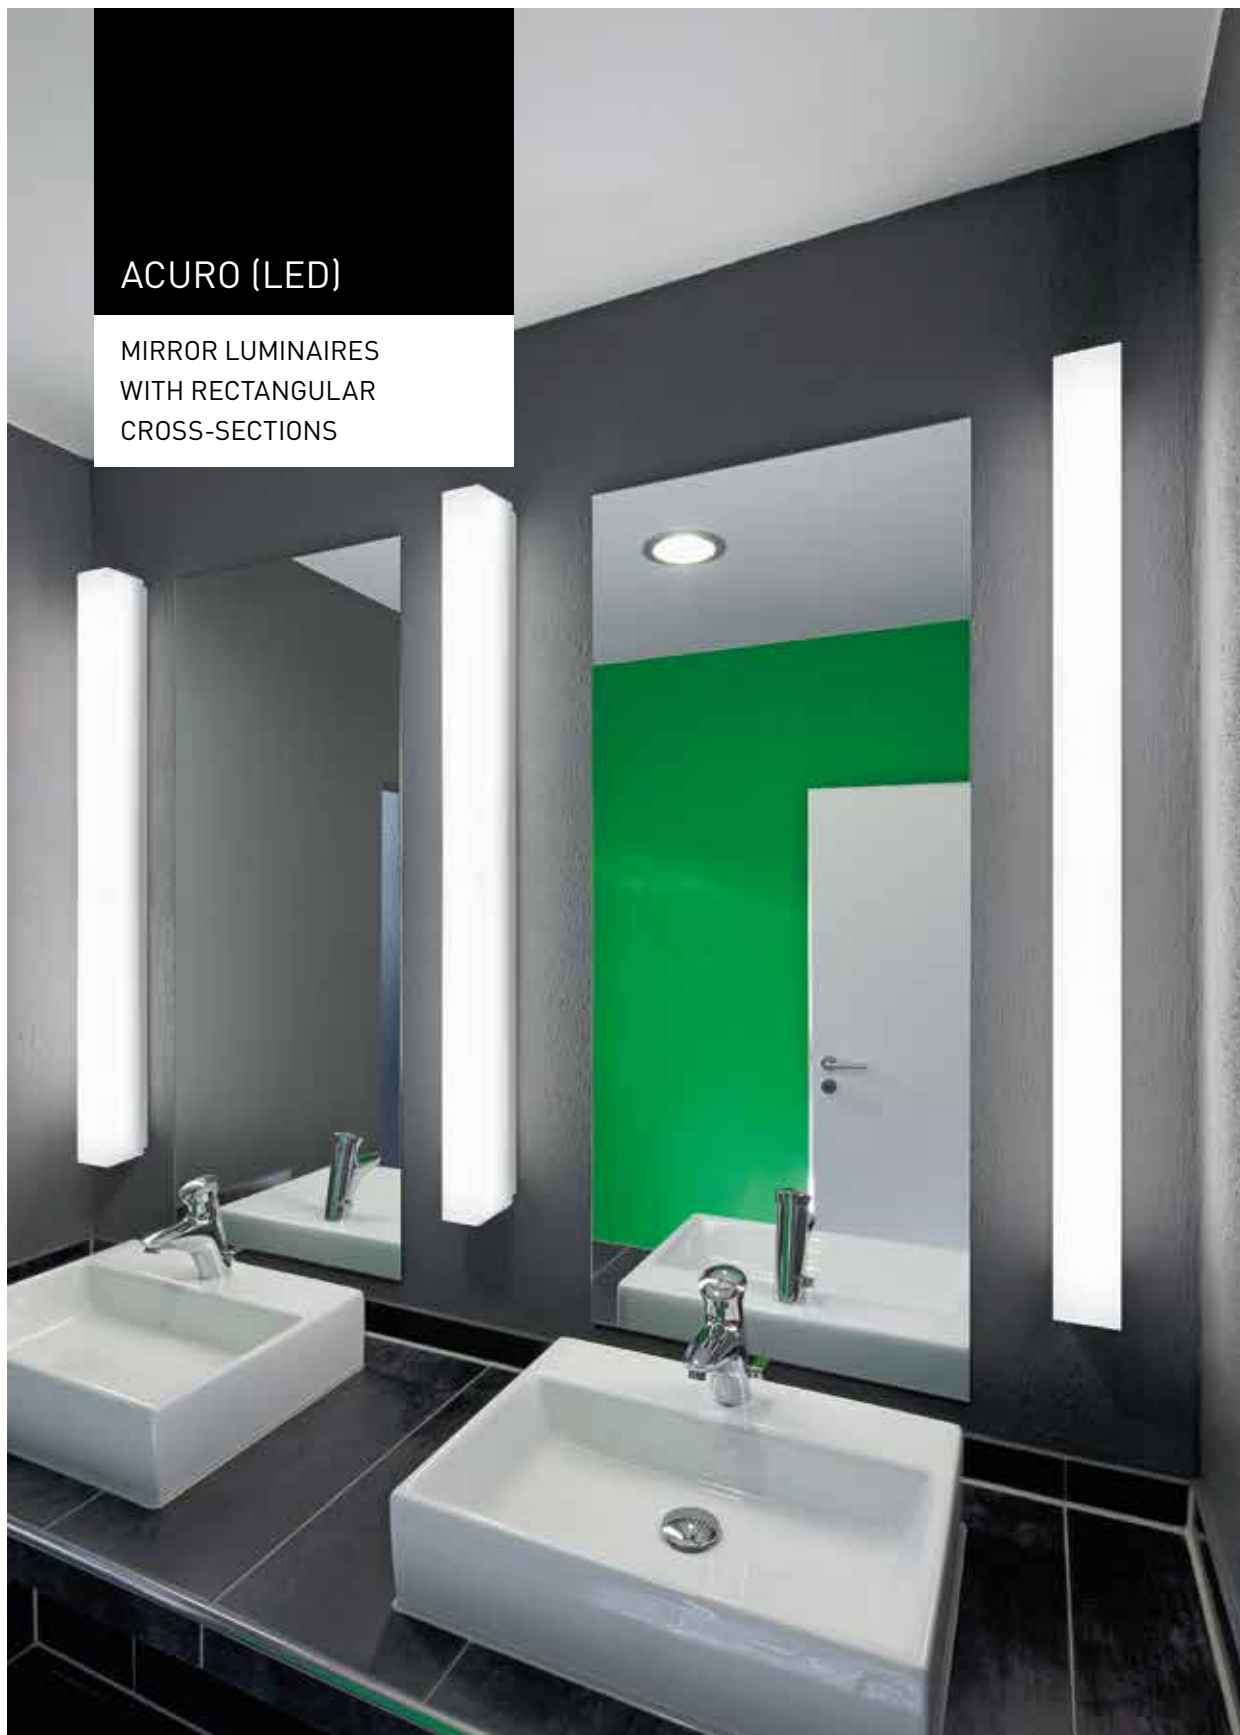

SET IN THE RIGHT LIGHT

- A calm appearance via all-round diffuser with recessed end caps.
- Soft light in complete harmony via fine-structure opal diffuser.
- Simple positioning / alignment of the luminaire to the mirror.
- Unlimited use in installation zone 2 in sanitary facilities.





Elegant and filigree



Individual solutions





Wall-mounted mirror luminaires with higher protection rating, with opal cover for supporting the natural day/night rhythm

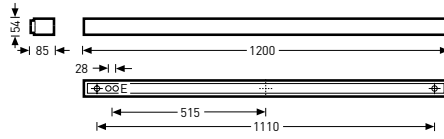

Reference	TOC	...ETDD		EEC	W	≈kg
• Acuro Active LED 2000...+TLM 01	60 656...	...51	2900 lm	A++/A+/A	40	3.3
Acuro Active LED 2000...01	60 655...	...51	2900 lm	A++/A+/A	40	3.2

• IK02/0.2 J 650 °C

Surface-mounted luminaires and wall-mounted mirror luminaires, with higher protection, with opal cover


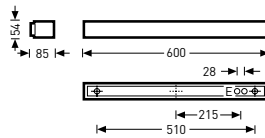


Reference ¹⁾	TOC	...ET		EEC	W	≈kg
• Acuro LED 1000 nw...01	60 648...	...40	1200 lm	A++/A+/A	14	1.4
Acuro LED 1000 ww...01	60 641...	...40	1100 lm	A++/A+/A	14	1.4

¹⁾HFS version on request

• IK02/0.2 J 650 °C

Surface-mounted luminaires and wall-mounted mirror luminaires, with higher protection, with opal cover


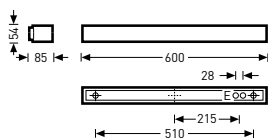


Reference ¹⁾	TOC	...E		EEC	=kg
• Acuro 114...01	60 371...	...04	1 x 14	A+/A/B	1.3
Acuro 114...01 PC	60 372...	...04	1 x 14	A+/A/B	1.3

¹⁾HFS version on request

• IK02/0.2 J 650 °C

Surface-mounted luminaires and wall-mounted mirror luminaires, with higher protection, with opal cover


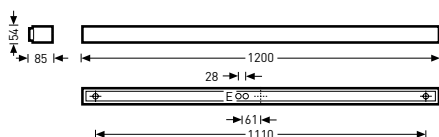


Reference ¹⁾	TOC	...EDD	...E		EEC	=kg
• Acuro 128...01	60 373...	...07	...04	1 x 28	A+/A/B	2.7

¹⁾HFS version on request

• IK02/0.2 J 650 °C

Surface-mounted luminaires and wall-mounted mirror luminaires, with higher protection, with opal cover


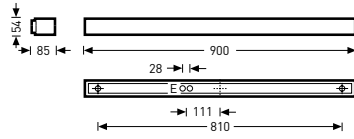


Reference ¹⁾	TOC	...EDD	...E		EEC	≈kg
• Acuro 139...01	60 374...	...07	...04	1 x 39	A+	1.9

¹⁾ HFS version on request

• IK02/0.2 J 650 °C



Wall-mounted mirror luminaires with higher protection rating with opal cover and integrated push button switch

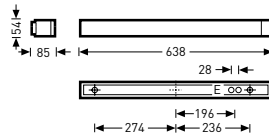

Reference	TOC	...ET		EEC	W	≈kg
• Acuro S LED 1000 nw...01	60 650...	...40	1200 lm	A++/A+/A	14	1.5
Acuro S LED 1000 ww...01	60 643...	...40	1100 lm	A++/A+/A	14	1.5

• IK02/0.2 J 650 °C



Wall-mounted mirror luminaires with higher protection rating with opal cover and integrated push button switch

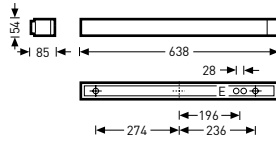

Reference	TOC	...E		EEC	=kg
• Acuro S 114...01	60 379...	...04	1 x 14	A+/A/B	1.3
Acuro S 114...01 PC	60 380...	...04	1 x 14	A+/A/B	1.3

• IK02/0.2 J 650 °C



Wall-mounted mirror luminaires with higher protection rating with opal cover and integrated push button switch, chrome-plated end cap

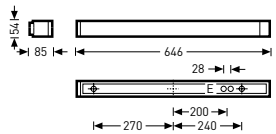

Reference	TOC	...ET		EEC	W	=kg
• Acuro S LED 1000 nw...04	60 653...	...40	1200 lm	A++/A+/A	14	1.5
Acuro S LED 1000 ww...04	60 646...	...40	1100 lm	A++/A+/A	14	1.5

• IK02/0.2 J 650 °C



Wall-mounted mirror luminaires with higher protection rating with opal cover and integrated push button switch, chrome-plated end cap

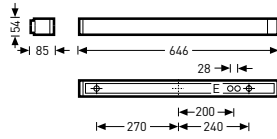

Reference	TOC	...E		EEC	≈kg
• Acuro S 114...04	60 385...	...04	1 x 14	A+/A/B	1.3
Acuro S 114...04 PC	60 386...	...04	1 x 14	A+/A/B	1.3

• IK02/0.2 J 650 °C



Wall-mounted mirror luminaires with opal cover, with integral safety socket and push button switch

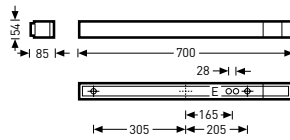

Reference	TOC	...ET		EEC	W	≈kg
• Acuro St LED1000 nw...01	60 649...	...40	1200 lm	A++/A+/A	14	1.7
Acuro St LED 1000 ww...01	60 642...	...40	1100 lm	A++/A+/A	14	1.7
Acuro St-S LED 1000 nw...01	60 651...	...40	1200 lm	A++/A+/A	14	1.7
Acuro St-S LED 1000 ww...01	60 644...	...40	1100 lm	A++/A+/A	14	1.7

• IK02/0.2 J 650 °C



Wall-mounted mirror luminaires with opal cover, with integral safety socket and push button switch

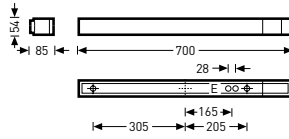

Reference	TOC	...E		EEC	=kg
• Acuro St 114...01	60 375...	...04	1 x 14	A+/A/B	1.5
Acuro St 114...01 PC	60 377...	...04	1 x 14	A+/A/B	1.5
Acuro St-S 114...01	60 376...	...04	1 x 14	A+/A/B	1.5
Acuro St-S 114...01 PC	60 378...	...04	1 x 14	A+/A/B	1.5

• IK02/0.2 J 650 °C



Wall-mounted mirror luminaires with opal cover, with integral safety socket and push button switch, chrome-plated end cap

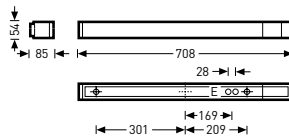

Reference	TOC	...ET		EEC	W	=kg
• Acuro St LED 1000 nw...04	60 652...	...40	1200 lm	A++/A+/A	14	1.7
Acuro St LED 1000 ww...04	60 645...	...40	1100 lm	A++/A+/A	14	1.7
Acuro St-S LED 1000 nw...04	60 654...	...40	1200 lm	A++/A+/A	14	1.7
Acuro St-S LED 1000 ww...04	60 647...	...40	1100 lm	A++/A+/A	14	1.7

• IK02/0.2 J 650 °C

Wall-mounted mirror luminaires with opal cover,
with integral safety socket and push button switch, chrome-plated end cap

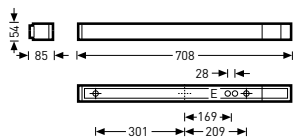

Reference	TOC	...E		EEC	≈kg
Acuro St 114...04	60 381...	...04	1 x 14	A+/A/B	1.5
Acuro St 114...04 PC	60 383...	...04	1 x 14	A+/A/B	1.5
Acuro St-S 114...04	60 382...	...04	1 x 14	A+/A/B	1.5
Acuro St-S 114...04 PC	60 384...	...04	1 x 14	A+/A/B	1.5

• IK02/0.2 J 650 °C

End caps

Reference	TOC	Accessory description	≈kg
Acuro ZKS 04	60 494 00	1 pair end caps of plastic, chrome-plated, mounted without tools	0.1