

AMON MAXI



● AN-96 / Anthracite gray / Textured




Range of lighting columns, comprising:

- Column in extruded polyester-powder coated aluminium
- The SOFT version comes complete with satinized UV stabilized polycarbonate diffuser
- Diffuser in internally frosted extra clear, tempered, flat glass
- Optical compartment in painted, die-cast aluminium
- Optical unit made of high transmittance technopolymer lenses or of purest polished and oxydized aluminium according to the models
- Anti-ageing silicone gasket
- Electrical connection via connecting box
- Porthole made of painted die-cast aluminium
- Dimmable driver 1-10 V ballast
- Stainless steel external screws
- Cable compartment in painted, die-cast aluminium
- Aesthetic painted die-cast aluminium flange cover for the base plate, available as accessory
- Installation can make use of the accessory stainless steel ground plate to anchor the device to cement
- Complete with supplementary device for protection against network surges of up to 10 kV (DM)
- Ground mounting flange in painted steel
- On request, versions with DALI dimming
- 3000 K and 5000 K available upon request



AMON MAXI
S/W
A/M
S/EW

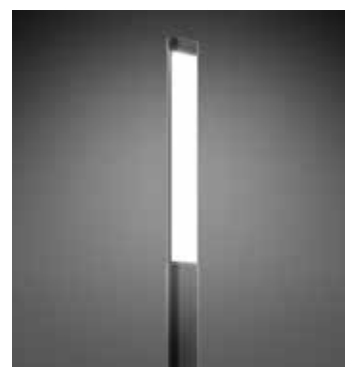

AMON MAXI
SOFT S/EW

AMON MAXI S/W

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	81 W	I	80	4000	•	S/W	-	10092 lm	3684 lm	70	10	80000 h	●	306063

AMON MAXI A/M

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	29 W	I	80	4000	•	A17/M	-	3120 lm	1526 lm	70	10	80000 h	●	306064
LED	29 W	I	80	4000	•	A30/M	-	3120 lm	1514 lm	70	10	80000 h	●	306065

AMON MAXI S/EW



IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	42 W	I	80	4000	•	S/EW	-	4992 lm	2081 lm	70	10	80000 h	●	306066

AMON MAXI SOFT S/EW


IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	85 W	I	80	4000	•	S/EW	-	7046 lm	4144 lm	70	10	50000 h	●	306067



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
AMON MAXI		
AMON AN-96 groundplate cover	●	310921
Flange plate with fixing rod		310922
Flange plate fixing root		310923



310921




310922



310923


max 36 kg

AMON MAXI

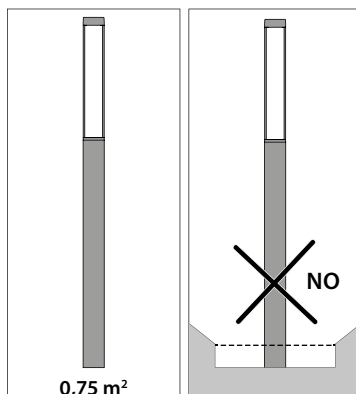


0,75 m²


AMON MAXI SOFT

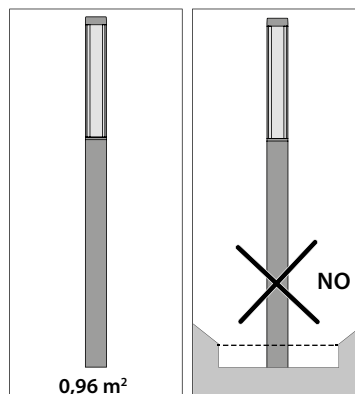

0,96 m²



H07RN-F / 5G 1,5/2,5 mm²



5x2,5 mm²