


ATHENIK

SQUARE DOWNLIGHTS



THE PLEASANT COMPANION

- The transparent, square frame with frosted light emission structure complements lucid room architecture.
- Standardised glare elimination for computer screen workstations.
- Time-saving, tool-free mounting thanks to the tried-and-proven mounting system.




switchable and dimmable (DALI),
switchable and dimmable (1...10 V), switchable



Emergency light version with individual battery,
1 hour



Various attachments



Cover for IP54 (on room side)



Recessed downlights with small C1 construction, with highly specular reflector (HR)





Cut-out opening 231 x 231 mm, recess depth 100 mm



Reference	TOC	...EDD	...ED	...E		EEC	≈kg
White							
• Athenik C1 HR 1TCD13...01	44 823...	-	-	...04	1 x TC-DEL 13	A	1.6
Athenik C1 HR 1TCT18...01	44 824...	...07	...05	...04	1 x TC-TEL 18	A/B	1.6
Athenik C1 HR 1TCT26/32...01	52 222...	...07	...05	...04	1 x TC-TEL 26/32	A	1.6
Athenik C1 HR 2TCD13...01	44 826...	-	-	...04	2 x TC-DEL 13	A	1.6
Athenik C1 HR 2TCT18...01	44 827...	...07	...05	...04	2 x TC-TEL 18	A/B	1.6
Athenik C1 HR 2TCT26/32...01	52 225...	...07	...05	...04	2 x TC-TEL 26/32	A	1.6
Silver-grey							
Athenik C1 HR 1TCD13...03	44 835...	-	-	...04	1 x TC-DEL 13	A	1.6
Athenik C1 HR 1TCT18...03	44 836...	...07	...05	...04	1 x TC-TEL 18	A/B	1.6
Athenik C1 HR 1TCT26/32...03	52 223...	...07	...05	...04	1 x TC-TEL 26/32	A	1.6
Athenik C1 HR 2TCD13...03	44 838...	-	-	...04	2 x TC-DEL 13	A	1.6
Athenik C1 HR 2TCT18...03	44 839...	...07	...05	...04	2 x TC-TEL 18	A/B	1.6
Athenik C1 HR 2TCT26/32...03	52 226...	...07	...05	...04	2 x TC-TEL 26/32	A	1.6


• IK03/0.35 J 850 °C

Recessed downlights with small C1 construction, with highly specular reflector (HR) and emergency inverter





Cut-out opening 231 x 231 mm, recess depth 100 mm



Reference	TOC	...E		EEC	=kg
White					
• Athenik C1 HR 1TCD13...EB1h 01	47 512...	...04	1 x TC-DEL 13	A	2.8
Athenik C1 HR 1TCT18...EB1h 01	47 515...	...04	1 x TC-TEL 18	A/B	2.8
Athenik C1 HR 1TCT26...EB1h 01	47 518...	...04	1 x TC-TEL 26	A	2.8
Silver-grey					
Athenik C1 HR 1TCD13...EB1h 03	47 513...	...04	1 x TC-DEL 13	A	2.8
Athenik C1 HR 1TCT18...EB1h 03	47 516...	...04	1 x TC-TEL 18	A/B	2.8
Athenik C1 HR 1TCT26...EB1h 03	47 519...	...04	1 x TC-TEL 26	A	2.8

• IK03/0.35 J 850 °C

Recessed downlights with small C1 construction, with semi-specular reflector (MR)





Cut-out opening 231 x 231 mm, recess depth 100 mm



Reference	TOC	...EDD	...ED	...E		EEC	≈kg
White							
Athenik C1 MR 1TCD13...01	44 829...	-	-	...04	1 x TC-DEL 13	A	1.6
Athenik C1 MR 1TCT18...01	44 830...	...07	...05	...04	1 x TC-TEL 18	A/B	1.6
Athenik C1 MR 1TCT26/32...01	52 228...	...07	...05	...04	1 x TC-TEL 26/32	A	1.6
Athenik C1 MR 2TCD13...01	44 832...	-	-	...04	2 x TC-DEL 13	A	1.6
Athenik C1 MR 2TCT18...01	44 833...	...07	...05	...04	2 x TC-TEL 18	A/B	1.6
Athenik C1 MR 2TCT26/32...01	52 231...	...07	...05	...04	2 x TC-TEL 26/32	A	1.6
Silver-grey							
Athenik C1 MR 1TCD13...03	44 841...	-	-	...04	1 x TC-DEL 13	A	1.6
Athenik C1 MR 1TCT18...03	44 842...	...07	...05	...04	1 x TC-TEL 18	A/B	1.6
Athenik C1 MR 1TCT26/32...03	52 229...	...07	...05	...04	1 x TC-TEL 26/32	A	1.6
Athenik C1 MR 2TCD13...03	44 844...	-	-	...04	2 x TC-DEL 13	A	1.6
Athenik C1 MR 2TCT18...03	44 845...	...07	...05	...04	2 x TC-TEL 18	A/B	1.6
Athenik C1 MR 2TCT26/32...03	52 232...	...07	...05	...04	2 x TC-TEL 26/32	A	1.6

• IK03/0.35 J 850 °C

Recessed downlights with small C1 construction, with semi-specular reflector (MR) and emergency inverter





Cut-out opening 231 x 231 mm, recess depth 100 mm



Reference	TOC	...E		EEC	=kg
White					
• Athenik C1 MR 1TCD13...EB1h 01	47 521...	...04	1 x TC-DEL 13	A	2.8
Athenik C1 MR 1TCT18...EB1h 01	47 524...	...04	1 x TC-TEL 18	A/B	2.8
Athenik C1 MR 1TCT26...EB1h 01	47 527...	...04	1 x TC-TEL 26	A	2.8
Silver-grey					
Athenik C1 MR 1TCD13...EB1h 03	47 522...	...04	1 x TC-DEL 13	A	2.8
Athenik C1 MR 1TCT18...EB1h 03	47 525...	...04	1 x TC-TEL 18	A/B	2.8
Athenik C1 MR 1TCT26...EB1h 03	47 528...	...04	1 x TC-TEL 26	A	2.8

• IK03/0.35 J 850 °C


Recessed downlights with large C2 construction, with highly specular reflector (HR)

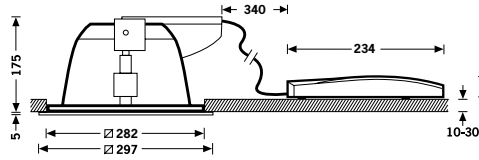

Cut-out opening 282 x 282 mm, recess depth 175 mm





IP20

Reference	TOC	...EDD	...ED	...E		EEC	≈kg
White							
• Athenik C2 HR 1TCT18...01	44 860...	...07	...05	...04	1 x TC-TEL 18	A/B	2.0
Athenik C2 HR 1TCT26/32/42...01	52 234...	...07	...05	...04	1 x TC-TEL 26/32/42	A	2.0
Athenik C2 HR 2TCT18...01	44 866...	...07	...05	...04	2 x TC-TEL 18	A/B	2.0
Athenik C2 HR 2TCT26/32/42...01	52 237...	...07	...05	...04	2 x TC-TEL 26/32/42	A	2.0
Silver-grey							
Athenik C2 HR 1TCT18...03	44 882...	...07	...05	...04	1 x TC-TEL 18	A/B	2.0
Athenik C2 HR 1TCT26/32/42...03	52 235...	...07	...05	...04	1 x TC-TEL 26/32/42	A	2.0
Athenik C2 HR 2TCT18...03	44 888...	...07	...05	...04	2 x TC-TEL 18	A/B	2.0
Athenik C2 HR 2TCT26/32/42...03	52 238...	...07	...05	...04	2 x TC-TEL 26/32/42	A	2.0

• IK03/0.35 J 850 °C

Recessed downlights with large C2 construction, with highly specular reflector (HR) and emergency inverter

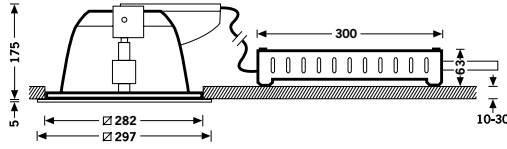



Cut-out opening 282 x 282 mm, recess depth 175 mm



Reference	TOC	...E		EEC	=kg
White					
• Athenik C2 HR 1TCT18...EB1h 01	47 530...	...04	1 x TC-TEL 18	A/B	3.0
Athenik C2 HR 1TCT26...EB1h 01	47 533...	...04	1 x TC-TEL 26	A	3.0
Silver-grey					
Athenik C2 HR 1TCT18...EB1h 03	47 531...	...04	1 x TC-TEL 18	A/B	3.0
Athenik C2 HR 1TCT26...EB1h 03	47 534...	...04	1 x TC-TEL 26	A	3.2

• IK03/0.35 J 850 °C

Recessed downlights with large C2 construction, with semi-specular reflector (MR)

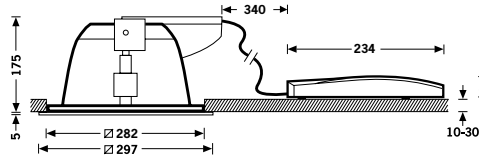



Cut-out opening 282 x 282 mm, recess depth 175 mm



Reference	TOC	...EDD	...ED	...E		EEC	≈kg
White							
• Athenik C2 MR 1TCT18...01	44 871...	...07	...05	...04	1 x TC-TEL 18	A/B	2.0
Athenik C2 MR 1TCT26/32/42...01	52 240...	...07	...05	...04	1 x TC-TEL 26/32/42	A	2.0
Athenik C2 MR 2TCT18...01	44 877...	...07	...05	...04	2 x TC-TEL 18	A/B	2.0
Athenik C2 MR 2TCT26/32/42...01	52 243...	...07	...05	...04	2 x TC-TEL 26/32/42	A	2.0
Silver-grey							
Athenik C2 MR 1TCT18...03	44 893...	...07	...05	...04	1 x TC-TEL 18	A/B	2.0
Athenik C2 MR 1TCT26/32/42...03	52 241...	...07	...05	...04	1 x TC-TEL 26/32/42	A	2.0
Athenik C2 MR 2TCT18...03	44 901...	...07	...05	...04	2 x TC-TEL 18	A/B	2.0
Athenik C2 MR 2TCT26/32/42...03	52 244...	...07	...05	...04	2 x TC-TEL 26/32/42	A	2.0

• IK03/0.35 J 850 °C

Recessed downlights with large C2 construction, with semi-specular reflector (MR) and emergency inverter

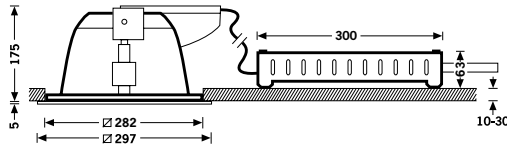



Cut-out opening 282 x 282 mm, recess depth 175 mm



Reference	TOC	...E		EEC	=kg
White					
• Athenik C2 MR 1TCT18...EB1h 01	47 536...	...04	1 x TC-TEL 18	A/B	3.2
Athenik C2 MR 1TCT26...EB1h 01	47 539...	...04	1 x TC-TEL 26	A	3.2
Silver-grey					
Athenik C2 MR 1TCT18...EB1h 03	47 537...	...04	1 x TC-TEL 18	A/B	3.2
Athenik C2 MR 1TCT26...EB1h 03	47 540...	...04	1 x TC-TEL 26	A	3.2

• IK03/0.35 J 850 °C

Recessed downlights with large C2 construction, with semi-specular reflector (MR), for high pressure lamps

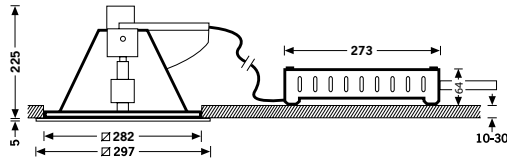



Cut-out opening 282 x 282 mm, recess depth 225 mm



Reference	TOC	...E		EEC	=kg
White					
• Athenik C2 MR 1HIT150...01	46 795...	...04	1 x HIT 150	A+	3.5
Silver-grey					
Athenik C2 MR 1HIT150...03	46 796...	...04	1 x HIT 150	A+	3.5


• IK03/0.35 J 850 °C

Recessed downlights with large C2 construction, with semi-specular reflector (MR), for high pressure lamps

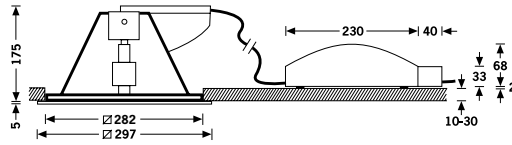


Cut-out opening 282 x 282 mm, recess depth 175 mm



Reference	TOC	...E		EEC	≈kg
White					
• Athenik C2 MR 1HIT70...01	44 876...	...04	1 x HIT 70	A+/A	2.1
Silver-grey					
Athenik C2 MR 1HIT70...03	44 899...	...04	1 x HIT 70	A+/A	2.1

• IK03/0.35 J 850 °C

Decorative rings




Reference	TOC	Accessory description	≈kg
Athenik C1 DR	44 792 00	Decorative ring, of clear glass, thickness 8 mm, for Athenik C1	0.8
Athenik C1 DR-BL	44 808 00	Decorative ring, of blue-tinted glass, thickness 5 mm, for Athenik C1	0.5
Athenik C1 DR-M	44 809 00	Decorative ring, of frosted glass, thickness 8 mm, for Athenik C1	0.8
Athenik C2 DR	44 801 00	Decorative rings, of clear glass, thickness 10 mm, for Athenik C2	1.2
Athenik C2 DR-BL	44 816 00	Decorative ring, of blue-tinted glass, thickness 5 mm, for Athenik C2	1.2
Athenik C2 DR-M	44 817 00	Decorative ring, of frosted glass, thickness 10 mm, for Athenik C2	1.5

Decorative covers



Reference	TOC	Accessory description	=kg
Athenik C1 DA 01	44 789 00	Decorative disc, clear glass, integrated in decorative ceiling ring, for IP54 protection rating on room side, white, for Athenik C1	1.0
Athenik C1 DA 03	44 790 00	Decorative disc, clear glass, integrated in decorative ceiling ring, for IP54 protection rating on room side, silver grey, for Athenik C1	1.0
Athenik C1 DA-M 01	44 800 00	Decorative disc, frosted glass, integrated in decorative ceiling ring, for IP54 protection rating on room side, white, for Athenik C1	1.0
Athenik C1 DA-M 03	44 791 00	Decorative disc, frosted glass, integrated in decorative ceiling ring, for IP54 protection rating on room side, silver grey, for Athenik C1	1.0
Athenik C2 DA 01	45 293 00	Decorative disc, clear glass, integrated in decorative ceiling ring, for IP54 protection rating on room side, white, for Athenik C2	1.4
Athenik C2 DA 03	44 799 00	Decorative disc, clear glass, integrated in decorative ceiling ring, for IP54 protection rating on room side, silver grey, for Athenik C2	1.4
Athenik C2 DA-M 01	45 780 00	Decorative disc, frosted glass, integrated in decorative ceiling ring, for IP54 protection rating on room side, white, for Athenik C2	1.4
Athenik C2 DA-M 03	44 802 00	Decorative disc, frosted glass, integrated in decorative ceiling ring, for IP54 protection rating on room side, silver grey, for Athenik C2	1.4

Decorative accessories



Reference	TOC	Accessory description	≈kg
Athenik C1 DS-8	44 812 00	Decorative disc, of clear glass, thickness 8 mm, for Athenik C1	1.2
Athenik C1 DS-M	44 813 00	Decorative disc, of frosted glass, thickness 8 mm, for Athenik C1	1.6
Athenik C1 DS-MC	45 778 00	Decorative disc, with glass in Master Carree design, thickness 8 mm, for Athenik C1	1.2
Athenik C1 DS-SC	44 814 00	Decorative disc, with glass in chessboard design, thickness 8 mm, for Athenik C1	1.2
Athenik C1 DS-SQ	44 815 00	Decorative disc, of part-frosted glass, thickness 8 mm, for Athenik C1	1.2
Athenik C2 DS-10	44 819 00	Decorative disc, of clear glass, thickness 10 mm, for Athenik C2	2.1
Athenik C2 DS-M	44 821 00	Decorative disc, of frosted glass, thickness 10 mm, for Athenik C2	2.5
Athenik C2 DS-MC	45 781 00	Decorative disc, with glass in Master Carree design, thickness 10 mm, for Athenik C2	2.1
Athenik C2 DS-SC	45 782 00	Decorative disc, with glass in chessboard design, thickness 10 mm, for Athenik C2	2.1
Athenik C2 DS-SQ	44 822 00	Decorative disc, of part-frosted glass, thickness 10 mm, for Athenik C2	2.1

Cross-blade louvres



Reference ¹⁾	TOC	Accessory description	≈kg
Athenik C1 RA-HR	45 246 00	Cross-blade louvre of reflection-intensifying coated aluminium, highly specular, for Athenik C1	0.1
Athenik C1 RA-MR	45 779 00	Cross-blade louvre of reflection-intensifying coated aluminium, semi-specular, for Athenik C1	0.1
Athenik C2 RA-HR	45 247 00	Cross-blade louvre of reflection-intensifying coated aluminium, highly specular, for Athenik C2	0.1
Athenik C2 RA-MR	45 245 00	Cross-blade louvre of reflection-intensifying coated aluminium, semi-specular, for Athenik C2	0.1

¹⁾ Not in combination with Athenik--HIT... and --SDW-TG... (version for high pressure lamps)

Wallwasher optics




Reference ¹⁾²⁾	TOC	Accessory description	=kg
Athenik C1 WW-HR	46 782 00	Wallwasher optic for retro-fitting in Athenik reflectors, highly specular	0.1
Athenik C1 WW-MR	46 783 00	Wallwasher optic for retro-fitting in Athenik reflectors, semi-specular	0.1
Athenik C2 WW-HR	46 784 00	Wallwasher optic for retro-fitting in Athenik reflectors, highly specular	0.1
Athenik C2 WW-MR	46 785 00	Wallwasher optic for retro-fitting in Athenik reflectors, semi-specular	0.1

¹⁾Only suitable for 1-lamp versions

²⁾Not in combination with Athenik---HIT--- and ---SDW-TG--- (version for high pressure lamps)

Recessing cassettes for panel ceilings



Reference	TOC	Accessory description	=kg
Athenik C1 MP 300	44 795 00	Recessing cassette for panel ceilings, module 100, for Athenik C1	1.8
Athenik C2 MP 400	44 805 00	Recessing cassette for panel ceilings, module 100, for Athenik C2	2.3

Concrete casting boxes



Reference	TOC	Accessory description	=kg
Athenik C1 BE	44 788 00	Concrete casting box for Athenik C1	2.8
Athenik C2 BE H=175	44 798 00	Concrete casting box for Athenik C2	5.0
Athenik C2 BE H=225	46 819 00	Concrete casting box, for ---HIT150---	6.1

Mounting plates



Reference	TOC	Accessory description	=kg
Athenik C1 MP 600	44 796 00	Mounting plate, for reinforcing of ceiling plates, module 600, for Athenik C1	2.0
Athenik C1 MP 625	44 797 00	Mounting plate, for reinforcing of ceiling plates, module 625, for Athenik C1	2.1
Athenik C2 MP 600	44 806 00	Mounting plate, for reinforcing of ceiling plates, module 600, for Athenik C2	2.5
Athenik C2 MP 625	44 807 00	Mounting plate, for reinforcing of ceiling plates, module 625, for Athenik C2	3.8