

BELVISO D LED

FLAT SURFACE-MOUNTED
LUMINAIRES WITH
MICROPRISMS



















THE STANDARD FOR EFFICIENCY AND ATTRACTIVE LIGHT

- The outstanding efficiency of 109 lm/W leads to massive energy savings of up to 40 % compared to T5.
- Completely homogeneous illumination creates a feel-good atmosphere for workstations.
- Exclusive light frame creates an unmistakable light appearance with a soft transition to the ceiling.
- Coloured light guides for individual light atmospheres.





-  
-  
-  
-  ✓
-   
-  > 50,000 h
-  switchable and dimmable (DALI), switchable
-  & Light management system with day/night rhythm and white-white control

Lateral light aura





Highly efficient surface-mounted LED luminaires with optimised microprisms (CDP)



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
LED for colour temperature-adjustable lighting							
• BelvisoAct D CDP LED 4300...	61 968...	...51	-	8600 lm	A++/A+/A	116	9.2
BelvisoAct D CDP LED 4300...+TLM	61 923...	...51	-	8600 lm	A++/A+/A	116	9.9
LED							
Belviso D CDP LED 3900 nw...01	60 669...	...51	...40	3800 lm	A++/A+/A	35	8.6
LED, with coloured light frame							
Belviso D CDP LED 3800 nw...FB 01	61 133...	...51	-	3800 lm	A++/A+/A	35	8.6
Belviso D CDP LED 3800 nw...FG 01	61 135...	...51	-	3800 lm	A++/A+/A	35	8.6
Belviso D CDP LED 3800 nw...FO 01	61 137...	...51	-	3800 lm	A++/A+/A	35	8.6
Belviso D CDP LED 3800 nw...FR 01	61 139...	...51	-	3800 lm	A++/A+/A	35	8.6
Belviso D CDP LED 3800 nw...FY 01	61 141...	...51	-	3800 lm	A++/A+/A	35	8.6

• IK02/0,2 J 650 °C

Highly efficient surface-mounted LED luminaires with optimised microprisms (CDP)

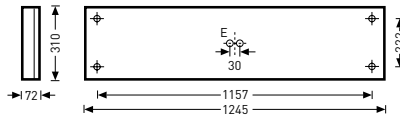

Reference	TOC	...ETDD	...ET		EEC	W	=kg
LED							
• Belviso D2 CDP LED 3800 nw...01	61 144...	...51	...40	3800 lm	A++/A+/A	35	8.5
LED, with coloured light frame							
Belviso D2 CDP LED 3800 nw...FB 01	61 134...	...51	-	3800 lm	A++/A+/A	35	8.5
Belviso D2 CDP LED 3800 nw...FG 01	61 136...	...51	-	3800 lm	A++/A+/A	35	8.5
Belviso D2 CDP LED 3800 nw...FO 01	61 138...	...51	-	3800 lm	A++/A+/A	35	8.5
Belviso D2 CDP LED 3800 nw...FR 01	61 140...	...51	-	3800 lm	A++/A+/A	35	8.5
Belviso D2 CDP LED 3800 nw...FY 01	61 142...	...51	-	3800 lm	A++/A+/A	35	8.5

• IK02/0.2 J 650 °C