




# BLIZ SQUARE 40

design by R. FIORATO - F. PAGLIARINI

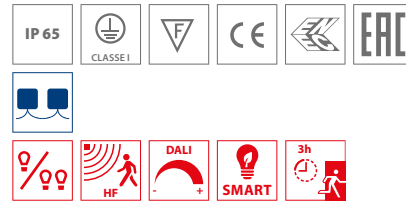


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

- Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:
- Body, trim and guard made of die-cast pressed aluminium, painted
  - Pressed glass diffuser, painted inside
  - Silicone gasket
  - Through wiring possible
  - Dimmable DALI
  - Supplied with SMD self-heat dissipating power LED metal core board: FUTURE-PROOF™
  - Stainless steel locking screws
  - EM/3P version is designed for multipurpose and 3 hours sustained emergency lighting
  - Hyper-frequency (HF) sensor operating at a frequency of 5.8 Ghz+/- 75 Mhz
  - Powder polyester painting process optimized against UV rays in 13 different steps
  - SMART versions are equipped with customised electronic devices that allows energy savings reducing the luminous flux, whilst providing a 30% working flux for safety lighting and reaching 100% flux when necessary
  - SMART HF versions are complete with integrated High Frequency sensor that operates from 30% up to 100% of the flux when it detects the presence of people
  - SMART DA versions are suitable for use in systems with two separate lines where the demand for 100% of the flux is managed by a push button or line sensor




BLIZ SQUARE 40



BLIZ SQUARE 40 /G

Fixing holes





BLIZ SQUARE 40



OFF  
0%



DIM  
1% - 100%



BLIZ SQUARE 40  
HF



OFF  
0%



HF (DETEK)  
100%



BLIZ SQUARE 40  
EM/3P



OFF  
0%



ON  
100%



EM/3P - 3h



BLIZ SQUARE 40  
SMART HF



OFF  
0%



HF (DETEK)  
100%



SMART  
30%



BLIZ SQUARE 40  
SMART DA



OFF  
0%




DA  
100%



SMART  
30%




CEILING SURFACE MOUNTED



A	B
max 2,6 m	Ø 10 m

WALL MOUNTED




A	B
max 1,8 m	Ø 10 m

## BLIZ SQUARE 40

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	☑	CRI	KELVIN	COS $\theta$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304650</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304647</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304651</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304648</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	<b>304652</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	<b>304649</b>



OFF 0% DIM 1% - 100%


### Power LED - dimmable DALI 220-240 V 50/60 Hz

LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304662</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304659</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304663</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304660</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	<b>304664</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	<b>304661</b>

## BLIZ SQUARE 40 HF

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	☑	CRI	KELVIN	COS $\theta$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304674</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304671</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304675</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304672</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	<b>304676</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	<b>304673</b>




OFF 0% HF (DETEK) 100%

## BLIZ SQUARE 40 SMART HF

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	☑	CRI	KELVIN	COS $\theta$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304686</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304683</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304687</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304684</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	<b>304688</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	<b>304685</b>




OFF 0% HF (DETEK) 100% SMART 30%

## BLIZ SQUARE 40 SMART HF EM/3P

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	☑	CRI	KELVIN	COS $\theta$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304723</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304720</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304724</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304721</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304722</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	<b>304725</b>




OFF 0% ON 100% EM/3P - 3h

## BLIZ SQUARE 40 SMART DA

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	☑	CRI	KELVIN	COS $\theta$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304680</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304677</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304681</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304678</b>
LED	39 W	I	•	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	<b>304682</b>
LED	39 W	I	•	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	<b>304679</b>




OFF 0% DA 100% SMART 30%

## BLIZ SQUARE 40 EM/3P

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED - Emergency 220-240 V 50/60 Hz</b>														
LED	39 W	I	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304668</b>
LED	39 W	I	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304665</b>
LED	39 W	I	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304669</b>
LED	39 W	I	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304666</b>
LED	39 W	I	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	<b>304670</b>
LED	39 W	I	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	<b>304667</b>




OFF 0% ON 100% EM/3P - 3h

## BLIZ SQUARE 40/G

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>														
LED	39 W	I	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304782</b>
LED	39 W	I	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304779</b>
LED	39 W	I	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304783</b>
LED	39 W	I	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304780</b>
LED	39 W	I	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	<b>304784</b>
LED	39 W	I	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	<b>304781</b>




OFF 0% DIM 1% - 100%

### Power LED - dimmable DALI 220-240 V 50/60 Hz

LED	39 W	I	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304788</b>
LED	39 W	I	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304785</b>
LED	39 W	I	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	<b>304789</b>
LED	39 W	I	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	<b>304786</b>
LED	39 W	I	80	4000	•	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	<b>304790</b>
LED	39 W	I	80	3000	•	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	<b>304787</b>

## OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
BLIZ SQUARE 40		
Polycarbonate diffusor		<b>310255</b>



**310255**

# BLIZ ROUND 30/40


design by R. FIORATO - F. PAGLIARINI



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:


- Die-cast painted aluminium housing and trim
- Pressed glass diffuser, painted inside
- Silicone gasket
- Through wiring possible
- Analogue dimmable HF ballast, 1-10 V
- Dimmable DALI
- Supplied with SMD self-heat dissipating power LED metal core board: FUTURE-PROOF™
- Stainless steel locking screws
- EM/3P version is designed for multipurpose and 3 hours sustained emergency lighting
- Hyper-frequency (HF) sensor operating at a frequency of 5.8 Ghz+/- 75 Mhz
- SMART versions are equipped with customised electronic devices that allows energy savings reducing the luminous flux, whilst providing a 30% working flux for safety lighting and reaching 100% flux when necessary
- SMART HF versions are complete with integrated High Frequency sensor that operates from 30% up to 100% of the flux when it detects the presence of people
- SMART DA versions are suitable for use in systems with two separate lines where the demand for 100% of the flux is managed by a push button or line sensor

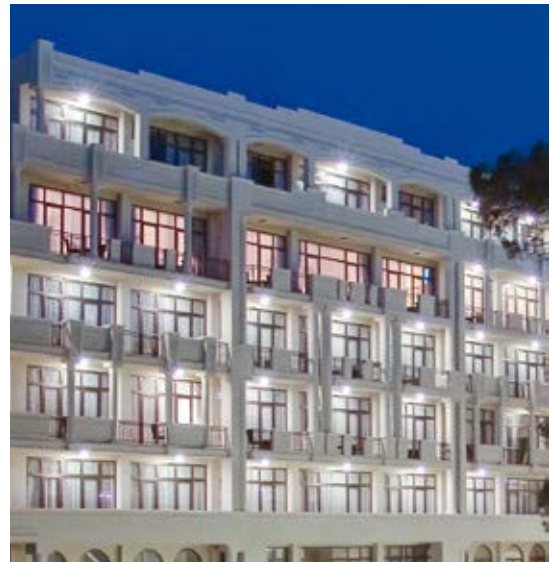

BLIZ ROUND  
30



BLIZ ROUND  
40

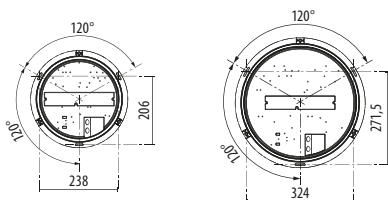



BLIZ ROUND



OFF  
0%



DIM  
1% - 100%



BLIZ ROUND  
HF



OFF  
0%



HF (DETEK)  
100%



BLIZ ROUND  
EM/3P



OFF  
0%



ON  
100%



EM/3P - 3h




BLIZ ROUND  
SMART HF



OFF  
0%



HF (DETEK)  
100%



SMART  
30%




BLIZ ROUND  
SMART DA



OFF  
0%




DA  
100%



SMART  
30%




CEILING SURFACE MOUNTED



A	B
max 2,6 m	Ø 10 m

WALL MOUNTED




A	B
max 1,8 m	Ø 10 m

## BLIZ ROUND 30

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	 CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>														
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304215</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304212</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304216</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304213</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	○	<b>304217</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	○	<b>304214</b>
LED	21.5 W	I	80	4000	•	S/EW	-	3229 lm	1673 lm	80	10	60000 h	●	<b>304245</b>
LED	21.5 W	I	80	3000	•	S/EW	-	3014 lm	1555 lm	80	10	60000 h	●	<b>304242</b>
LED	21.5 W	I	80	4000	•	S/EW	-	3229 lm	1673 lm	80	10	60000 h	●	<b>304246</b>
LED	21.5 W	I	80	3000	•	S/EW	-	3014 lm	1555 lm	80	10	60000 h	●	<b>304243</b>
LED	21.5 W	I	80	4000	•	S/EW	-	3229 lm	1673 lm	80	10	60000 h	○	<b>304247</b>
LED	21.5 W	I	80	3000	•	S/EW	-	3014 lm	1555 lm	80	10	60000 h	○	<b>304244</b>




OFF 0% DIM 1% - 100%


### Power LED - dimmable DALI 220-240 V 50/60 Hz

LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304227</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304224</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304228</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304225</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	○	<b>304229</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	○	<b>304226</b>

## BLIZ ROUND 30 HF

IK08 5J xx5


LAMPHOLDER	WATTAGE	CLASS	 CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 230 V 50 Hz</b>														
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304251</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304248</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304252</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304249</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	○	<b>304253</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	○	<b>304250</b>




OFF 0% HF (DETEK) 100%

## BLIZ ROUND 30 SMART HF

IK08 5J xx5


LAMPHOLDER	WATTAGE	CLASS	 CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 230 V 50 Hz</b>														
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304316</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304315</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304318</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304317</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	○	<b>304320</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	○	<b>304319</b>




OFF 0% HF (DETEK) 100% SMART 30%

## BLIZ ROUND 30 SMART DA

IK08 5J xx5


LAMPHOLDER	WATTAGE	CLASS	 CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>														
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304310</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304309</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	<b>304312</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	<b>304311</b>
LED	30 W	I	80	4000	•	S/EW	-	4539 lm	2343 lm	80	10	60000 h	○	<b>304314</b>
LED	30 W	I	80	3000	•	S/EW	-	4236 lm	2178 lm	80	10	60000 h	○	<b>304313</b>




OFF 0% DA 100% SMART 30%

## BLIZ ROUND 30 EM/3P

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	 CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED- Emergency 220-240 V 50/60 Hz</b>														
LED	21.5 W	I	80	4000	•	S/EW	-	3229 lm	1673 lm	80	10	60000 h	●	<b>304239</b>
LED	21.5 W	I	80	3000	•	S/EW	-	3014 lm	1555 lm	80	10	60000 h	●	<b>304236</b>
LED	21.5 W	I	80	4000	•	S/EW	-	3229 lm	1673 lm	80	10	60000 h	●	<b>304240</b>
LED	21.5 W	I	80	3000	•	S/EW	-	3014 lm	1555 lm	80	10	60000 h	●	<b>304237</b>
LED	21.5 W	I	80	4000	•	S/EW	-	3229 lm	1673 lm	80	10	60000 h	○	<b>304241</b>
LED	21.5 W	I	80	3000	•	S/EW	-	3014 lm	1555 lm	80	10	60000 h	○	<b>304238</b>




OFF 0% ON 100% EM/3P - 3h

**BLIZ ROUND 40**

IK06 1J xx3

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304257</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304254</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304258</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304255</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	○	<b>304259</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	○	<b>304256</b>
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>															
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304269</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304266</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304270</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304267</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	○	<b>304271</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	○	<b>304268</b>




OFF 0% DIM 1% - 100%

**BLIZ ROUND 40 HF**

IK06 1J xx3

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 230 V 50 Hz</b>															
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304293</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304290</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304294</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304291</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	○	<b>304295</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	○	<b>304292</b>



OFF 0% HF (DETEK) 100%

**BLIZ ROUND 40 SMART HF**

IK06 1J xx3

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 230 V 50 Hz</b>															
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304328</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304327</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304330</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304329</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	○	<b>304332</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	○	<b>304331</b>



OFF 0% HF (DETEK) 100% SMART 30%

**BLIZ ROUND 40 SMART DA**

IK06 1J xx3

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304322</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304321</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304324</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304323</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	○	<b>304326</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	○	<b>304325</b>



OFF 0% DA 100% SMART 30%

**BLIZ ROUND 40 EM/3P**

IK06 1J xx3

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED- Emergency 220-240 V 50/60 Hz</b>															
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304281</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304278</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	<b>304282</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	<b>304279</b>
LED	39 W	I		80	4000	•	S/EW	-	5998 lm	2912 lm	80	10	60000 h	○	<b>304283</b>
LED	39 W	I		80	3000	•	S/EW	-	5798 lm	2739 lm	80	10	60000 h	○	<b>304280</b>



OFF 0% ON 100% EM/3P - 3h



# BLIZ

design by R. FIORATO - F. PAGLIARINI



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

Range of indoor et outdoor luminaires for ceiling, wall and post mounted comprising:

- Die-cast painted aluminium housing, trim, guard and screen
- Pressed glass diffuser, white painted inside
- EPDM gasket
- Supplied with SMD self-heat dissipating power LED metal core board: FUTURE-PROOF™
- The SUPERVISA version is compliant with anti-light pollution regulations
- Stainless steel locking screws



BLIZ RING

BLIZ GUARD

BLIZ SUPERVISA


BLIZ SPLIT

BLIZ VISA

BLIZ VISA V




Customised covers (with logos, letters, etc.) are available upon request.



## Package size

46 x 29 x 31 cm  
(master x 6)


## Fixing holes



## BLIZ LED RING

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	14 W	I	-	4000	•	S/EW	-	-	1642 lm	842 lm	80	10	50000 h	●	<b>303413</b>
LED	14 W	I	-	3000	•	S/EW	-	-	1555 lm	734 lm	80	10	50000 h	●	<b>303412</b>
LED	14 W	I	-	4000	•	S/EW	-	-	1642 lm	842 lm	80	10	50000 h	●	<b>303415</b>
LED	14 W	I	-	3000	•	S/EW	-	-	1555 lm	734 lm	80	10	50000 h	●	<b>303414</b>



## BLIZ RING

IK07 2J xx5


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
E27	1x60 W	I	•	-	-	-	S/EW	-	-	-	-	-	-	●	<b>700192</b>
E27	1x60 W	I	•	-	-	-	S/EW	-	-	-	-	-	-	●	<b>700193</b>

◀▶ Dulux EL Longlife E27 1x20W / ▶▶ Dulux EL Longlife E27 1x23W

## BLIZ LED GUARD

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	14 W	I	-	4000	•	S/EW	-	-	1642 lm	554 lm	80	10	50000 h	●	<b>303417</b>
LED	14 W	I	-	3000	•	S/EW	-	-	1555 lm	483 lm	80	10	50000 h	●	<b>303416</b>
LED	14 W	I	-	4000	•	S/EW	-	-	1642 lm	554 lm	80	10	50000 h	●	<b>303419</b>
LED	14 W	I	-	3000	•	S/EW	-	-	1555 lm	483 lm	80	10	50000 h	●	<b>303418</b>



## BLIZ GUARD

IK07 2J xx5


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
E27	1x60 W	I	•	-	-	-	S/EW	-	-	-	-	-	-	●	<b>700195</b>
E27	1x60 W	I	•	-	-	-	S/EW	-	-	-	-	-	-	●	<b>700196</b>

◀▶ Dulux EL Longlife E27 1x20W / ▶▶ Dulux EL Longlife E27 1x23W

## BLIZ LED VISA

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	14 W	I	-	4000	•	S/EW	-	-	1642 lm	521 lm	80	10	50000 h	●	<b>303421</b>
LED	14 W	I	-	3000	•	S/EW	-	-	1555 lm	450 lm	80	10	50000 h	●	<b>303420</b>
LED	14 W	I	-	4000	•	S/EW	-	-	1642 lm	521 lm	80	10	50000 h	●	<b>303423</b>
LED	14 W	I	-	3000	•	S/EW	-	-	1555 lm	450 lm	80	10	50000 h	●	<b>303422</b>



## BLIZ VISA

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
E27	1x60 W	I	•	-	-	-	A/EW	-	-	-	-	-	-	●	<b>700198</b>
E27	1x60 W	I	•	-	-	-	A/EW	-	-	-	-	-	-	●	<b>700199</b>

◀▶ Dulux EL Longlife E27 1x20W / ▶▶ Dulux EL Longlife E27 1x23W

## BLIZ LED VISA/V

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	14 W	I	-	4000	•	S/EW	-	1642 lm	554 lm	80	10	50000 h	●	<b>303425</b>
LED	14 W	I	-	3000	•	S/EW	-	1555 lm	484 lm	80	10	50000 h	●	<b>303424</b>
LED	14 W	I	-	4000	•	S/EW	-	1642 lm	554 lm	80	10	50000 h	●	<b>303427</b>
LED	14 W	I	-	3000	•	S/EW	-	1555 lm	484 lm	80	10	50000 h	●	<b>303426</b>




## BLIZ VISA V

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
E27	1x60 W	I	•	-	-	A/EW	-	-	-	-	-	-	●	<b>700204</b>
E27	1x60 W	I	•	-	-	A/EW	-	-	-	-	-	-	●	<b>700205</b>

◀▶ Dulux EL Longlife E27 1x20W / ▶▶ Dulux EL Longlife E27 1x23W




## BLIZ SUPERVISA

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
E27	1x60 W	I	•	-	-	A/EW	-	-	-	-	-	-	●	<b>700201</b>
E27	1x60 W	I	•	-	-	A/EW	-	-	-	-	-	-	●	<b>700202</b>

◀▶ Dulux EL Longlife E27 1x20W / ▶▶ Dulux EL Longlife E27 1x23W




## BLIZ SPLIT

IK07 2J xx5


LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
E27	1x60 W	I	•	-	-	S/EW	-	-	-	-	-	-	●	<b>700403</b>
E27	1x60 W	I	•	-	-	S/EW	-	-	-	-	-	-	●	<b>700404</b>

◀▶ Dulux EL Longlife E27 1x20W / ▶▶ Dulux EL Longlife E27 1x23W



## OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
<b>BLIZ</b>		
Post Bliz H.500	●	<b>315027</b>
Post Bliz H.500	●	<b>315028</b>
Post Bliz H.1000	●	<b>315025</b>
Post Bliz H.1000	●	<b>315026</b>




### Complete unit

1A+1B = please order 2 codes  
2A+1B = please order 3 codes

### COMPONENTS

**A** luminaire  
**B** pole



**315027**  
**315028**

**315025**  
**315026**