


# Cuadro

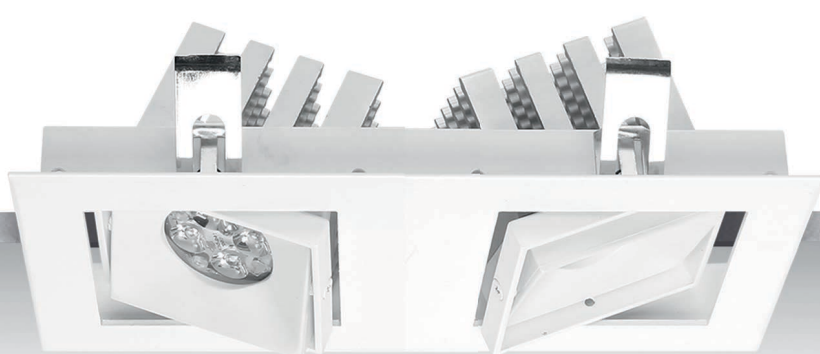

The praise of the square, the perfect shape for modern minimalist settings: **a modular recessed system** with springs for mounting on false ceilings ensuring simple installation both on walls and ceilings. It also provides the possibility to choose 1- to 3-casing modules with spotlights fitted with powerLED sources.

**Passive heat dissipation**

aluminium casing

**Light management**



Three optics available for optimum design flexibility

**Functional modularity**

Three versions with different sizes and powers




**Cuadro\_1** | Downlight | powerLED 6 W 500 mA



type		colour			optic	
White	CRI 80 <b>91021</b>	3000 K	712 lm	<b>W</b>	15°	<b>15</b>
Nickel	CRI 80 <b>91020</b>	4000 K	760 lm	<b>N</b>	30°	<b>30</b>
		5000 K	864 lm	<b>C</b>	60°	<b>60</b>
R - G - B - Y on request						


<b>99128</b>	<b>99115</b>	<b>99114</b>	<b>84797</b>
ON/OFF 1 art.	1-10V 1 - 3 art.	DALI 1 - 3 art.	Outer casing

**Cuadro\_2** | Downlight | 180-300 V | powerLED 12 W 500 mA



type		colour			optic	
White	CRI 80 <b>91041</b>	3000 K	1424 lm	<b>W</b>	15°	<b>15</b>
Nickel	CRI 80 <b>91040</b>	4000 K	1520 lm	<b>N</b>	30°	<b>30</b>
		5000 K	1728 lm	<b>C</b>	60°	<b>60</b>
R - G - B - Y on request						

**Cuadro\_3** | Downlight | 180-300 V | powerLED 18 W 500 mA



type		colour			optic	
White	CRI 80 <b>91065</b>	3000 K	2136 lm	<b>W</b>	15°	<b>15</b>
Nickel	CRI 80 <b>91064</b>	4000 K	2280 lm	<b>N</b>	30°	<b>30</b>
		5000 K	2592 lm	<b>C</b>	60°	<b>60</b>
R - G - B - Y on request						

**Cuadro** | Outer-casing



type	w. mm	h. mm	suitable for
PVC	117 x 117	73	Cuadro_1 <b>84797</b>



