


Dave Pro

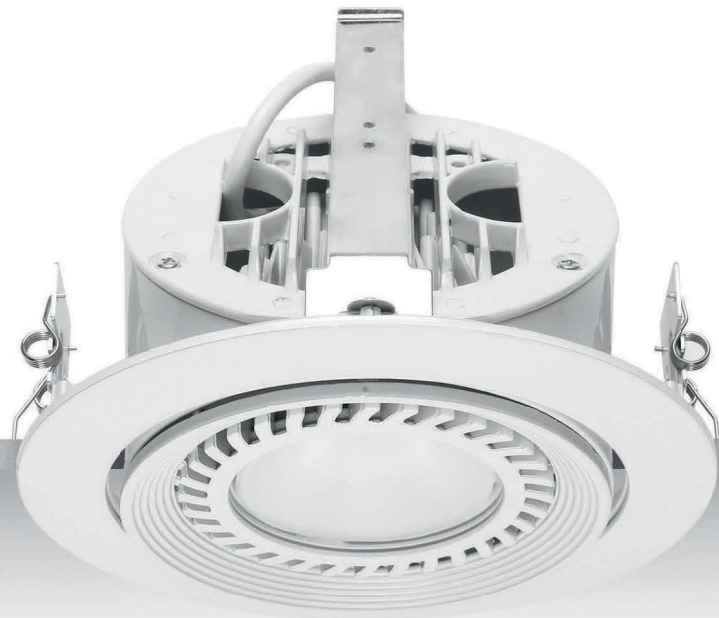

Elegant round recessed spotlight featuring **360-degree rotation and a variety of direction options**. The highly-performing top-quality arrayLED guarantees clean light, without producing any unwelcome multiple shadows.

Passive heat dissipation

Aluminium casing

Light management



Two optics that are interchangeable according to needs (can be ordered separately)

Functional supply

Easy-plug cable for quick and safe electric connection



Dave Pro_1 | Downlight | arrayLED 25 W 720 mA





| type | | colour | | | optic | |
|-------|---------------------|--------|---------|----------|-------|-----------|
| White | CRI 95 97448 | 3000 K | 2511 lm | W | 30° | 30 |
| Black | CRI 95 97449 | 4000 K | 2695 lm | N | 60° | 60 |

| | | | | | | |
|-------|---------------------|--------|---------|----------|-----|-----------|
| White | CRI 80 97452 | 3000 K | 3321 lm | W | 30° | 30 |
| Black | CRI 80 97453 | 4000 K | 3568 lm | N | 60° | 60 |

| | | | | |
|------------------|-----------------------|----------------|--------------|--------------|
| | | | | |
| 99112 | 99188 | 99330 | 98071 | 98072 |
| ON/OFF 1 art. | 1-10V, DALI 1 art. | DALI 1 art. | 30° Optic | 60° Optic |

Dave Pro_1 | Downlight | arrayLED 35 W 950 mA





| type | | colour | | | optic | |
|-------|---------------------|--------|---------|----------|-------|-----------|
| White | CRI 95 91374 | 3000 K | 3084 lm | W | 15° | 15 |
| Black | CRI 95 91376 | 4000 K | 3542 lm | N | 30° | 30 |
| | | | | | 60° | 60 |

| | | | | | | |
|-------|---------------------|--------|---------|----------|-----|-----------|
| White | CRI 80 91378 | 3000 K | 4323 lm | W | 15° | 15 |
| Black | CRI 80 91383 | 4000 K | 4323 lm | N | 30° | 30 |
| | | | | | 60° | 60 |

| | | | | | |
|------------------|-----------------------|--|--------------|--------------|--------------|
| | | | | | |
| 99146 | 99241 | | 98507 | 98508 | 98509 |
| ON/OFF 1 art. | 1-10V, DALI 1 art. | | 15° Optic | 30° Optic | 60° Optic |

Dave Pro_2 | Downlight | arrayLED 30 W 840 mA




| type | | colour | | | optic | |
|-------|---------------------|--------|---------|----------|-------|-----------|
| White | CRI 95 97454 | 3000 K | 3034 lm | W | 10° | 10 |
| Black | CRI 95 97455 | 4000 K | 3244 lm | N | 30° | 30 |
| | | | | | 60° | 60 |

| | | | | | | |
|-------|---------------------|--------|---------|----------|-----|-----------|
| White | CRI 80 97458 | 3000 K | 4014 lm | W | 10° | 10 |
| Black | CRI 80 97459 | 4000 K | 4294 lm | N | 30° | 30 |
| | | | | | 60° | 60 |

| | | | | | |
|------------------|-----------------------|----------------|--------------|--------------|--------------|
| | | | | | |
| 99093 | 99187 | 99330 | 98259 | 98260 | 98261 |
| ON/OFF 1 art. | 1-10V, DALI 1 art. | DALI 1 art. | 10° Optic | 30° Optic | 60° Optic |

Dave Pro_2 | Downlight | arrayLED 40 W 1100 mA



| type | | colour | | | optic | |
|-------|---------------------|--------|---------|----------|-------|-----------|
| White | CRI 95 97456 | 3000 K | 3816 lm | W | 10° | 10 |
| Black | CRI 95 97457 | 4000 K | 4081 lm | N | 30° | 30 |
| | | | | | 60° | 60 |

| | | | | | | |
|-------|---------------------|--------|---------|----------|-----|-----------|
| White | CRI 80 97460 | 3000 K | 5041 lm | W | 10° | 10 |
| Black | CRI 80 97461 | 4000 K | 5391 lm | N | 30° | 30 |
| | | | | | 60° | 60 |

| | | | | | |
|------------------|-----------------------|--|--------------|--------------|--------------|
| | | | | | |
| 99252 | 99254 | | 98259 | 98260 | 98261 |
| ON/OFF 1 art. | 1-10V, DALI 1 art. | | 10° Optic | 30° Optic | 60° Optic |

