
Gypsum_Ill

Modular light

Available in three flush versions: organic, square and rectangular module. The suggested options guarantee highest flexibility for a better lighting effects management.

- + **modular and invisible frame light**
- + **LED source**
- + **highest flexibility and custom finishes**






Gypsum_Ill

High performance

Illuminator modules provide a high performance with a low consumption (max 30W), also granting intensities of 28000cd along the axis. An efficiency higher than 100lm/W and the possibility to choose among three different beam openings make this product a striking lighting solution for retail and hospitality.

Optics

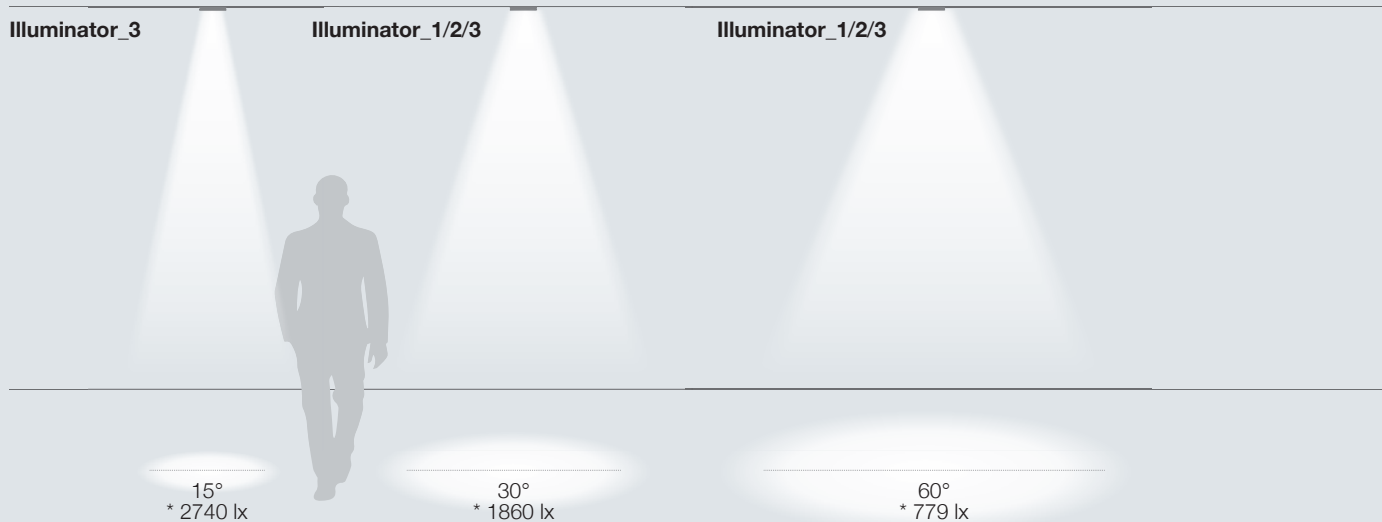

* Indicative lux values Illuminator_3 (H 3mt)

Fast installation


Once chalk frame is fixed on installation plan, it's enough entering the fixture with a single snap inside the dedicated compartment. Electrical connection is provided by a fast connector prepared on fixture.








Gypsum_III1 | Downlights |

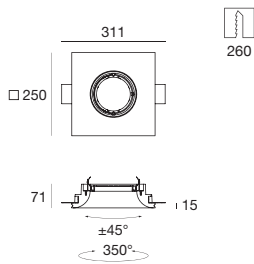


type

White **60843**

Suggested accessories




Gypsum_III2 | Downlights |

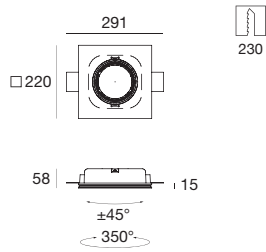


type

White **60844**

Suggested accessories




Gypsum_III3 | Downlights |

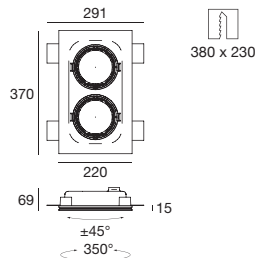


type

White **60845**

Suggested accessories



Illuminator_1 | Downlights | arrayLED 15 W 400 mA



type

White	CRI 95	97476
-------	--------	--------------

colour

3000 K	1414 lm	W
4000 K	1522 lm	N

optics

30°	30
60°	60

White	CRI 80	97482
-------	--------	--------------


3000 K	1875 lm	W
4000 K	2013 lm	N

30°	30
60°	60


Suggested electronics



99113
ON/OFF
1 art.



99116
1-10V/PUSH
1 art.



99131
DALI/PUSH
1 art.

Suggested accessories




98071
30° Optics



98072
60° Optics

Illuminator_2 | Downlights | arrayLED 25 W 720 mA



type

White	CRI 95	97485
-------	--------	--------------

colour

3000 K	2511 lm	W
4000 K	2695 lm	N

optics

30°	30
60°	60

White	CRI 80	97491
-------	--------	--------------


3000 K	3321 lm	W
4000 K	3568 lm	N

30°	30
60°	60


Suggested electronics



99112
ON/OFF
1 art.



99188
1-10V, DALI
PUSH
1 art.



99330
DALI/PUSH
1 art.

Suggested accessories




98071
30° Optics



98072
60° Optics

Illuminator_3 | Downlights | arrayLED 30 W 840 mA



type

White	CRI 95	91229
-------	--------	--------------

colour

3000 K	2839 lm	W
4000 K	3261 lm	N

optics

15°	15
30°	30
60°	60

White	CRI 80	91232
-------	--------	--------------


3000 K	3945 lm	W
4000 K	3945 lm	N

15°	15
30°	30
60°	60


Suggested electronics



99093
ON/OFF
1 art.



99187
1-10V, DALI
PUSH
1 art.



99330
DALI
1 art.

Suggested accessories



98507
15° Optics



98508
30° Optics



98509
60° Optics