

Quarter



L/N main®



The stylistic research along with lighting technology and know-how has led to the creation of a **square downlight featuring a direct universal design**. The exposed flange, minimalist and ultra-thin, combines elegance and discretion; the powerLED source illuminates the environments with a clean comfortable light.

Low-trim


The ultra-thin flange ensures a minimalist discreet design

Direct to the power


Directly connected to the mains voltage with no external drivers required

Diffused light distribution

Maximum visual comfort is ensured by the PMMA opaline diffuser

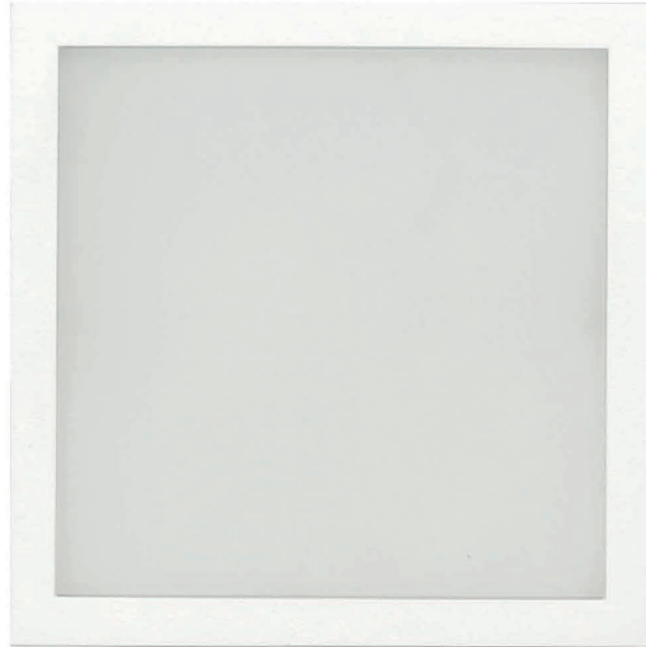

Quarter_HV | Downlight | topLED 5 W 190-240 V AC



type

White	CRI 80	97710
Black	CRI 80	97711
Grey	CRI 80	97712

colour

3000 K	570 lm	W
4000 K	610 lm	N

optic


Diff.	00
-------	-----------



KIT0027

Dimmer

Quarter_HV | Downlight | powerLEDs 10 W 190-240 V AC



type

White	CRI 80	97730
Black	CRI 80	97731
Grey	CRI 80	97732

colour

2700 K	915 lm	M
3000 K	980 lm	W
4000 K	1045 lm	N

optic

Diff.	00
-------	-----------



KIT0027

Dimmer

