



ACRO XS OPALED



● GR-RAL7035 / Grey RAL7035 / Matt

Weatherproof LED luminaire complete with diffuser, comprising:

- Housing made of fiberglass reinforced polyester
- Opal PMMA diffuser for optimal light diffusion and a high light uniformity
- Complete with PREVALED led and integrated driver
- Stainless steel retaining clips
- Quick ceiling fixing bracket (stainless steel)

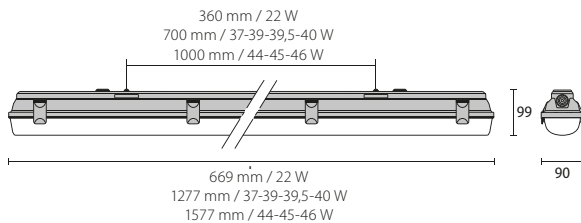

ACRO XS OPALED

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	45 W	I	80	4000	S/W	-	-	-	5250 lm	80	10	50000 h	●	15-00881
LED	39 W	I	80	4000	S/W	-	-	-	4214 lm	80	10	50000 h	●	15-00829
LED	22 W	I	80	4000	S/W	-	-	-	2403 lm	80	10	50000 h	●	15-00886
Power LED - dimmable DALI 220-240 V 50/60 Hz														
LED	46 W	I	80	4000	S/W	-	-	-	5250 lm	80	10	50000 h	●	15-00883
LED	40 W	I	80	4000	S/W	-	-	-	4500 lm	80	10	50000 h	●	15-00882



ACRO XS OPALED PC

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	39 W	I	80	4000	S/W	-	-	-	4500 lm	80	10	50000 h	●	15-00894
LED	39 W	I	80	4000	S/W	-	-	-	5250 lm	80	10	50000 h	●	15-00897
Power LED - dimmable DALI 220-240 V 50/60 Hz														
LED	46 W	I	80	4000	S/W	-	-	-	5250 lm	80	10	50000 h	●	15-00898
LED	40 W	I	80	4000	S/W	-	-	-	4500 lm	80	10	50000 h	●	15-00895
Power LED - Emergency 1P 220-240 V 50/60 Hz														
LED	42 W	I	80	4000	S/W	-	-	-	4251 lm	80	10	50000 h	●	15-00856
LED	37 W	I	80	4000	S/W	-	-	-	3800 lm	80	10	50000 h	●	15-00855

ACRO XS OPALED DETEK

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	45 W	I	80	4000	S/W	-	-	-	4683 lm	80	10	50000 h	●	15-00885
LED	39.5 W	I	80	4000	S/W	-	-	-	4500 lm	80	10	50000 h	●	15-00884

ACRO XS OPALED PC DETEK

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	45 W	I	80	4000	S/W	-	-	-	5250 lm	80	10	50000 h	●	15-00896
LED	39.5 W	I	80	4000	S/W	-	-	-	4500 lm	80	10	50000 h	●	15-00893


ACRO XS FORTILED



● GR-RAL7035 / Grey RAL7035 / Matt

Weatherproof LED luminaire complete with diffuser, comprising:

- Housing made of fiberglass reinforced polyester
- Opal PMMA diffuser for optimal light diffusion and a high light uniformity
- Complete with FORTIMOLED led and integrated driver
- Stainless steel antivandal clips
- Quick ceiling fixing bracket (stainless steel)

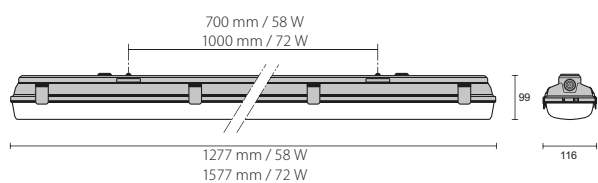

ACRO XS FORTILED

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	71 W	I		80	4000		S/W	-	-	9191 lm	80	10	40000 h	●	15-00891
LED	56 W	I		80	4000		S/W	-	-	7408 lm	80	10	40000 h	●	15-00890




ACRO XS CERTALED



● GR-RAL7035 / Grey RAL7035 / Matt

Weatherproof LED luminaire complete with diffuser, comprising:

- Housing made of fiberglass reinforced polyester
- Opal PMMA diffuser for optimal light diffusion and a high light uniformity
- Complete with CERTALED led and integrated driver
- Stainless steel antivandal clips
- Quick ceiling fixing bracket (stainless steel)

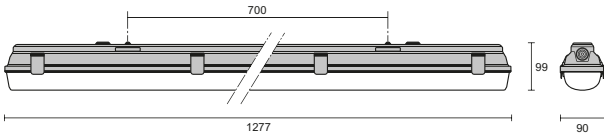


ACRO XS CERTALED

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	37 W	I	80	4000	S/W	-	-	3800 lm	80 10	35000 h	●			15-00907
LED	28 W	I	80	4000	S/W	-	-	2880 lm	80 10	35000 h	●			15-00879



ACRO XS




● GR-RAL7035 / Grey RAL7035 / Matt

Weatherproof luminaire for T5 and T8 lamps, with diffuser, comprising:

- Housing made of grey fiberglass reinforced polyester (resistant to acids, corrosion, and moisture)
- PMMA Diffuser with external smooth surface
- Injected polycarbonate diffuser (PC) with outer, smooth surface
- Reflector made of sheet steel painted white, twist lock fixing
- Stainless steel fixing clips, save T8/B2 version (standard clips)
- Quick ceiling fixing bracket (stainless steel)
- Dimmable 1-10 V ballast available upon request

Options:

- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request

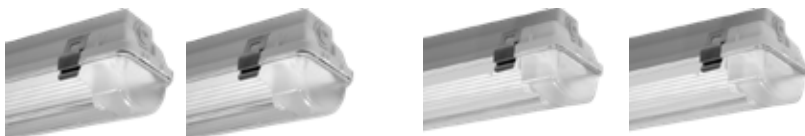

PMMA

PC

PMMA

PC



SS1-EEI = A2

EEI = B2

1x



2x



360 mm / 14-18-24 W
700 mm / 28-36-54 W
1000 mm / 35-49-58 W



669 mm / 14-18-24 W
1277 mm / 28-36-54 W
1577 mm / 35-49-58 W

360 mm / 14-18-24 W
700 mm / 28-36-54 W
1000 mm / 35-49-58 W



669 mm / 14-18-24 W
1277 mm / 28-36-54 W
1577 mm / 35-49-58 W

ACRO XS T5

IK02 0,20J xx0

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Fluorescent - rephased electronic ballast															
G5	2x54 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00747
G5	2x49 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00736
G5	2x35 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00746
G5	2x28 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00745
G5	2x24 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00744
G5	2x14 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00743
G5	1x54 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00742
G5	1x49 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00741
G5	1x35 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00740
G5	1x28 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00739
G5	1x24 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00738
G5	1x14 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00737



ACRO XS PC T5

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Fluorescent - rephased electronic ballast															
G5	2x54 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00759
G5	2x49 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00758
G5	2x35 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00757
G5	2x28 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00756
G5	2x24 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00755
G5	2x14 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00754
G5	1x54 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00753
G5	1x49 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00752
G5	1x35 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00751
G5	1x28 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00750
G5	1x24 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00749
G5	1x14 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00748

ACRO XS T8 HF

IK02 0,20J xx0

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Fluorescent - rephased electronic ballast															
G13	2x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00413
G13	2x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00412
G13	2x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00411
G13	1x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00410
G13	1x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00409
G13	1x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00408

ACRO XS PC T8 HF

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Fluorescent - rephased electronic ballast															
G13	2x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00431
G13	2x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00430
G13	2x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00429
G13	1x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00428
G13	1x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00427
G13	1x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00426


ACRO XS T8 DIM

IK02 0,20J xx0


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Fluorescent - dimmable 1-10 V 220-240 V 50/60 Hz															
G13	2x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00419
G13	2x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00418
G13	2x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00417
G13	1x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00416
G13	1x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00415
G13	1x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00414

OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
1x18 W		
Spare methacrylate plexiglas 1x18 W	○	90-04014
Spare polycarbonate plexiglas 1x18 W	○	90-04020
1x36 W		
Spare methacrylate plexiglas 1x36 W	○	90-04015
Spare polycarbonate plexiglas 1x36 W	○	90-04021
1x58 W		
Spare methacrylate plexiglas 1x58 W	○	90-04016
Spare polycarbonate plexiglas 1x58 W	○	90-04022
2x18 W		
Spare methacrylate plexiglas 2x18 W	○	90-04017
Spare polycarbonate plexiglas 2x18 W	○	90-04023
2x36 W		
Spare methacrylate plexiglas 2x36 W	○	90-04018
Spare polycarbonate plexiglas 2x36 W	○	90-04024
2x58 W		
Spare methacrylate plexiglas 2x58 W	○	90-04019
Spare polycarbonate plexiglas 2x58 W	○	90-04025
ACRO XS		
Spare clips (10)		90-04034
Attached stainless steel clips (10)	●	90-04037
Stainless steel bracket for quick ceiling mounting	●	15-00760



1x18/36/58 W
90-04014
90-04015
90-04016



1x18/36/58 W
90-04020
90-04021
90-04022




2x18/36/58 W
90-04017
90-04018
90-04019




2x18/36/58 W
90-04023
90-04024
90-04025



90-04034




SS1
90-04037



15-00760

ACRO

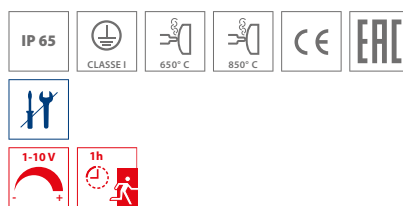


● GR-RAL7035 / Grey RAL7035 / Matt

Weatherproof fitting for T8 lamps with diffuser, including:

- Housing made of grey fiberglass-reinforced polyester with nine cable entrances
- PMMA Diffuser with external smooth surface
- Injected polycarbonate diffuser (PC) with outer, smooth surface
- Reflector made of sheet steel painted white, twist lock fixing
- Cover fixing clips made of techno-polymer (18 W: 6 - 36 W:8 - 58 W:10) which remain attached to the diffuser
- Emergency (1 hour maintained)


Options:

- Stainless steel retaining clips
- Dimmable DALI ballast available upon request

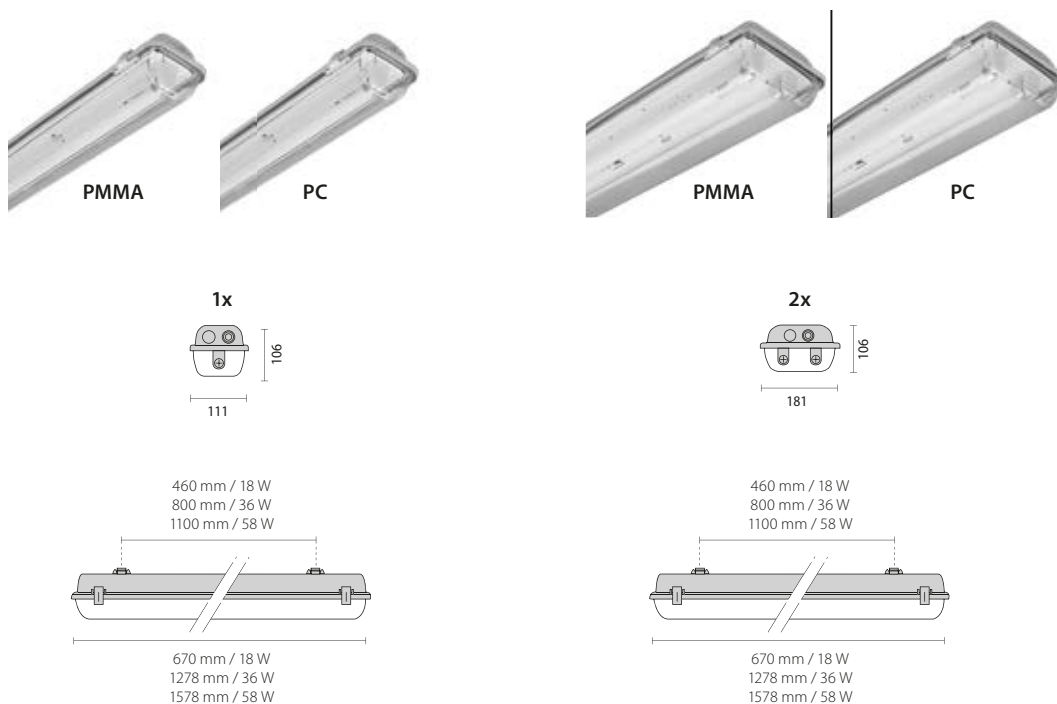

ACRO T8 HF


IK02 0,20J xx0

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Fluorescent - rephased electronic ballast															
G13	2x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00536
G13	2x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00535
G13	2x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00534
G13	1x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00533
G13	1x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00532
G13	1x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00531



ACRO PC T8 HF


IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Fluorescent - rephased electronic ballast															
G13	2x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00547
G13	2x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00545
G13	2x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00544
G13	1x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00543
G13	1x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00542
G13	1x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00541




ACRO T8 DIM

IK02 0,20J xx0

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Fluorescent - dimmable 1-10 V 220-240 V 50/60 Hz															
G13	2x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00553
G13	2x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00552
G13	2x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00551
G13	1x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00550
G13	1x36 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00549
G13	1x18 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00548

ACRO PC T8 EM

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Emergency - electronic ballast															
G13	2x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00925
G13	1x58 W	I		-	-	•	S/W	-	-	-	-	-	-	●	15-00922



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
ACRO		
Attached stainless steel clips (10)	●	15-00561
1x18 W		
Spare methacrylate plexiglas 1x18 W	●	90-01761
Spare polycarbonate plexiglas 1x18 W	○	90-01767
1x36 W		
Spare methacrylate plexiglas 1x36 W	●	90-01762
Spare polycarbonate plexiglas 1x36 W	○	90-01768
1x58 W		
Spare methacrylate plexiglas 1x58 W	●	90-01763
Spare polycarbonate plexiglas 1x58 W	○	90-01769
2x18 W		
Spare methacrylate plexiglas 2x18 W	●	90-01764
Spare polycarbonate plexiglas 2x18 W	○	90-01770
2x36 W		
Spare methacrylate plexiglas 2x36 W	●	90-01765
Spare polycarbonate plexiglas 2x36 W	○	90-01771
2x58 W		
Spare methacrylate plexiglas 2x58 W	●	90-01766
Spare polycarbonate plexiglas 2x58 W	○	90-01772



SS1
15-00561



PMMA
1x18/36/58 W
90-01761
90-01762
90-01763



PC
1x18/36/58 W
90-01767
90-01768
90-01769



PMMA
2x18/36/58 W
90-01764
90-01765
90-01766



PC
2x18/36/58 W
90-01770
90-01771
90-01772