





ARAGON (LED)

WEATHER-PROOF
LUMINAIRES
OF POLYCARBONATE

CLASSIC DESIGN WITH INTELLIGENT LED TECHNOLOGY



- Especially suitable for refurbishments thanks to fixing and dimensions identical to conventional versions.
- Service life of 50,000 hours and efficiency of 100lm/W reduces operating overheads by more than 50 %.
- Sensor versions save additional energy costs because they provide light only to the intensity and time needed.



Quick, low-cost installation





Weather-proof surface-mounted luminaires (LED), polycarbonate



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
• Aragon 1200 LED 2300-840...	63 328...	...51	...40	2300 lm	A++/A+/A	23	3.3
Aragon 1200 LED 4000-840...	63 329...	...51	...40	4000 lm	A++/A+/A	40	3.3
Aragon 1500 LED 3400-840...	63 326...	...51	...40	3500 lm	A++/A+/A	35	3.7
Aragon 1500 LED 3400-840...+HFS	63 330...	...51	...40	3500 lm	A++/A+/A	35	3.8
Aragon 1500 LED 6000-840...	63 327...	...51	...40	5600 lm	A++/A+/A	56	3.7
Aragon 1500 LED 6000-840...+HFS	63 331...	...51	...40	5600 lm	A++/A+/A	56	3.8

• IK08/6 J 850 °C



Weather-proof surface-mounted luminaires (T5), polycarbonate

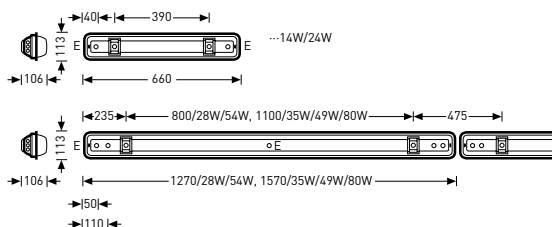

Reference	TOC	...E		EEC	=kg
• Aragon 114/24...	15 507...	...04	1 x 14/24	A+/A/B	1.7
Aragon 128/54...	15 512...	...04	1 x 28/54	A+/A/B/C	2.6
Aragon 135/49/80...	15 516...	...04	1 x 35/49/80	A+/A/B/C	2.9
Aragon 114/24 T...	42 950...	...04	1 x 14/24	A+/A/B	1.6
Aragon 128/54 T...	42 951...	...04	1 x 28/54	A+/A/B/C	2.4
Aragon 135/49/80 T...	42 952...	...04	1 x 35/49/80	A+/A/B/C	2.7

• IK08/6 J 850 °C

Weather-proof surface-mounted luminaires (T5), polycarbonate

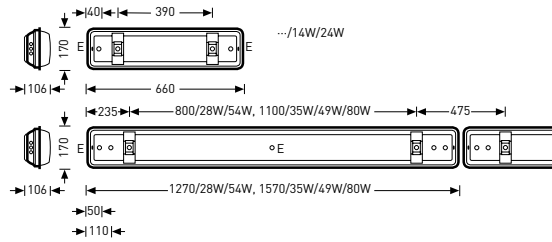

Reference	TOC	...E		EEC	≈kg
• Aragon 214/24...	51 515...	...04	2 x 14/24	A+/A/B	2.3
Aragon 228...	15 529...	...04	2 x 28	A+/A/B	3.6
Aragon 235...	15 530...	...04	2 x 35	A+/A/B	4.0
Aragon 249...	16 493...	...04	2 x 49	A+/A/B	4.0
Aragon 254...	15 533...	...04	2 x 54	A+/A/B/C	3.6
Aragon 280...	59 982...	...04	2 x 80	A+/A/B/C	4.0
Aragon 128/54 S...	15 513...	...04	1 x 28/54	A+/A/B/C	3.2
Aragon 135/49/80 S...	15 517...	...04	1 x 35/49/80	A+/A/B/C	3.5
Aragon 280 S...	59 984...	...04	2 x 80	A+/A/B/C	4.3
Aragon 214/24 T...	51 517...	...04	2 x 14/24	A+/A/B	2.5
Aragon 228 T...	38 748...	...04	2 x 28	A+/A/B	3.4
Aragon 235 T...	38 749...	...04	2 x 35	A+/A/B	3.8
Aragon 249 T...	38 750...	...04	2 x 49	A+/A/B	3.8
Aragon 254 T...	38 751...	...04	2 x 54	A+/A/B/C	3.4
Aragon 280 T...	59 983...	...04	2 x 80	A+/A/B/C	3.8

• IK08/6 J 850 °C

Inner wiring & through-wiring



Reference	TOC	Accessory description	≈kg
Aragon LV 5x1200	38 716 00	Inner wiring, 5 x 1.5 mm ² for 28 W and 54 W luminaires.	0.2
Aragon LV 5x1500	16 495 00	Inner wiring, 5 x 1.5 mm ² for 35 W, 49 W, 58 W, 80 W luminaires.	0.2
Aragon ZLV 5x1200 LED	64 356 00	5 x 1.5 mm ² through-wiring. For Aragon LED 1200.	0.2
Aragon ZLV 5x1500 LED	64 357 00	5 x 1.5 mm ² through-wiring. For Aragon LED 1500.	0.2

Steel strip suspensions

Reference	TOC	Accessory description	≈kg
Aragon SB	15 537 00	Steel strip suspension, length 1 m, of stainless steel (1 pair)	0.1