





DOCUS

CEILING SURFACE



p. 335



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.63kg IP20 36°

CODE	
	146364W
	146364L
	146364G
	146364P
	146364B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	600	>80	2
3000K	600	>80	4
1800-2850K	410	>95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.55kg IP20

CODE	
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 577

OPTIONAL

single inner cover max. 10W



CODE	
	911021W1
	911021G1
	911021B1





DOCUS

CEILING SURFACE



2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.92kg IP20 \pm 0.3° \pm 36°

Color	CODE
White	146464W
Grey	146464L
Gold	146464G
Red	146464P
Black	146464B

Light Colour Selection

Temperature	LUMEN CRI	CODE
2700K	2x600 >80	2
3000K	2x600 >80	4
1800-2850K	2x410 >95	9

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.01kg IP20 \pm 0.9°

Color	CODE
White	146420W0
Grey	146420L0
Gold	146420G0
Red	146420P0
Black	146420B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

Temperature	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 577

OPTIONAL

single inner cover max. 10W
2 pieces needed



Color	CODE
White	911021W1
Grey	911021G1
Black	911021B1





DOCUS

CEILING SUSPENDED

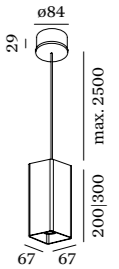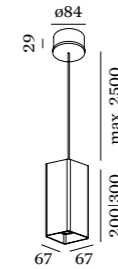

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.69 | 0.85kg IP20 $\pm 0.3^\circ$ $\Delta 36^\circ$

2.0

200mm

CODE

	207564W
	207564L
	207564G
	207564P
	207564B

3.0

300mm

CODE

	207664W
	207664L
	207664G
	207664P
	207664B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9

2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62 | 0.75kg IP20 $\pm 0.9^\circ$

2.0

200mm

CODE

	207520W0
	207520L0
	207520G0
	207520P0
	207520B0

3.0

300mm

CODE

	207620W0
	207620L0
	207620G0
	207620P0
	207620B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 577






p. 261



back

DOCUS MULTI

CEILING SUSPENDED

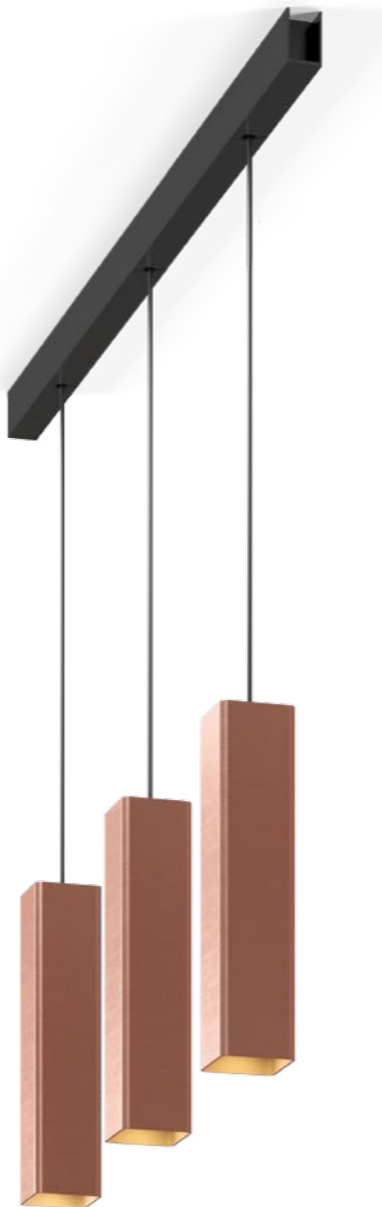

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | one hook included

0.69kg IP20 $\pm 0.3^\circ$ $\pm 36^\circ$

2.0

200mm	CODE
	227564W
	227564L
	227564G
	227564P
	227564B

3.0

300mm	CODE
	227664W
	227664L
	227664G
	227664P
	227664B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9

2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | one hook included

0.62kg IP20 $\pm 0.9^\circ$

2.0

200mm	CODE
	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0

300mm	CODE
	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 577

ALWAYS USE

Multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

Extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

Multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more information and options on
page 591