


# IKE/LED


design by SILVIA PAOLA PENNACCHIO

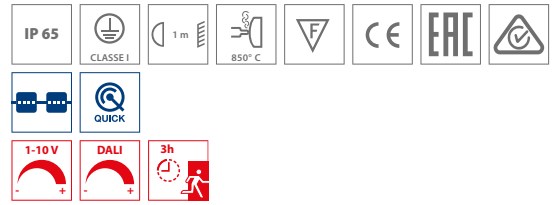

● GR-RAL7035 / Grey RAL7035 / Matt

Weatherproof LED luminaire complete with diffuser, comprising:

- Polycarbonate housing
- UV stabilised transparent polycarbonate diffuser
- Reflector made of white (UV-resistant) painted steel sheet used also as electrical component tray
- Polyurethane foam gasket
- Electrical connection with outdoor rated plug & socket quick connector (IP66) that allows connection to mains without opening the luminaire. Made in PA66 with silver-plated brass contacts, for cables Ø 9 - Ø 12 mm
- Light beam obtained by the combination of multiple LED modules
- Clip in technopolymer reinforced with fibreglass
- Stainless steel springs for quick ceiling mount
- IKE/LED EM versions come with a built-in, 3-hour emergency battery pack. Suitable for both general as well as emergency lighting
- Self-extinguishing V2-UL94 housing and diffuser, glow wire 850 °C
- 3000 K and 5700 K available upon request
- The IKE/LED FC versions are complete with through wiring for continuous line installation

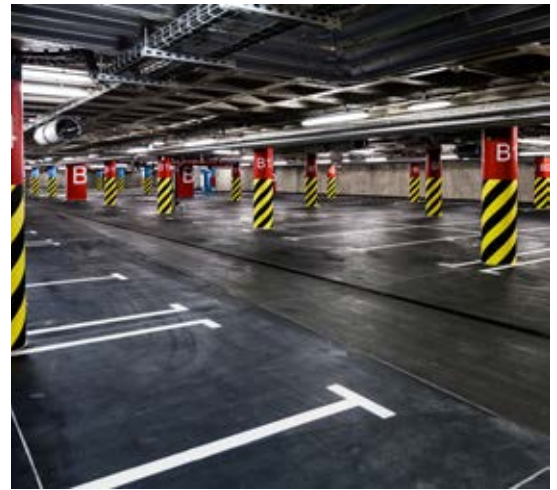

IKE LED  
15 W




IKE LED  
42 W




IKE LED  
56 W

330 mm / 15 W  
800 mm / 42 W  
860 mm / 56 W

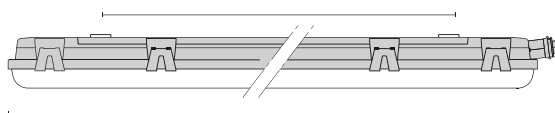

675 mm / 15 W  
1285 mm / 42 W  
1585 mm / 56 W



## IKE/LED S/EW

IK09 12J xx7

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>														
LED	56 W	I	80	4000	•	S/EW	-	7656 lm	5874 lm	80	10	60000 h	●	<b>06159890</b>
LED	42 W	I	80	4000	•	S/EW	-	5742 lm	4401 lm	80	10	60000 h	●	<b>06161090</b>
LED	15 W	I	80	4000	•	S/EW	-	1914 lm	1466 lm	80	10	60000 h	●	<b>06162290</b>



### Power LED dimmable 1-10 V 220-240 V 50/60 Hz

LED	56 W	I	80	4000	•	S/EW	-	7656 lm	5874 lm	80	10	60000 h	●	<b>06160490</b>
LED	42 W	I	80	4000	•	S/EW	-	5742 lm	4401 lm	80	10	60000 h	●	<b>06161690</b>
LED	15 W	I	80	4000	•	S/EW	-	1914 lm	1466 lm	80	10	60000 h	●	<b>06162590</b>

### Power LED - dimmable DALI 220-240 V 50/60 Hz

LED	56 W	I	80	4000	•	S/EW	-	7656 lm	5874 lm	80	10	60000 h	●	<b>06160790</b>
LED	42 W	I	80	4000	•	S/EW	-	5742 lm	4401 lm	80	10	60000 h	●	<b>06161990</b>
LED	15 W	I	80	4000	•	S/EW	-	1914 lm	1466 lm	80	10	60000 h	●	<b>06162890</b>

## IKE/LED FC S/EW

IK09 12J xx7

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>														
LED	56 W	I	80	4000	•	S/EW	-	7656 lm	5874 lm	80	10	60000 h	●	<b>06164790</b>
LED	42 W	I	80	4000	•	S/EW	-	5742 lm	4401 lm	80	10	60000 h	●	<b>06165090</b>
LED	15 W	I	80	4000	•	S/EW	-	1914 lm	1466 lm	80	10	60000 h	●	<b>06165390</b>

## IKE/LED EM S/EW

IK09 12J xx7

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED - Emergency 220-240 V 50/60 Hz</b>														
LED	56 W	I	80	4000	•	S/EW	-	7656 lm	5874 lm	80	10	60000 h	●	<b>06160190</b>
LED	42 W	I	80	4000	•	S/EW	-	5742 lm	4401 lm	80	10	60000 h	●	<b>06161390</b>

## OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
<b>IKE - 1285 mm</b>		
Galvanized steel protection grills, to be fixed on ceiling.		<b>14430995</b>
<b>IKE - 1585 mm</b>		
Galvanized steel protection grills, to be fixed on ceiling.		<b>14431995</b>



**14430995**  
**14431995**

