

# Suelo



This drive-over uplight, offering directional and non-directional emissions, is available in several versions with many different finishes, optics and shapes and features **high energy efficiency** and **maximum external protection**. Suelo is...visual comfort, performance and the reliability of the Aqua-Stop system.

**Passive heat dissipation**  
Aluminium dissipating casing

**Light management**  
Protective shade with black silk-screened pattern along the edge for glare reduction

**Sturdy appearance**  
Sturdy flange available in three different material and finish versions

Suelo\_R




	body	driver	power	size	optics	page		
<b>Suelo_R</b>	Aluminium		8 W	Ø 120 mm	30° - 50° - 60° - Asymmetric	568		
			.....					571
			8 W 13 W 25 W	Ø 120 mm Ø 200 mm Ø 290 mm	30° - 50° - 60° - Asymmetric 5° - 15° - 30° - 60° - Diffused - Asymmetric 15° - 30° - 60° - Diffused - Asymmetric	573		
<b>Suelo_RJ</b>	Aluminium		8 W	Ø 120 mm	15° - 30° - 60°	568		
			.....					571
			8 W 13 W 25 W	Ø 120 mm Ø 200 mm Ø 290 mm	15° - 30° - 60°	572		
<b>Suelo_RI</b>	Steel flange		13 W 20 W	Ø 180 mm Ø 304 mm	15° - 30° - 60° - Diffused - Asymmetric	570		
			.....					571
<b>Suelo_RJI</b>	Steel flange		13 W 20 W	Ø 180 mm Ø 304 mm	15° - 30° - 60°	572		

Suelo\_Q



	body	driver	power	size	optics	page		
<b>Suelo_Q</b>	Aluminium		3 W 6 W	Ø 70 mm Ø 120 mm	30° - 50° - 70° - Diffused 10° - 30° - 50° - 120° - Diffused	592		
			.....					593
			4.5 W	Ø 120 mm	10° - 30° - 50° - 120° - Diffused			
<b>Suelo_QJ</b>	Aluminium		6 W	Ø 120 mm	10° - 30° - 50° - 120°	592		
			.....					593
			6 W	Ø 120 mm		594		
<b>Suelo_QI</b>	AISI 316L		3 W	Ø 70 mm	30° - 50° - 70° - Diffused	592		
			.....					593
			6 W	Ø 120 mm	10° - 30° - 50° - 120° - Diffused			
<b>Suelo_QJI</b>	AISI 316L		6 W	Ø 120 mm	10° - 30° - 50° - 120°	593		
			.....					594
			6 W	Ø 120 mm				

Suelo\_R | Drive-over spotlight | powerLED 8 W 630 mA



type		colour		optic	
Grey	CRI 80 <b>93997</b>	2700 K	639 lm	<b>M</b>	15° <b>15</b>
Chrome	CRI 80 <b>93996</b>	3000 K	674 lm	<b>W</b>	30° <b>30</b>
Steel	CRI 80 <b>93998</b>	4000 K	745 lm	<b>N</b>	60° <b>60</b>
					Asym. <b>07</b>



**99179**  
ON/OFF  
1 art.




**99186**  
ON/OFF  
2 - 3 art.



**98121**  
Outer casing

Suelo\_RJ | Drive-over spotlight | powerLED 8 W 630 mA



type		colour		optic	
Grey	CRI 80 <b>93957</b>	2700 K	639 lm	<b>M</b>	15° <b>15</b>
Chrome	CRI 80 <b>93956</b>	3000 K	674 lm	<b>W</b>	30° <b>30</b>
Steel	CRI 80 <b>93958</b>	4000 K	745 lm	<b>N</b>	60° <b>60</b>



**99179**  
ON/OFF  
1 art.





**99186**  
ON/OFF  
2 - 3 art.



**98121**  
Outer casing



**Suelo\_R** | Drive-over spotlight | 190-250 V | powerLED 8 W 630 mA





type		colour			optic	
Grey	CRI 80	<b>94003</b>	2700 K	639 lm	<b>M</b>	15° <b>15</b>
Chrome	CRI 80	<b>94002</b>	3000 K	674 lm	<b>W</b>	30° <b>30</b>
Steel	CRI 80	<b>94004</b>	4000 K	745 lm	<b>N</b>	60° <b>60</b>



**98122**  
Outer casing

**Suelo\_R** | Drive-over spotlight | 180-300 V | powerLED 13 W 350 mA

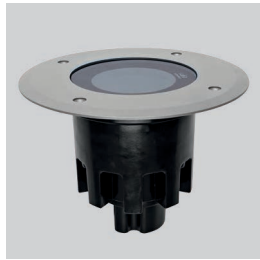


type		colour			optic	
Grey	CRI 80	<b>96085</b>	2700 K	1298 lm	<b>M</b>	15° <b>15</b>
			3000 K	1400 lm	<b>W</b>	30° <b>30</b>
			4000 K	1497 lm	<b>N</b>	60° <b>60</b>
						Diff. <b>00</b>



**84933**  
Outer casing

**Suelo\_RI** | Drive-over spotlight | 180-300 V | powerLED 13 W 350 mA




type		colour			optic	
Steel	CRI 80	<b>96083</b>	2700 K	1298 lm	<b>M</b>	15° <b>15</b>
			3000 K	1400 lm	<b>W</b>	30° <b>30</b>
			4000 K	1497 lm	<b>N</b>	60° <b>60</b>
						Diff. <b>00</b>



**84933**  
Outer casing


**Suelo\_R** | Walk-over spotlight | 180-300 V | arrayLED 13 W 350 mA



type		colour			optic	
Grey	CRI 80	<b>95799</b>	2700 K	1572 lm	<b>M</b>	Asym. <b>07</b>
			3000 K	1682 lm	<b>W</b>	
			4000 K	1806 lm	<b>N</b>	




**84932**  
Outer casing

**Suelo\_RI** | Walk-over spotlight | 180-300 V | arrayLED 13 W 350 mA**type**Steel CRI 80 **95779****colour**

2700 K	1572 lm	<b>M</b>
3000 K	1682 lm	<b>W</b>
4000 K	1806 lm	<b>N</b>

**optic**Asym. **07****84932**

Outer casing

**Suelo\_RI** | Drive-over spotlight | 180-300 V | arrayLED 20 W 580 mA**type**Steel CRI 80 **96917****colour**


2700 K	2546 lm	<b>M</b>
3000 K	2726 lm	<b>W</b>
4000 K	2929 lm	<b>N</b>

**optic**

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>
Asym.	<b>07</b>
Diff.	<b>00</b>

**98353**

Outer casing

**Suelo\_R** | Drive-over spotlight | 180-300 V | arrayLED 25 W 720 mA**type**Grey CRI 80 **96087****colour**



2700 K	3101 lm	<b>M</b>
3000 K	3321 lm	<b>W</b>
4000 K	3568 lm	<b>N</b>

**optic**

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>
Asym.	<b>07</b>
Diff.	<b>00</b>

**98353**

Outer casing

**Suelo\_RJ** | Drive-over spotlight | 190-250 V | powerLED 8 W 630 mA**type**Grey CRI 80 **93963**Chrome CRI 80 **93962**Steel CRI 80 **93964****colour**

2700 K	639 lm	<b>M</b>
3000 K	674 lm	<b>W</b>
4000 K	745 lm	<b>N</b>


**optic**

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

**98122**

Outer casing

**Suelo\_RJ** | Drive-over spotlight | 180-300 V | powerLED 13 W 350 mA



**type**

Grey CRI 80 **96086**

**colour**

2700 K	1298 lm	<b>M</b>
3000 K	1400 lm	<b>W</b>
4000 K	1497 lm	<b>N</b>

**optic**


15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>



**84932**

Outer casing

**Suelo\_RJ** | Drive-over spotlight | 180-300 V | powerLED 13 W 350 mA



**type**

Steel CRI 80 **96084**

**colour**

2700 K	1298 lm	<b>M</b>
3000 K	1400 lm	<b>W</b>
4000 K	1497 lm	<b>N</b>

**optic**



15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>



**84932**

Outer casing

**Suelo\_RJ** | Drive-over spotlight | 180-300 V | arrayLED 25 W 720 mA



**type**

Grey CRI 80 **96088**

**colour**

2700 K	3101 lm	<b>M</b>
3000 K	3321 lm	<b>W</b>
4000 K	3568 lm	<b>N</b>

**optic**


15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>



**98353**

Outer casing

**Suelo\_RJ** | Drive-over spotlight | 180-300 V | arrayLED 20 W 580 mA

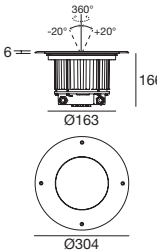

**type**

Steel CRI 80 **96918**

**colour**

2700 K	2546 lm	<b>M</b>
3000 K	2726 lm	<b>W</b>
4000 K	2929 lm	<b>N</b>

**optic**


15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>



**98353**

Outer casing

Suelo\_R | Drive-over spotlight | 180-300 V | powerLED 13 W 350 mA

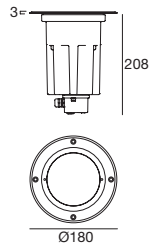

#### type

Steel CRI 80 **97366**

#### colour

2700 K	1298 lm	<b>M</b>
3000 K	1400 lm	<b>W</b>
4000 K	1497 lm	<b>N</b>

#### optic


5° **05**



**84932**


Outer casing

The innovative narrow optics, slightly tapered, was especially designed to illuminate columns and tall plants.

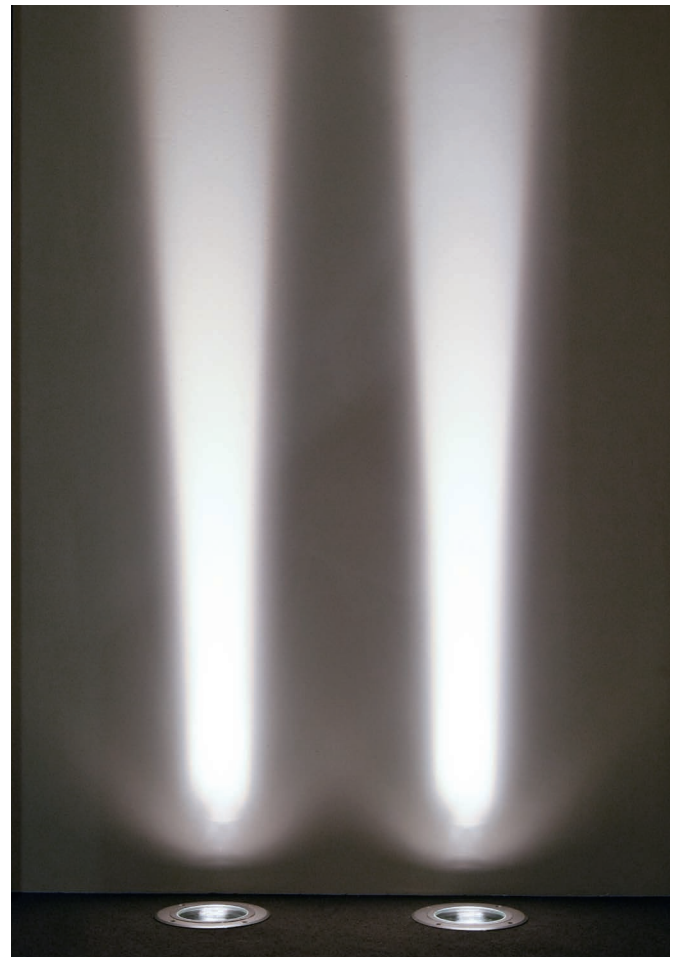



**Suelo\_RJI** | Drive-over spotlight | 180-300 V | powerLEDs 8 W 630 mA

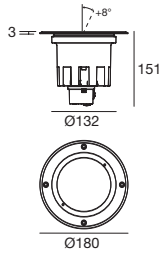

**type**

Steel CRI 80 **91436**

**colour**

2700 K	780 lm	<b>M</b>
3000 K	832 lm	<b>W</b>
4000 K	888 lm	<b>N</b>

**optic**


3° **03**



**84933**

Outer casing

**Suelo\_RJI** | Drive-over spotlight | 180-300 V | powerLED 12 W 630 mA

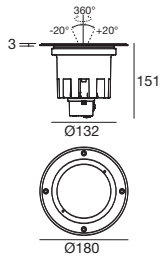

**type**

Steel CRI 80 **91437**

**colour**

2700 K	1170 lm	<b>M</b>
3000 K	1248 lm	<b>W</b>
4000 K	1332 lm	<b>N</b>

**optic**


8° **08**



**84933**

Outer casing

**Suelo\_RJI** | Drive-over spotlight | 180-300 V | powerLEDs 18 W 500 mA

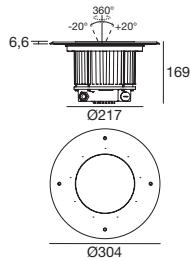

**type**

Steel CRI 80 **91434**

**colour**

2700 K	2004 lm	<b>M</b>
3000 K	2136 lm	<b>W</b>
4000 K	2280 lm	<b>N</b>

**optic**


8° **08**



**98353**

Outer casing

## Suelo\_Q | Drive-over spotlight | powerLED 8 W 630 mA



## type

Grey	CRI 80	<b>94000</b>
Chrome	CRI 80	<b>93999</b>
Steel	CRI 80	<b>94001</b>

## colour

2700 K	639 lm	<b>M</b>
3000 K	674 lm	<b>W</b>
4000 K	745 lm	<b>N</b>

## optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>
Asym.	<b>07</b>



99179

ON/OFF  
1 art.


99186

ON/OFF  
2 - 3 art.

98121

Outer casing

## Suelo\_QJ | Drive-over spotlight | powerLED 8 W 630 mA



## type

Grey	CRI 80	<b>93960</b>
Chrome	CRI 80	<b>93959</b>
Steel	CRI 80	<b>93961</b>

## colour

2700 K	639 lm	<b>M</b>
3000 K	674 lm	<b>W</b>
4000 K	745 lm	<b>N</b>

## optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>



99179

ON/OFF  
1 art.


99186

ON/OFF  
2 - 3 art.

98121

Outer casing

## Suelo\_Q | Drive-over spotlight | 190-250 V | powerLED 8 W 630 mA



## type

Grey	CRI 80	<b>94006</b>
Chrome	CRI 80	<b>94005</b>
Steel	CRI 80	<b>94007</b>

## colour

2700 K	639 lm	<b>M</b>
3000 K	674 lm	<b>W</b>
4000 K	745 lm	<b>N</b>

## optic



15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>



98122

Outer casing

## Suelo\_QJ | Drive-over spotlight | 190-250 V | powerLED 8 W 630 mA



## type

Grey	CRI 80	<b>93966</b>
Chrome	CRI 80	<b>93965</b>
Steel	CRI 80	<b>93967</b>

## colour

2700 K	639 lm	<b>M</b>
3000 K	674 lm	<b>W</b>
4000 K	745 lm	<b>N</b>

## optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>



98122

Outer casing

Suelo | In-ground outer-casing



type	Ø mm	h. mm	suitable for
PVC	170	240	Suelo_R 13 W optics 07 <b>84932</b>

Suelo | In-ground outer-casing



type	Ø mm	h. mm	suitable for
PVC	170	155	Suelo_R 13 W optics 15, 30, 60, 00 <b>84933</b> Suelo_RJ 13 W

Suelo | In-ground outer-casing



type	Ø mm	h. mm	suitable for
PVC	270	260	Suelo_R 30 W <b>98353</b> Suelo_RJ 30 W

Suelo | In-ground outer-casing



type	Ø mm	h. mm	suitable for
PVC	140	140	Suelo (no driver) <b>98121</b>

Suelo | In-ground outer-casing



type	Ø mm	h. mm	suitable for
PVC	110	220	Suelo (with driver) <b>98122</b>

