

- Adjustable projector for installation on ceiling, wall or floor.
- Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content) and AISI 316L fixing plate. Glass diffuser: extra clear with silkscreen border, fixed to the aluminium through a robotic gluing system. The wiring unit and the emitting unit are connected by an adjustable junction.
- Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65
- In compliance with EN60598-1 standards
- Class of insulation: I
- Installation: the luminaire is for direct connection to 220-230V with a LED module set to work directly connected to the mains. The luminaire is equipped with an AISI316L stainless steel fixing plate for installation on surface and IP68 connector (6\times8mm cable). Ground spike available on request.
- During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating. Damages on the coating exposed to outdoor conditions or water, could cause corrosion. Chemical substances affect the anticorrosion covering protection.

EU Regulation 874/2012 - Illumination equipment energy classes



LED VERSION:
Class A/A+/A++
Luminaire supplied
with integrated LED modules
that cannot be replaced



.1 White



.6 Grey



.3 Anthracite



.4 Black



.18 Deep Brown



Floor installation



Wall fitting



Ceiling fitting





Protection against
impact
IK 06 - 1,00 joule

Kirk70 - Adjustable - 50° - Direct 230V

Light Source: CoB LED / 4,5W / Total power 6W / CRI>80 / 220÷240V



540001.A
 White 3000K
 Lm LED 350 ≈ Im OUTPUT 244
 LED module set up to work
 directly connected to the mains

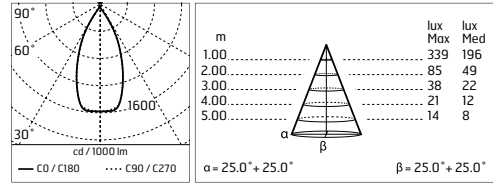



IP65

Kirk90 - Adjustable - 30° - Direct 230V

Light Source: CoB LED / 10W / Total power 12W / CRI >80 / 220÷240V



540002
 White 3000K
 Lm LED 951 ≈ Im OUTPUT 713
 LED module set up to work
 directly connected to the mains

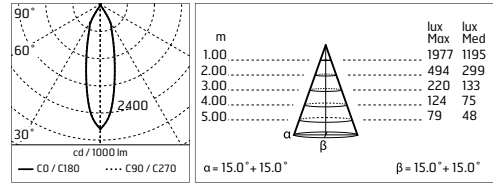



IP65

Kirk120 - Adjustable - 40° - Direct 230V

Light Source: CoB LED / 22W / Total power 24W / CRI >80 / 220÷240V



540003
 White 3000K
 Lm LED 2303 ≈ Im OUTPUT 1610
 LED module set up to work
 directly connected to the mains

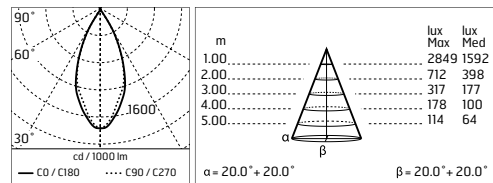


IP65






Accessories: Kirk


264
GROUND SPIKE - Ø 70mm




266
GROUND SPIKE - Ø 90mm



268
GROUND SPIKE - Ø 130mm



237
SPD: (SURGE PROTECTION DEVICE)
275Vac
MAXIMUM DISCHARGE CURRENT 10KA
(8/20µs)
MAXIMUM OPERATING CURRENT 5A
SUITABLE FOR SERIES CONNECTION
- IP66



acc. code ▶	264	266	268	237
540001.A	•			•
540002		•		•
540003			•	•