



Dual Out

Wall mounted fixture with single or dual light emission, available with concentrating lens for a more scenographic lighting. Available with LED Array source for open beams or PowerLED for narrow beams. Integrated electronic power supply. Aluminum case minimal design, suitable for terraces and covered paths.

- + **direct and indirect light**
- + **LED source**
- + **minimal design**

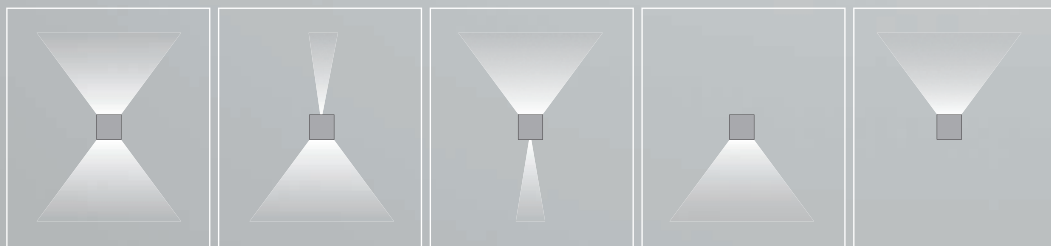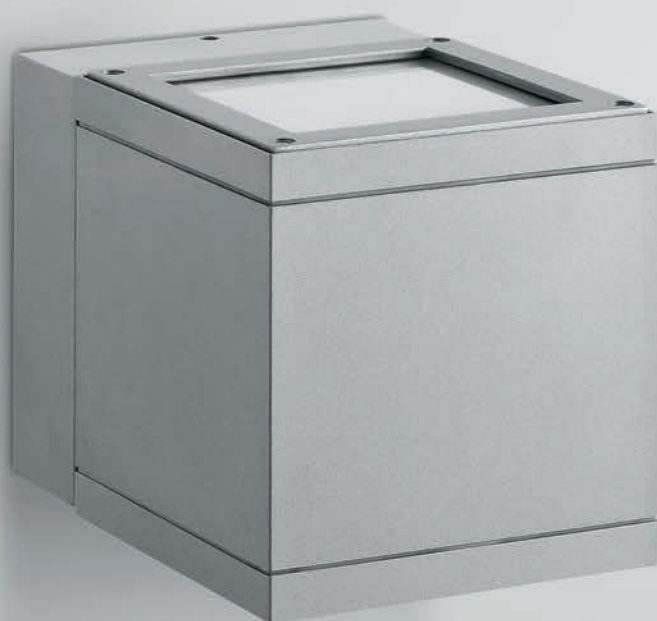

Dual Out_W1 | Wall Lights | 220-240 V | arrayLED 9,5 W 250 mA




| type | | colour | | optics | |
|------|---------------------|--------|---------|----------|---------------|
| Grey | CRI 80 59385 | 3000 K | 1131 lm | W | 60° 60 |
| | | 4000 K | 1214 lm | N | |

| type | | colour | | optics | |
|---------|---------------------|--------|---------|----------|---------------|
| Cor-Ten | CRI 80 59386 | 3000 K | 1131 lm | W | 60° 60 |
| | | 4000 K | 1214 lm | N | |



Dual Out_W2 | Wall Lights | 220-240 V | arrayLED 19 W 500 mA




| type | | colour | | optics | |
|------|---------------------|--------|---------|----------|---------------|
| Grey | CRI 80 59365 | 3000 K | 2262 lm | W | 60° 60 |
| | | 4000 K | 2428 lm | N | |

| type | | colour | | optics | |
|---------|---------------------|--------|---------|----------|---------------|
| Cor-Ten | CRI 80 59366 | 3000 K | 2262 lm | W | 60° 60 |
| | | 4000 K | 2428 lm | N | |



Dual Out_W3 | Wall Lights | 100-240 V | PowerLed 4W 700mA UP+ arrayLED 9,5W 250mA DOWN



| type | | colour | | optics | |
|------|---------------------|--------|---------|----------|--------------------|
| Grey | CRI 80 59375 | 3000 K | 1331 lm | W | 3° + 60° 36 |
| | | 4000 K | 1414 lm | N | |

| type | | colour | | optics | |
|---------|---------------------|--------|---------|----------|--------------------|
| Cor-Ten | CRI 80 59376 | 3000 K | 1331 lm | W | 3° + 60° 36 |
| | | 4000 K | 1414 lm | N | |

