

# Elix




A single emission wall light with a **streamlined design**, available in a rectangular or cylindrical shape. In addition to a wide range of finishes and optics, Elix features up to four different light powers that provide **specific illuminance levels** and satisfy the most diverse requirements. Also available with RGB LED.

**Passive heat dissipation**  
Anodised aluminium casing

**Light management**  
Three optics available ensuring maximum design flexibility



Elix\_R | Wall light | 190-250 V | powerLED 2 W 630 mA



type

Grey	CRI 80	<b>97511</b>
Cor-Ten	CRI 80	<b>97512</b>

colour


3000 K	208 lm	<b>W</b>
4000 K	222 lm	<b>N</b>
5000 K	253 lm	<b>C</b>

R - G - B - Y on request

optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

Elix\_R | Wall light | 190-250 V | powerLED 4 W 630 mA



type

Grey	CRI 80	<b>97527</b>
Cor-Ten	CRI 80	<b>97528</b>

colour


3000 K	416 lm	<b>W</b>
4000 K	444 lm	<b>N</b>
5000 K	506 lm	<b>C</b>

R - G - B - Y on request

optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

Elix\_R | Wall light | 180-300 V | powerLED 6 W 630 mA



type

Grey	CRI 80	<b>97515</b>
Cor-Ten	CRI 80	<b>97516</b>

colour


3000 K	624 lm	<b>W</b>
4000 K	666 lm	<b>N</b>
5000 K	759 lm	<b>C</b>

R - G - B - Y on request

optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

Elix\_R | Wall light | 180-300 V | powerLED 12 W 630 mA



type

Grey	CRI 80	<b>97531</b>
Cor-Ten	CRI 80	<b>97532</b>

colour


3000 K	1248 lm	<b>W</b>
4000 K	1332 lm	<b>N</b>
5000 K	1518 lm	<b>C</b>

R - G - B - Y on request

optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

Elix\_R | Wall light | 180-300 V | powerLED 12 W 630 mA



## type

Grey	CRI 80	<b>97519</b>
Cor-Ten	CRI 80	<b>97520</b>

## colour

3000 K	1248 lm	<b>W</b>
4000 K	1332 lm	<b>N</b>
5000 K	1518 lm	<b>C</b>

R - G - B - Y on request


## optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>




## "Almar Hotel" - Jesolo (Italy)

The soft light beams of Elix wall lights enhance the characteristic brickwork walls of the Hotel Almar in Jesolo, emphasising relief shapes and enveloping the building in an evocative atmosphere. Light gives new life to a wealth of details that deserve attention.

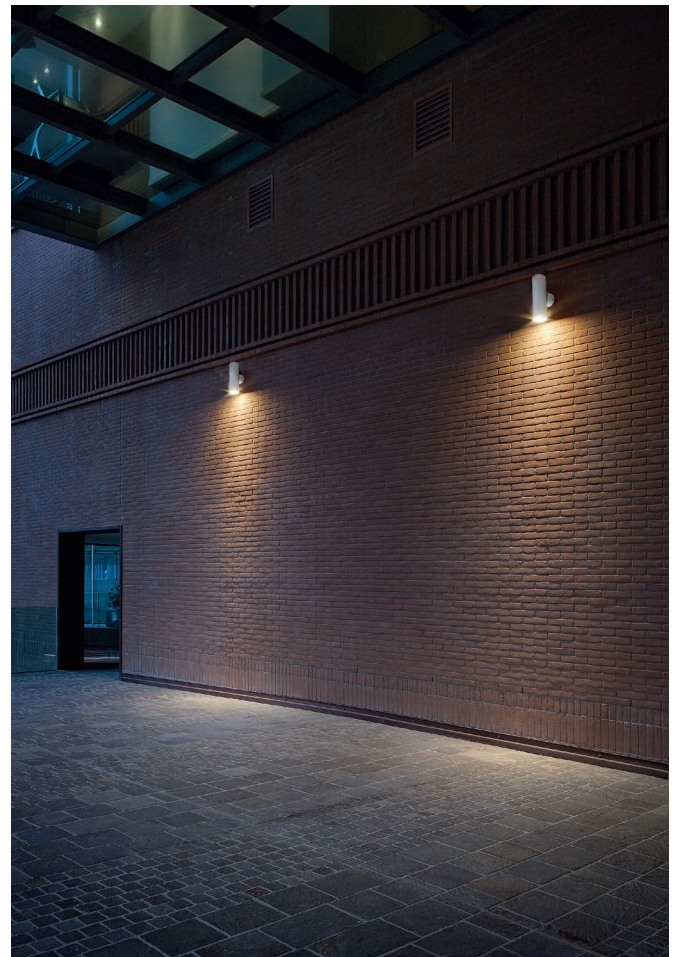

Elix\_Q | Wall light | 190-250 V | powerLED 2 W 630 mA



type

Grey	CRI 80	<b>97513</b>
Cor-Ten	CRI 80	<b>97514</b>

colour


3000 K	208 lm	<b>W</b>
4000 K	222 lm	<b>N</b>
5000 K	253 lm	<b>C</b>

R - G - B - Y on request

optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

Elix\_Q | Wall light | 190-250 V | powerLED 4 W 630 mA



type

Grey	CRI 80	<b>97529</b>
Cor-Ten	CRI 80	<b>97530</b>

colour


3000 K	416 lm	<b>W</b>
4000 K	444 lm	<b>N</b>
5000 K	506 lm	<b>C</b>

R - G - B - Y on request

optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

Elix\_Q | Wall light | 180-300 V | powerLED 6 W 630 mA



type

Grey	CRI 80	<b>97517</b>
Cor-Ten	CRI 80	<b>97518</b>

colour


3000 K	624 lm	<b>W</b>
4000 K	666 lm	<b>N</b>
5000 K	759 lm	<b>C</b>

R - G - B - Y on request

optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

Elix\_Q | Wall light | 180-300 V | powerLED 12 W 630 mA



type

Grey	CRI 80	<b>97533</b>
Cor-Ten	CRI 80	<b>97534</b>

colour


3000 K	1248 lm	<b>W</b>
4000 K	1332 lm	<b>N</b>
5000 K	1518 lm	<b>C</b>

R - G - B - Y on request

optic

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

Elix\_Q | Wall light | 180-300 V | powerLED 12 W 630 mA

**type**

Grey	CRI 80	<b>97521</b>
Cor-Ten	CRI 80	<b>97522</b>

**colour**

3000 K	1248 lm	<b>W</b>
4000 K	1332 lm	<b>N</b>
5000 K	1518 lm	<b>C</b>

R - G - B - Y on request

**optic**

15°	<b>15</b>
30°	<b>30</b>
60°	<b>60</b>

