


Techo67

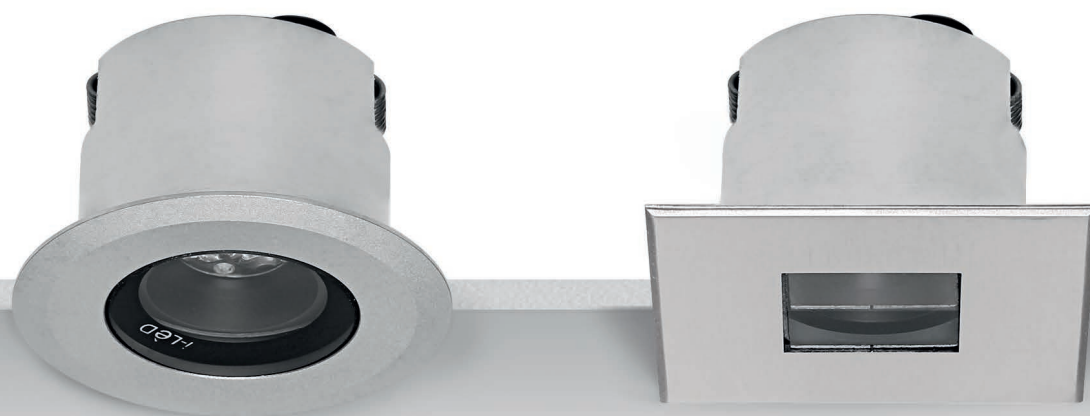

These downlights, with their 42 to 53 mm depth, will be an invaluable solution when the **available installation space is very limited**. Available with round or square flange, according to the specific preferences and needs

Passive heat dissipation


Anodised aluminium casing or AISI 316 stainless steel casing for high salinity environments

Light management


Partly black silk-screened diffuser to reduce glare

Reduced installation space

Reduced installation space, with an overall depth of few centimetres

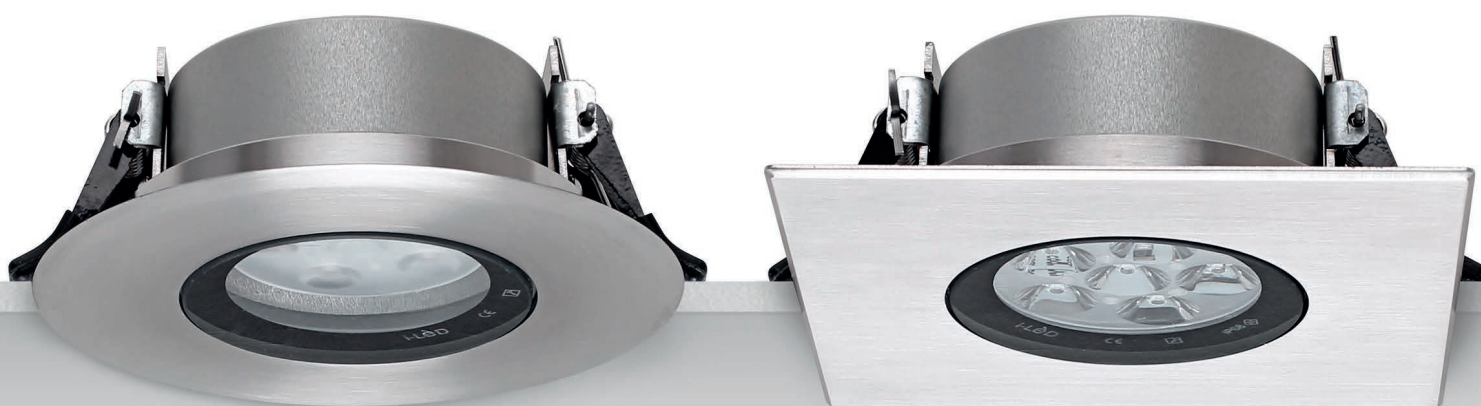

Techo67_R | Downlight | powerLED 3 W 350 mA



51

type

Steel/Alu CRI 80 **96201**

colour

2700 K	363 lm	M
3000 K	390 lm	W
4000 K	414 lm	N

optic

15°	15
30°	30
60°	60



89421
ON/OFF
1 - 2 art.





99183
ON/OFF
2 - 4 art.



98057
Outer casing

Techo67_RI | Downlight | powerLED 3 W 350 mA



51

type

Steel CRI 80 **96203**

colour

2700 K	363 lm	M
3000 K	390 lm	W
4000 K	414 lm	N

optic

15°	15
30°	30
60°	60



89421
ON/OFF
1 - 2 art.




99183
ON/OFF
2 - 4 art.



98057
Outer casing

Techo67_R | Downlight | powerLED 6 W 350 mA



100

type

Steel/Alu CRI 80 **93982**

colour

2700 K	726 lm	M
3000 K	780 lm	W
4000 K	828 lm	N

optic

8°	08
30°	30
60°	60
Diff.	00





89421
ON/OFF
1 art.



2 x 99183
ON/OFF
1 - 2 art.

Techo67_RI | Downlight | powerLED 6 W 350 mA



110

type

Steel CRI 80 **93990**

colour

2700 K	726 lm	M
3000 K	780 lm	W
4000 K	828 lm	N

optic

8°	08
30°	30
60°	60
Diff.	00




89421
ON/OFF
1 art.



99183
ON/OFF
1 - 2 art.

Techo67_Q | Downlight | powerLED 3 W 350 mA



51

type

Steel/Alu CRI 80 **96202**

colour

colour	lumens	type	optic
2700 K	363 lm	M	15° 15
3000 K	390 lm	W	30° 30
4000 K	414 lm	N	60° 60

optic



89421
ON/OFF
1 - 2 art.





99183
ON/OFF
2 - 4 art.



98057
Outer casing

Techo67_QI | Downlight | powerLED 3 W 350 mA



51

type

Steel CRI 80 **96204**

colour

colour	lumens	type	optic
2700 K	363 lm	M	15° 15
3000 K	390 lm	W	30° 30
4000 K	414 lm	N	60° 60

optic



89421
ON/OFF
1 - 2 art.




99183
ON/OFF
2 - 4 art.



98057
Outer casing

Techo67_Q | Downlight | powerLED 6 W 350 mA



100

type

Steel/Alu CRI 80 **93983**

colour

colour	lumens	type	optic
2700 K	726 lm	M	8° 08
3000 K	780 lm	W	30° 30
4000 K	828 lm	N	60° 60
			Diff. 00

optic






89421
ON/OFF
1 art.



99183
ON/OFF
1 - 2 art.

Techo67_QI | Downlight | powerLED 6 W 350 mA

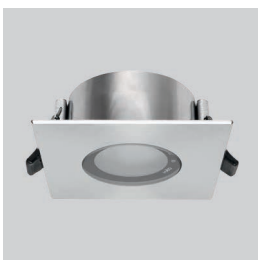

110

type

Steel CRI 80 **93991**

colour

colour	lumens	type	optic
2700 K	726 lm	M	8° 08
3000 K	780 lm	W	30° 30
4000 K	828 lm	N	60° 60
			Diff. 00

optic



89421
ON/OFF
1 art.



99183
ON/OFF
1 - 2 art.