

# KOL DAN



REF. 20040

MAX 9,3 W | 27K - 787lm | 3K - 829 lm  
4K - 876 lm | 350 mA







REF. 20041

MAX 2x9,3 W | 27K - 1574lm | 3K - 1658 lm  
4K - 1752 lm | 350 mA



REF. 20006


MAX 16,3 W | 27K - 1373 lm | 3K - 1445 lm  
4K - 1522 lm | 500 mA

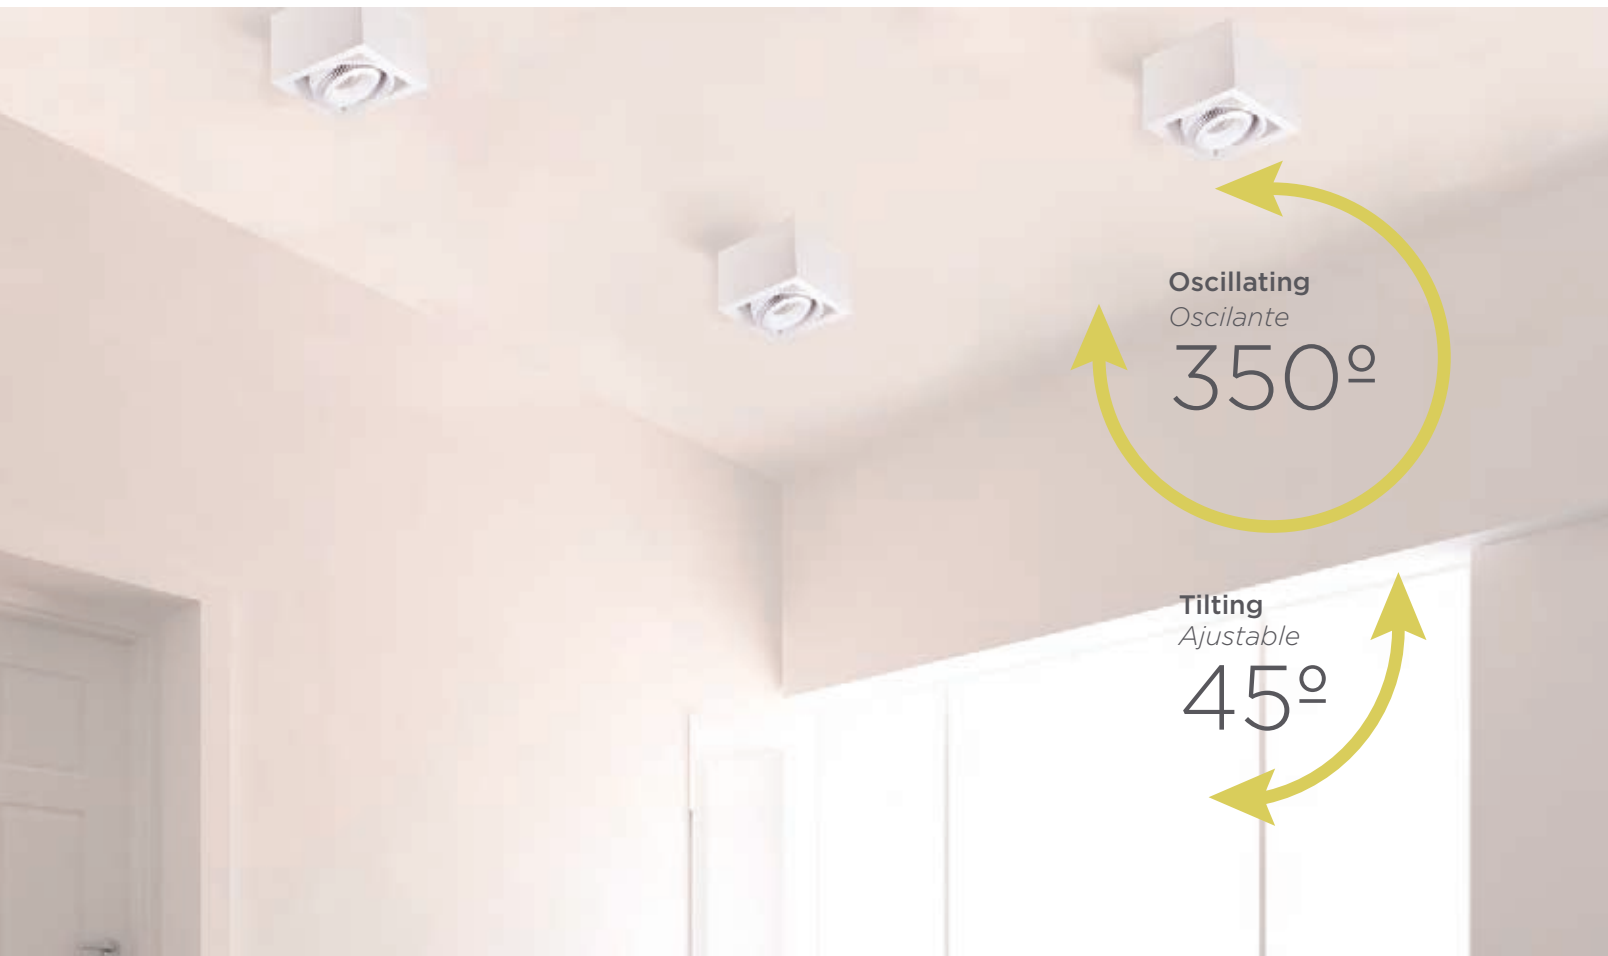




## REF. 20007

MAX 2x16,3 W | 27K - 2746lm | 3K - 2890 lm  
4K - 3044 lm | 500 mA



## REF. 20008


MAX 3x16,3 W | 27K - 4119lm | 3K - 4335 lm  
4K - 4566 lm | 500 mA

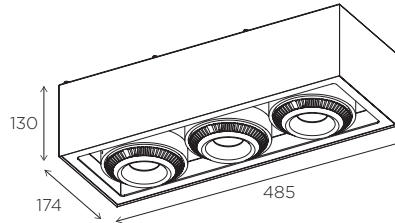

### LED THEME - LED TEMÁTICO



### PHOTOMETRY - FOTOMETRÍA

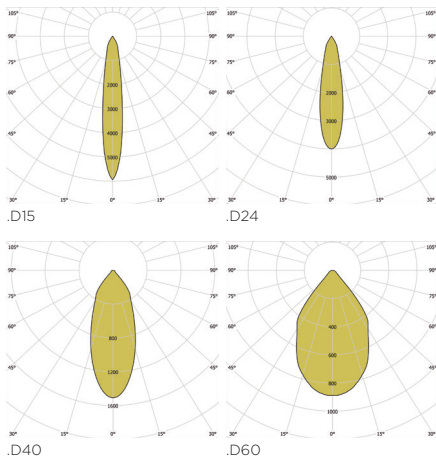

You can find all photometry data in our web.

Puedes encontrar todas las fotometrías en nuestra web.

### OTHER INSTALLATION - OTRA INSTALACIÓN

.TR

PAG. 102

.RF

PAG. 322

#### Configuration: REF + #

##### External color finish - Acabado exterior

White - Blanco .W Black - Negro .BK

Black & White - Blanco y negro .BW

##### Reflector

15° .D15 24° .D24

40° .D40 60° .D60

##### Color Temperature - Temperatura de color

2700K .27K 3000K .3K

4000K .4K

##### Dimmable options - Opciones de regulación

1.10V .D1 DALI .DA

Push - Pulsador .PU