


Ø 86



Ø 88

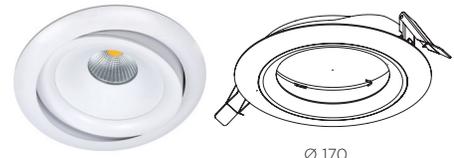

Ø 170

REF. 3280

REF. 3282

REF. 3285

CUT OUT - AGUJERO DE CORTE Ø 75 mm


CUT OUT - AGUJERO DE CORTE Ø 80 mm

CUT OUT - AGUJERO DE CORTE Ø 160 mm

LED	PAR16 GU10	QR-CBC 51 GUS.3	LED	PAR16 GU10	QR-CBC 51 GUS.3	BPM3181 LED PROCELIA	QR-111 G53	HS ES11 GU10	CDM-T GX8.5
MAX 10 W	MAX 50 W	MAX 50 W	MAX 10 W	MAX 50 W	MAX 50 W	MAX 16 W	MAX 100 W	MAX 75 W	MAX 70 W
27K - 776 lm 3K - 817 lm 4K - 858 lm	-	-	27K - 776 lm 3K - 817 lm 4K - 858 lm	-	-	27K - 1370 lm 3K - 1442 lm 4K - 1522 lm	-	-	-
300 mA	-	-	300 mA	-	-	500 mA	-	-	-
INC.	-	-	INC.	-	-	INC.	-	-	-
.01	.02	.03	45°	45°	45°	45°	45°	45°	45°
.01	.02	.03	.01	.02	.03	.01	.02	.03	.04



LUCIA® SQUARE

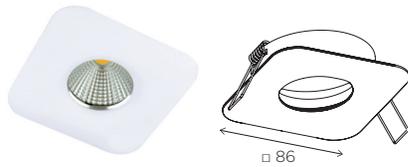

REF. 3281


REF. 3283

CUT OUT - AGUJERO DE CORTE \varnothing 80 mm


CUT OUT - AGUJERO DE CORTE \varnothing 80 mm

LED	PAR16 GU10	QR-CBC 51 GU5.3
MAX 10 W	MAX 50 W	MAX 50 W
27K - 776 lm 3K - 817 lm 4K - 858 lm	-	-
300 mA	-	-
INC.	-	-
.01	.02	.03

LED	PAR16 GU10	QR-CBC 51 GU5.3
MAX 10 W	MAX 50 W	MAX 50 W
27K - 776 lm 3K - 817 lm 4K - 858 lm	-	-
300 mA	-	-
INC.	-	-
45°	45°	45°
.01	.02	.03

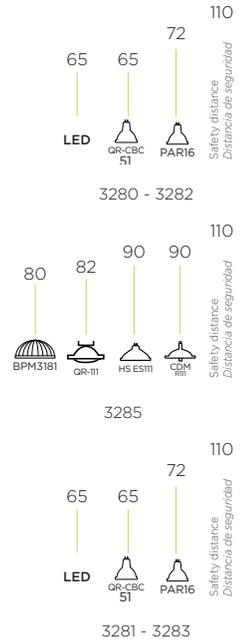

PHOTOMETRY - FOTOMETRÍA

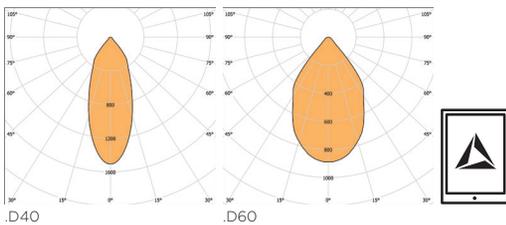

Configuration: REF +

Finish

White - Blanco .W Anodized gray - Gris anodizado .AG

Black - Negro .BK

Reflector

40° .D40 60° .D60

Color Temperature - Temperatura de color

2700K .27K 3000K .3K

4000K .4K

Dimmable options - Opciones de regulación

1.10V .D1 DALI .DA

Push - Pulsador .PU

