





REF. 20022

MAX 9,3 W | 27K - 787lm | 3K - 829 lm
4K - 876 lm | 350 mA




REF. 20023

MAX 2x9,3 W | 27K - 1574 | 3K - 1658 lm
4K - 1752 lm | 350 mA

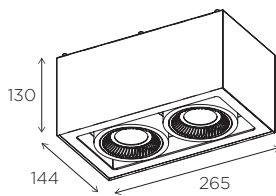

REF. 20015

MAX 16,3 W | 27K - 1373 lm | 3K - 1445 lm
4K - 1522 lm | 500 mA




Oscillating
Oscilante
350°

Tilting
Ajustable
45°




REF. 20016

MAX 2x16,3 W | 27K - 2746lm | 3K - 2890 lm
4K - 3044 lm | 500 mA

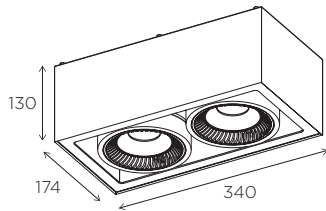

REF. 20017


MAX 3x16,3 W | 27K - 4119lm | 3K - 4335 lm
4K - 4566 lm | 500 mA

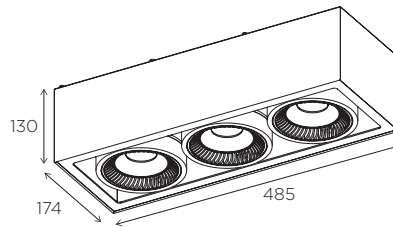

LED THEME - LED TEMÁTICO



PHOTOMETRY - FOTOMETRÍA

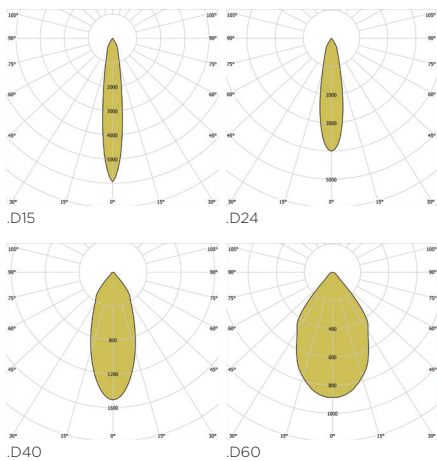

You can find all photometry data in our web.
Puedes encontrar todas las fotometrías en nuestra web.

OTHER INSTALLATION - OTRA INSTALACIÓN

| | | | |
|-----|----------|-----|----------|
| .TR | PAG. 100 | .RF | PAG. 318 |
|-----|----------|-----|----------|

Configuration: REF + #

| | | | |
|---|------|---------------|------|
| External color finish - Acabado exterior | | | |
| White - Blanco | .W | Black - Negro | .BK |
| Black & White - Blanco y negro | | | .BW |
| Reflector | | | |
| 15° | .D15 | 24° | .D24 |
| 40° | .D40 | 60° | .D60 |
| Color Temperature - Temperatura de color | | | |
| 2700K | .27K | 3000K | .3K |
| 4000K | .4K | | |
| Dimmable options - Opciones de regulación | | | |
| 1.10V | .D1 | DALI | .DA |
| Push - Pulsador | .PU | | |