


SISTEMA LED

SYSTEM



MODULAR FLEXIBILITY FOR INDIVIDUAL DISPLAYS

- Single, double or triple-cell frame, individually equipped with luminaire modules, blank plates and spotlight elements.
- Various light colours, beam angles and luminous flux packages enable individual goods illumination.
- Tool-free mounting from frame to light module, and simple replacement of all SISTEMA modules – even from HIT to LED.
- Further versions on request.

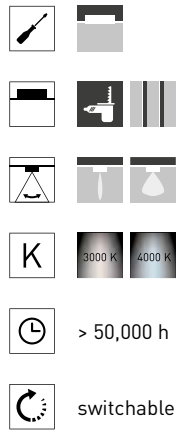



SISTEMA triple-cell




SISTEMA double-cell





LED system, installation module can be cardanically swivelled through 30°, 1-cell luminaire frame





| Reference | TOC | Incl. transformer |  | EEC | W | ≈kg |
|---|-----------|-------------------|---|----------|----|-----|
| Spot | | | | | | |
| Sistema SRS-SP LED 3000-830 A35...MP 01 | 63 893... | ...50 | 2920 lm | A++/A+/A | 28 | 1.5 |
| Sistema SRS-SP LED 3000-840 A37...MP 01 | 63 894... | ...50 | 3090 lm | A++/A+/A | 28 | 1.5 |
| Sistema SRS-SP LED 4000-830 A39...MP 01 | 63 897... | ...50 | 3570 lm | A++/A+/A | 35 | 1.5 |
| Sistema SRS-SP LED 4000-840 A41...MP 01 | 63 898... | ...50 | 3760 lm | A++/A+/A | 35 | 1.5 |
| Medium-Flood | | | | | | |
| Sistema SRS-MF LED 3000-830 A35...MP 01 | 63 891... | ...50 | 2920 lm | A++/A+/A | 28 | 1.5 |
| Sistema SRS-MF LED 3000-840 A37...MP 01 | 63 892... | ...50 | 3090 lm | A++/A+/A | 28 | 1.5 |
| Sistema SRS-MF LED 4000-830 A39...MP 01 | 63 895... | ...50 | 3570 lm | A++/A+/A | 35 | 1.5 |
| Sistema SRS-MF LED 4000-840 A41...MP 01 | 63 896... | ...50 | 3760 lm | A++/A+/A | 35 | 1.5 |

LED system, installation module can be cardanically swivelled through 30°, 2-cell luminaire frame



| Reference | TOC | Incl. transformer | | EEC | W | =kg |
|---|-----------|-------------------|---------|----------|----|-----|
| Spot | | | | | | |
| Sistema SRS-SP 2LED 3000-830 A35...MP 01 | 63 901... | ...50 | 5840 lm | A++/A+/A | 56 | 2.7 |
| Sistema SRS-SP 2LED 3000-840 A37...MP 01 | 63 902... | ...50 | 6180 lm | A++/A+/A | 56 | 2.7 |
| Sistema SRS-SP 2LED 4000-830 A39...MP 01 | 63 905... | ...50 | 7140 lm | A++/A+/A | 70 | 2.7 |
| Sistema SRS-SP 2LED 4000-840 A41...MP 01 | 63 906... | ...50 | 7520 lm | A++/A+/A | 70 | 2.7 |
| Medium-Flood | | | | | | |
| Sistema SRS-MF 2LED 3000-830 A35...MP 01 | 63 899... | ...50 | 5840 lm | A++/A+/A | 56 | 2.7 |
| Sistema SRS-MF 2LED 3000-840 A37...MP 01 | 63 900... | ...50 | 6180 lm | A++/A+/A | 56 | 2.7 |
| Sistema SRS-MF 2LED 4000-830 A39...MP 01 | 63 903... | ...50 | 7140 lm | A++/A+/A | 70 | 2.7 |
| Sistema SRS-MF 2LED 4000-840 A41...MP 01 | 63 904... | ...50 | 7520 lm | A++/A+/A | 70 | 2.7 |

LED system, installation module can be cardanically swivelled through 30°, 3-cell luminaire frame

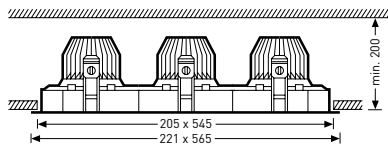

| Reference | TOC | Incl. transformer | | EEC | W | ≈kg |
|--|-----------|-------------------|----------|----------|-----|-----|
| Spot | | | | | | |
| Sistema SRS-SP 3LED 3000-830 A35...MP 01 | 63 909... | ...50 | 8760 lm | A++/A+/A | 84 | 3.9 |
| Sistema SRS-SP 3LED 3000-840 A37...MP 01 | 63 910... | ...50 | 9270 lm | A++/A+/A | 84 | 3.9 |
| Sistema SRS-SP 3LED 4000-830 A39...MP 01 | 63 913... | ...50 | 10710 lm | A++/A+/A | 105 | 3.9 |
| Sistema SRS-SP 3LED 4000-840 A41...MP 01 | 63 914... | ...50 | 11280 lm | A++/A+/A | 105 | 3.9 |
| Medium-Flood | | | | | | |
| Sistema SRS-MF 3LED 3000-830 A35...MP 01 | 63 907... | ...50 | 8760 lm | A++/A+/A | 84 | 3.9 |
| Sistema SRS-MF 3LED 3000-840 A37...MP 01 | 63 908... | ...50 | 9270 lm | A++/A+/A | 84 | 3.9 |
| Sistema SRS-MF 3LED 4000-830 A39...MP 01 | 63 911... | ...50 | 10710 lm | A++/A+/A | 105 | 3.9 |
| Sistema SRS-MF 3LED 4000-840 A41...MP 01 | 63 912... | ...50 | 11280 lm | A++/A+/A | 105 | 3.9 |