


#### UNBEATABLE EFFICIENCY FOR ANY SPORTS HALL

- The concept of Actison is synonymous with top achievements in sports halls: extreme energy efficiency and a highly robust exterior ( > 100 lm/W).
- The Actison's tough housing withstands maximum loads and guarantees safety.
- The ActisonPlus features a service life of up to 100,000 hours.
- The Actison has flexible applications in all mounting methods surface-mounting, recessing or suspending.



Protective grid with quick-release catch

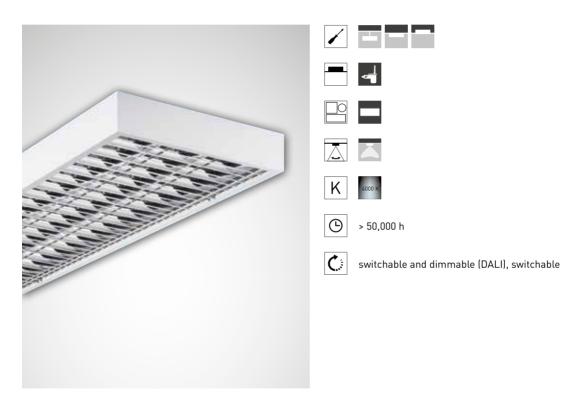


Cover with IP50 protection rating



#### Ball-proof surface-mounted luminaires with RSX louvre with accessories also as recessed and suspended luminaires









Reference	тос	···ETDD	ЕТ	<i></i> .⊹	EEC	W	≈kg
LED							
• Actison RSX2 8000-840···	64 594…	-	40	8200 lm	A++/A+/A	75	10.3
Actison RSX2 9300-840	64 593	51	40	9400 lm	A++/A+/A	82	10.3
-					• IK	(10/20	960 °C

## Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RSX louvre







Reference	TOC	···EDD	···E	- <u>A</u> -	EEC	≈kg
2-lamp						
• Actison RSX 249···	59 026	07	04	2 x 49	A+/A/B	10.3
Actison RSX 280···	59 027…	07	04	2 x 80	A+/A/B/C	10.3

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RSX louvre








<b></b>	DE		$C \in$	IP20
120	نت	$\subseteq$	~	11 20

Reference	TOC	···ETDD	···ET	-∳-	EEC	W	≈kg
LED							-
Actison RSX3 12000-840	61 999	51	40	12000 lm	A++/A+/A	110	22.0
Actison RSX3 14000-840	61 998	51	40	14000 lm	A++/A+/A	123	22.0

IK10/20 J 960 °C

## Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RSX louvre







D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---


		_	_		
₹%	₩.			$\epsilon$	IP20

Reference	TOC	···EDD	···E	- <b>∴</b> -	EEC	≈kg
3-lamp				<u> </u>		
Actison RSX 349···	59 029	07	04	3 x 49	A+/A/B	15.8
Actison RSX 380···	59 030	07	04	3 x 80	A+/A/B/C	15.8
3-lamp, multi-lamp ballast						
ActisonPlus RSX 335/49/80···	59 028	07	-	3 x 35/49/80	A+/A/B/C	15.8
					11/40/00 1	01000

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RSX louvre

D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---









Reference	тос	···EDD	···E	- <u>A</u> -	EEC	≈kg
4-lamp						
• Actison RSX 449···	59 031	07	04	4 x 49	A+/A/B	15.8
Actison RSX 480···	59 032	07	04	4 x 80	A+/A/B/C	15.8
					• IK10/20 J	960 °C

## Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RSX louvre and PMMA cover








		_	_		
₹%	₩.		<b>(</b>	$\epsilon$	IP50

Reference	тос	···EDD	···E	- <u>A</u> -	EEC	≈kg
2-lamp						
• Actison S-RSX 249···	59 047	07	04	2 x 49	A+/A/B	11.2
Actison S-RSX 280···	59 048	07	04	2 x 80	A+/A/B/C	11.2

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RSX louvre and PMMA cover








D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---

<b>X</b>	Ø₽.	<b>(3)</b>		$\epsilon$	IP50
----------	-----	------------	--	------------	------

Reference	TOC	···EDD	…Е	-∳-	EEC	≈kg
3-lamp						
Actison S-RSX 349···	59 050	07	04	3 x 49	A+/A/B	15.9
Actison S-RSX 380···	59 051	07	04	3 x 80	A+/A/B/C	15.9
3-lamp, multi-lamp ballast						
ActisonPlus S-RSX 335/49/80···	59 049	07	-	3 x 35/49/80	A+/A/B/C	15.9
					• IK10/20 J	960 °C

# Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RSX louvre and PMMA cover








D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---

<b>Æ</b>	DVE		$C \in$	IP50

Reference	тос	···EDD	···E	<i>-</i> ☆	EEC	≈kg
4-lamp						
Actison S-RSX 449···	59 052	07	04	4 x 49	A+/A/B	16.0
Actison S-RSX 480···	59 053	07	04	4 x 80	A+/A/B/C	16.0

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RWS louvre










Reference	тос	···EDD	···Е	- <u>A</u> -	EEC ≈
2-lamp					
Actison RWS 249…	59 033	07	04	2 x 49	A+/A/B 12
Actison RWS 280···	59 034	07	04	2 x 80	A+/A/B/C 12
					• IK10/20 J 960

# Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RWS louvre








D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---

-m		~	_		
<b></b>	₽	$(\Box)$	( <del>1</del> )	CE	IP20

Reference	тос	···EDD	···E	-∳-	EEC	≈kg
3-lamp						
Actison RWS 349···	59 036	07	04	3 x 49	A+/A/B	16.7
Actison RWS 380···	59 037	07	04	3 x 80	A+/A/B/C	16.7
3-lamp, multi-lamp ballast						
ActisonPlus RWS 335/49/80···	59 035	07	-	3 x 35/49/80	A+/A/B/C	16.7

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RWS louvre







D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---

<b>3</b>	NE.	<b>(2)</b>	$\bigoplus$	CE	IP20
Œ	Œ	•		77	IPZU

Reference	тос	···EDD	···E	- <b>∴</b> -	EEC	≈kg
4-lamp						
Actison RWS 449···	59 038	07	04	4 x 49	A+/A/B	16.9
Actison RWS 480···	59 039	07	04	4 x 80	A+/A/B/C	16.9
					• IK10/20 J	960 °C

## Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RWS louvre and PMMA cover








		_	_		
<b>Z</b> Z	Ø₽.		<b>(</b>	$\epsilon$	IP50

Reference	TOC	···EDD	···E	<i></i> .	EEC	≈kg
2-lamp						
• Actison S-RWS 249···	59 054	07	04	2 x 49	A+/A/B	12.7
Actison S-RWS 280···	59 055	07	04	2 x 80	A+/A/B/C	12.7

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RWS louvre and PMMA cover








D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---

<b></b>	₽VE	$\bigoplus$	CE	IP50
130	(DE)	$\equiv$	νc	1150

Reference	TOC	···EDD	···E	- <b>∴</b> -	EEC	≈kg
3-lamp						
Actison S-RWS 349···	59 057	07	04	3 x 49	A+/A/B	17.9
Actison S-RWS 380···	59 058	07	04	3 x 80	A+/A/B/C	17.9
3-lamp, multi-lamp ballast						
ActisonPlus S-RWS 335/49/80···	59 056	07	-	3 x 35/49/80	A+/A/B/C	17.9
					• IK10/20 J	960 °C

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with RWS louvre and PMMA cover







D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---

<b>I</b>	Ø <sub>E</sub>	<b>(</b>	CE	IP50
1257		 _	•	

Reference	тос	···EDD	···E	- <b>∴</b> -	EEC	≈kg
4-lamp						
Actison S-RWS 449…	59 059	07	04	4 x 49	A+/A/B	18.1
Actison S-RWS 480···	59 060	07	04	4 x 80	A+/A/B/C	18.1

#### Ball-proof surface-mounted luminaires, with accessories also as recessed and suspended luminaire with STB specular parabolic reflector










Reference	тос	···EDD	···E	- <b>☆</b> -	EEC	≈kg
2-lamp						
• Actison STB 249···	59 019	07	04	2 x 49	A+/A/B	10.3
Actison STB 280···	59 020	07	04	2 x 80	A+/A/B/C	10.3
					• IK10/20 J 9	960 °C

#### Ball-proof surface-mounted luminaires, with accessories also as recessed and suspended luminaire with STB specular parabolic reflector







D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---

₹₹	Ø₽.	<b>(</b>	$\epsilon$	IP20

Reference	TOC	···EDD	···E	- <b>∴</b> -	EEC	≈kg
3-lamp						
Actison STB 349···	59 022	07	04	3 x 49	A+/A/B	14.7
Actison STB 380···	59 023	07	04	3 x 80	A+/A/B/C	14.7
3-lamp, multi-lamp ballast						
ActisonPlus STB 335/49/80···	59 021	07	-	3 x 35/49/80	A+/A/B/C	14.7
					11/40/00 1	01000

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with STB specular parabolic reflector







<b>3</b>	Ø <sub>E</sub>		CE	IP20
170	ك	$\subseteq$	~ ~	11 20

Reference	тос	···EDD	···E	<b>☆</b>	EEC	≈kg
4-lamp						
• Actison STB 449···	59 024	07	04	4 x 49	A+/A/B	14.8
Actison STB 480···	59 025	07	04	4 x 80	A+/A/B/C	14.8
					• IK10/20 J	960 °C

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with STB specular parabolic reflector and PMMA cover








<b>W</b>	Ø <sub>E</sub>	<b>(3)</b>		$\epsilon$	IP50
----------	----------------	------------	--	------------	------

Reference	тос	···EDD	···E	- <u>A</u> -	EEC	≈kg
2-lamp						
• Actison S-STB 249···	59 040	07	04	2 x 49	A+/A/B	11.2
Actison S-STB 280···	59 041	07	04	2 x 80	A+/A/B/C	11.2

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with STB specular parabolic reflector and PMMA cover








D2: 260/Actison---3---, 300/Actison---4---E2: 65/Actison---3---, 50/Actison---4---

<b>X</b>	Ø₽.	<b>(3)</b>		$\epsilon$	IP50
----------	-----	------------	--	------------	------

Reference	TOC	···EDD	…Е	-∳-	EEC	≈kg
3-lamp						
• Actison S-STB 349···	59 043	07	04	3 x 49	A+/A/B	15.9
Actison S-STB 380···	59 044	07	04	3 x 80	A+/A/B/C	15.9
3-lamp, multi-lamp ballast						
ActisonPlus S-STB 335/49/80···	59 042	07	-	3 x 35/49/80	A+/A/B/C	15.9
	,				• IK10/20 J	960 °C

#### Ball-proof surface-mounted luminaires with accessories also as recessed and suspended luminaire with STB specular parabolic reflector and PMMA cover







D2: 260/Actison···3···, 300/Actison···4··· E2: 65/Actison···3···, 50/Actison···4···

<b></b>	Ø <sub>E</sub>		<b>(</b>	Œ	IP50
1257		~	$\overline{}$	•	

Reference	TOC	···EDD	Е		EEC	≈kq
Reference	100	200	-	杂	223	-119
4-lamp						
• Actison S-STB 449···	59 045	07	04	4 x 49	A+/A/B	16.0
Actison S-STB 480···	59 046	07	04	4 x 80	A+/A/B/C	16.0

#### Actison accessories

Reference	тос	Accessory description	≈kg
Actison AE 280	59 505 00	Counter-balance weight for 2-lamp Actison, see online catalogue for LED versions	0.4
Actison AE 380	59 506 00	Counter-balance weight for 3-lamp Actison, see online catalogue for LED versions	0.4
Actison BAB 1	59 503 00	Ball safety shield, 2-lamp, mounting only in combination with trunking 110N··· and mounting bracket Actison TS1	1.6
Actison BAB 2 59 504 00		Ball safety shield, 3- and 4-lamp, mounting only in combination with trunking 110N··· and mounting bracket Actison TS2	2.2
Actison C1	59 493 00	2-lamp recess accessory for ceiling cut-outs	2.8
Actison C2	59 492 00	3- and 4-lamp recess accessory for ceiling cut-outs	3.3
Actison H	59 502 00	Suspension material	0.7
Actison H LB	59 501 00	Suspension material continuous line	0.6
Actison H LB LED	62 054 00	Suspension accessories for continuous line	0.6
Actison H LED	62 053 00	Suspension accessories	0.6
Actison Paneel 1	59 495 00	2-lamp panel recess accessory	2.5
Actison Paneel 2	59 494 00	3- and 4-lamp panel recess accessory	2.8
Actison Paneel 75	59 496 00	Panel adapters 75 (1 pair)	1.8
Actison Paneel 85	59 497 00	Panel adapters 85 (1 pair)	1.4
Actison ZDV/315/80	59 509 00	Through-wiring, 3-pole, 1750 mm	0.1
Actison ZDV/515/80	59 510 00	Through-wiring, 5-pole, 1750 mm	0.2
Actison ZDV/715/80 59 511 00 Through-wiring, 7-pole, 1750 mm			0.2
Actison ZI4	59 508 00	Allen key SW 4mm	0.1

#### Angle rails



Reference	TOC	Accessory description	≈kg
110N/155	29 289 00	Angle rail, 1-length, length 1550 mm, 1 pair	4.0
110N/310	29 290 00	Angle rail, 1-length, length 3100 mm, 1 pair	8.0
113N	22 287 00	Angle rail coupling, set of 2	0.6

#### Mounting brackets

Reference	TOC	Accessory description	≈kg
Actison TS1	59 947 00	1 pair mounting brackets for 2-lamp Actison luminaires, for fixing luminaire to the trunking system	0.3
Actison TS2	59 948 00	1 pair mounting brackets for 3- and 4-lamp Actison luminaires, for fixing luminaire to the trunking system	1.0