
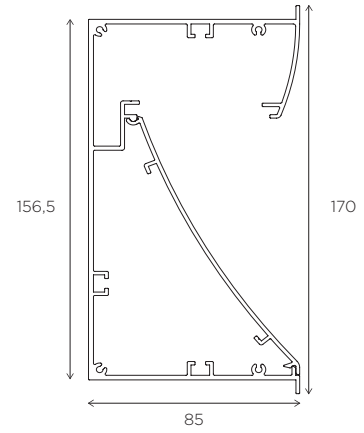



BPMLighting®
ALBENIZ

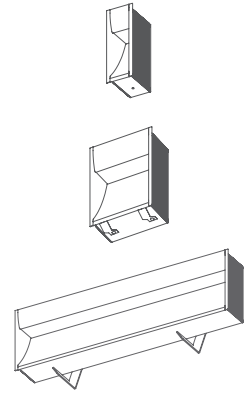

DESIGN YOUR PROJECT

LINES APPLICATION

PHOTOMETRY - FOTOMETRÍA

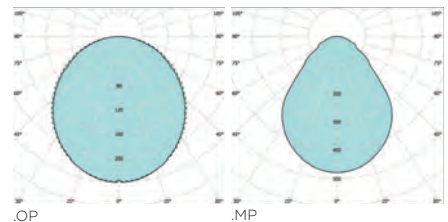

.OP

.MP





You can find all photometry data in our web.

Puedes encontrar todas las fotometrías en nuestra web.

ALBENIZ

REF. 10156

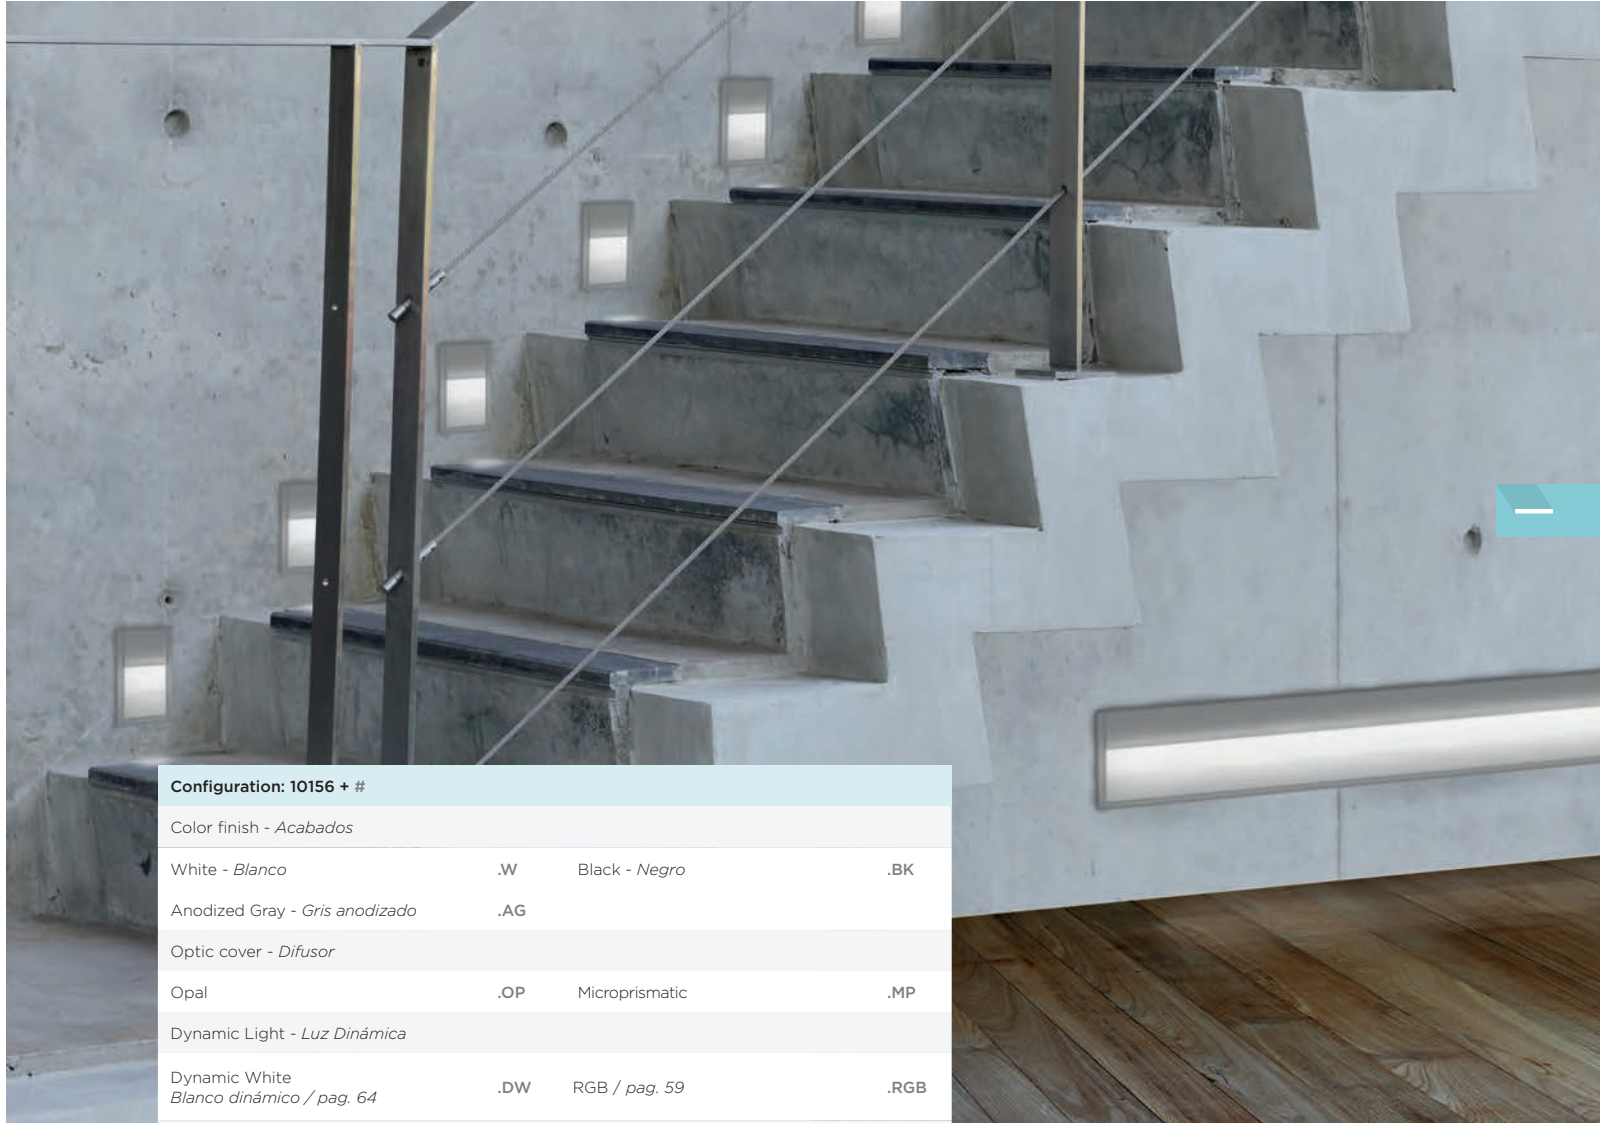

Configuration: 10156 + #			
Color finish - <i>Acabados</i>			
White - <i>Blanco</i>	.W	Black - <i>Negro</i>	.BK
Anodized Gray - <i>Gris anodizado</i>	.AG		
Optic cover - <i>Difusor</i>			
Opal	.OP	Microprismatic	.MP
Dynamic Light - <i>Luz Dinámica</i>			
Dynamic White <i>Blanco dinámico / pag. 64</i>	.DW	RGB / <i>pag. 59</i>	.RGB
Color Temperature - <i>Temperatura de color</i>			
2700K	.27K	3000K	.3K
4000K	.4K		
Dimmable options - <i>Opciones de regulación</i>			
1..10V	.D1	DALI	.DA
Push - <i>Pulsador</i>	.PU		

REF.	L	Power	27K / 3K / 4K	
10156.10	82 mm	3,2 W	- / 305 lm / -	80x165 mm
10156.11	120 mm	6,4 W	- / 610 lm / -	115x165 mm
10156.12	165 mm	5,9 W	820 lm / 870 lm / 910 lm	155x160 mm
10156.04	585 mm	11,8 W	1640 lm / 1740 lm / 1820 lm	575x160 mm
10156.09		23,6 W	3280 lm / 3460 lm / 3634 lm	
10156.05	865 mm	17,7 W	2460 lm / 2610 lm / 2730 lm	855x160 mm
10156.13		35,4 W	4920 lm / 5190 lm / 5452 lm	
10156.06	1145 mm	23,6 W	3280 lm / 3480 lm / 3640 lm	1135x160 mm
10156.14		45,6 W	6560 lm / 6920 lm / 7268 lm	
10156.08	1430 mm	29,50 W	4100 lm / 4350 lm / 4550 lm	1420x160 mm
10156.15		59 W	8200 lm / 8650 lm / 9085 lm	

