



ARIMO SLIM CDP LED









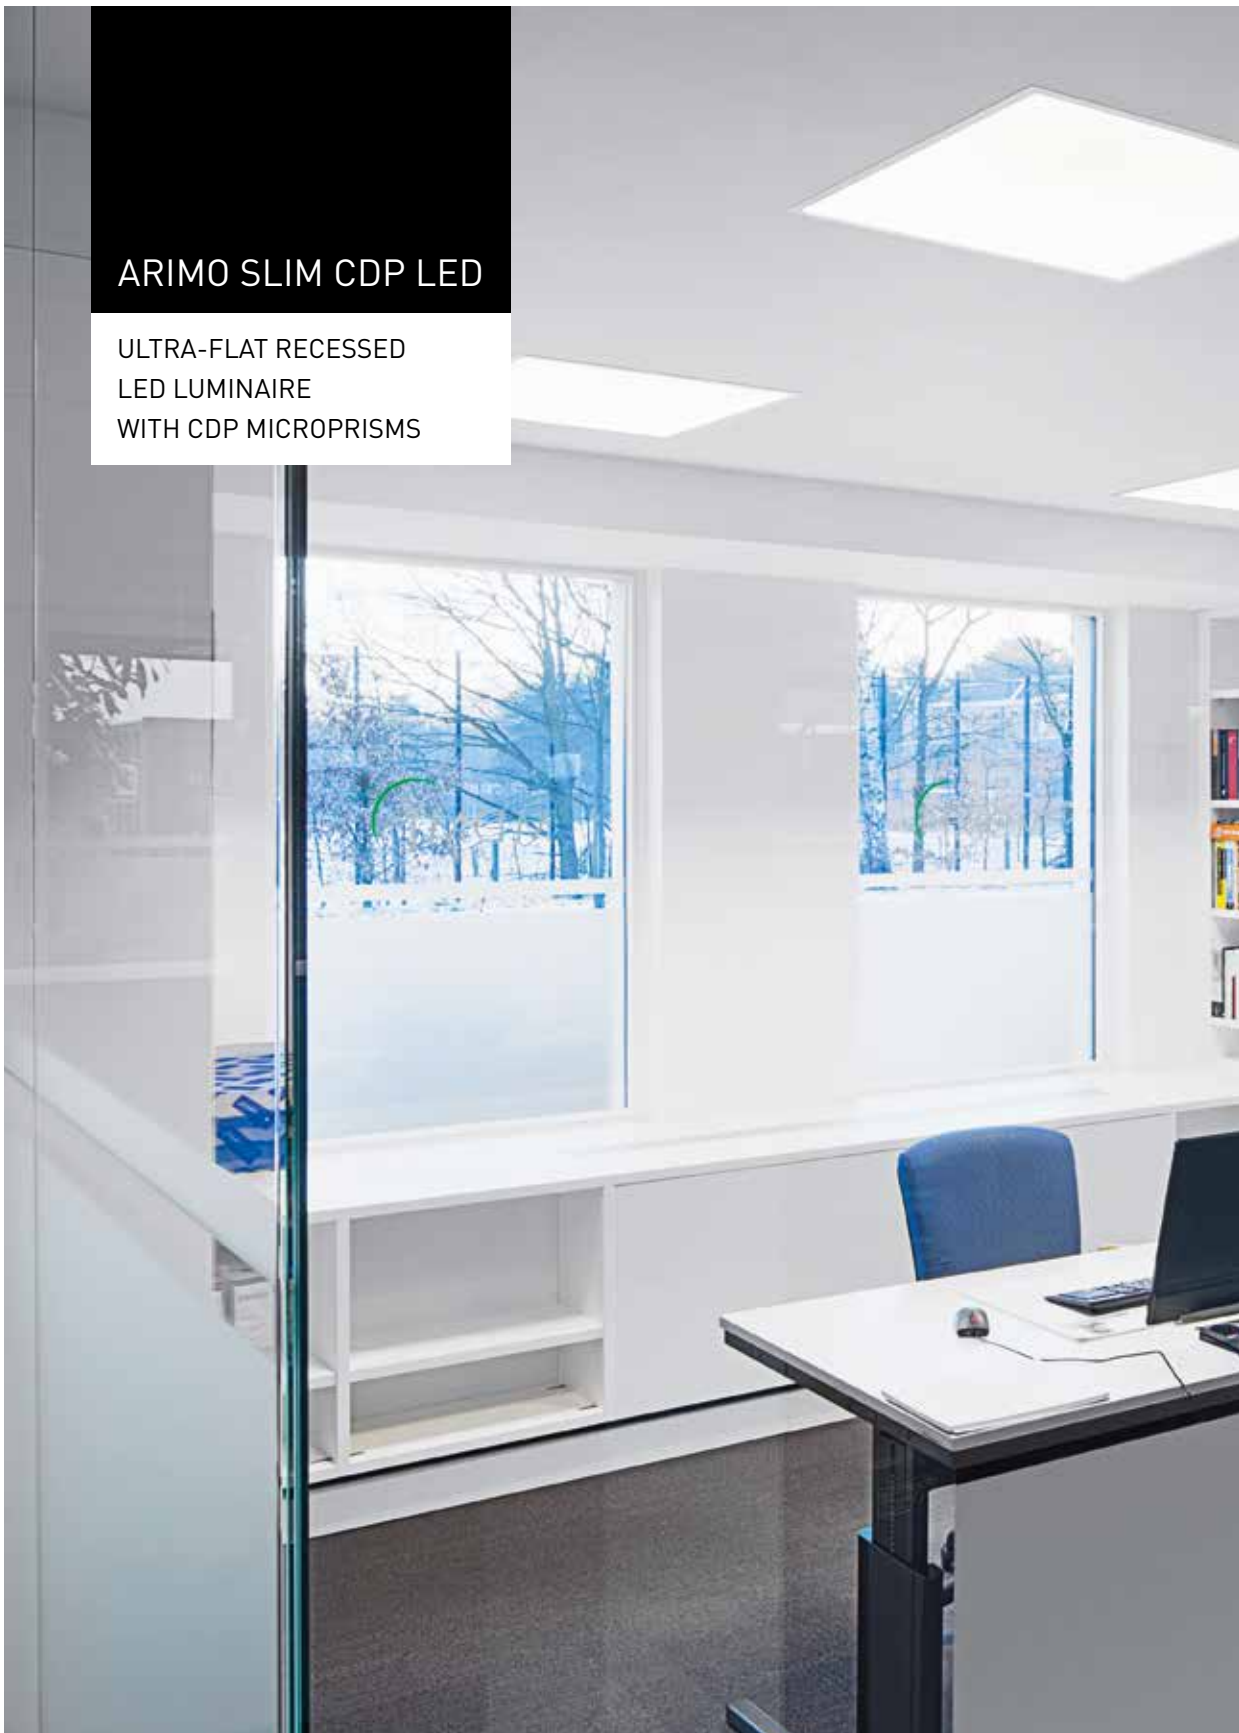

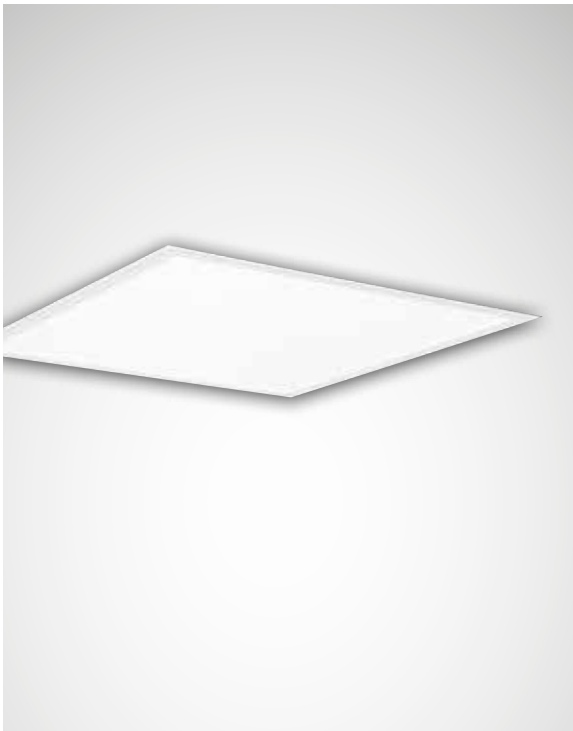







ULTRA-FLAT RECESSED
LED LUMINAIRE
WITH CDP MICROPRISMS



THE ULTRA-FLAT REFURBISHMENT SOLUTION FOR PLANAR LIGHT

- The wide-area light is especially pleasant and glare-free in accordance with standards.
- High efficiency ensures rapid pay-back of investment costs.
- The separately connectable control device ensures convenient installation.
- Plug & play connection of control device to the luminaire.
- With the 4+1 package, installation is even simpler and almost 50% quicker.





-  
-   
-   
-  
-  
-   
-  > 50,000 h
-  switchable and dimmable (DALI), switchable
-  Emergency light version with individual battery, 3 hours

Uniform illumination and glare reduction compliant to UGR19

Low housing height (20 mm)



Recessed LED luminaire with CDP microprismatic cover





System dimension 600 mm



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
Module size M73, LED, luminous flux 3000							
• ArimoS M73 CDP LED 3000-830...01	63 253...	...51	...40	2900 lm	A++/A+/A	30	5.8
ArimoS M73 CDP LED 3000-840...01	63 254...	...51	...40	3000 lm	A++/A+/A	30	5.8
ArimoS M73 CDP LED 3000-840...EB3	63 261...	...51	...40	3000 lm	A++/A+/A	35	6.8
Module size M73, LED, luminous flux 4000							
ArimoS M73 CDP LED 4000-830...01	63 255...	...51	...40	3800 lm	A++/A+/A	40	5.8
ArimoS M73 CDP LED 4000-840...01	63 256...	...51	...40	4000 lm	A++/A+/A	40	5.8
ArimoS M73 CDP LED 4000-840...EB3	63 262...	...51	...40	4000 lm	A++/A+/A	45	6.8

• IK02/0.2 J 650 °C

LED-Recessed luminaires with CDP microprismatic cover as 4+1 added value package

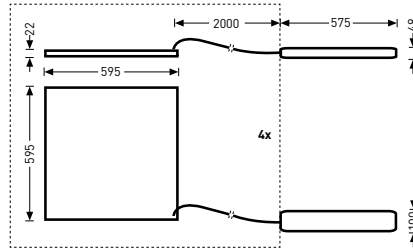




System dimension 600 mm



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
Module size M73, LED, luminous flux 4000							
• ArimoS M73 CDP 4+1 LED 4000-840...TWLi	63 802...	...51	...40	4000 lm	A++/A+/A	40	23.8

• IK02/0.2 J 650 °C

Recessed LED luminaire with CDP microprismatic cover





System dimension 625 mm



Reference	TOC	...ETDD	...ET		EEC	W	=kg
Module size M84, LED, luminous flux 3000							
• ArimoS M84 CDP LED 3000-830...01	63 257...	...51	...40	2900 lm	A++/A+/A	30	5.8
ArimoS M84 CDP LED 3000-840...01	63 258...	...51	...40	3000 lm	A++/A+/A	30	5.8
ArimoS M84 CDP LED 3000-840...EB3	63 263...	...51	...40	3000 lm	A++/A+/A	35	7.0
Module size M84, LED, luminous flux 4000							
ArimoS M84 CDP LED 4000-830...01	63 259...	...51	...40	3800 lm	A++/A+/A	40	5.8
ArimoS M84 CDP LED 4000-840...01	63 260...	...51	...40	4000 lm	A++/A+/A	40	5.8
ArimoS M84 CDP LED 4000-840...EB3	63 264...	...51	...40	4000 lm	A++/A+/A	45	7.0

• IK02/0.2 J 650 °C

LED-Recessed luminaires with CDP microprismatic cover as 4+1 added value package

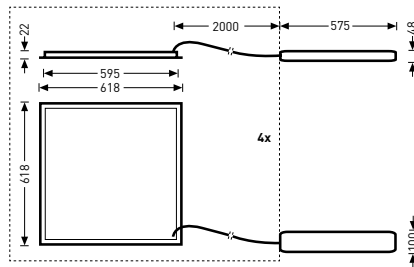


System dimension 625 mm



Reference	TOC	...ETDD	...ET		EEC	W	=kg
Module size M84, LED, luminous flux 4000							
• ArimoS M84 CDP 4+1 LED 4000-840...TWLI	63 803...	...51	...40	4000 lm	A++/A+/A	40	23.9

• IK02/0.2 J 650 °C

Recessed LED luminaires with CDP microprismatic cover, long construction size

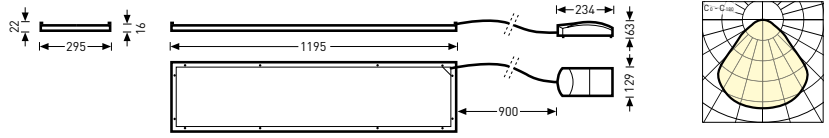



System dimension 300 mm



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
Module size M46, LED, luminous flux 3600							
• ArimoS M46 CDP LED 3600-830...01	64 916...	...51	...40	3500 lm	A++/A+/A	37	5.5
ArimoS M46 CDP LED 3600-840...01	64 917...	...51	...40	3600 lm	A++/A+/A	37	5.5
Module size M46, LED, luminous flux 4500							
ArimoS M46 CDP LED 4500-830...01	64 918...	...51	...40	4300 lm	A++/A+/A	46	5.5
ArimoS M46 CDP LED 4500-840...01	64 919...	...51	...40	4500 lm	A++/A+/A	46	5.5

• IK02/0.2 J 650 °C

Recessed LED luminaires with CDP microprismatic cover, long construction size

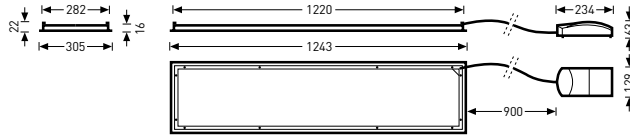

System dimension 312.5 mm



Reference	TOC	...ETDD	...ET		EEC	W	=kg
Module size M57, LED, luminous flux 3600							
• ArimoS M57 CDP LED 3600-830...01	64 924...	...51	...40	3500 lm	A++/A+/A	37	5.8
ArimoS M57 CDP LED 3600-840...01	64 925...	...51	...40	3600 lm	A++/A+/A	37	5.8
Module size M57, LED, luminous flux 4500							
ArimoS M57 CDP LED 4500-830...01	64 926...	...51	...40	4300 lm	A++/A+/A	46	5.8
ArimoS M57 CDP LED 4500-840...01	64 927...	...51	...40	4500 lm	A++/A+/A	46	5.8


• IK02/0.2 J 650 °C

Mounting accessories

Reference	TOC	Accessory description	=kg
ArimoS CDP ZBB/1	63 608 00	Mounting accessory for installation in cut ceiling apertures. For ArimoS M84 CDP LED recessed luminaires.	0.1

ARIMO SLIM MRX LED



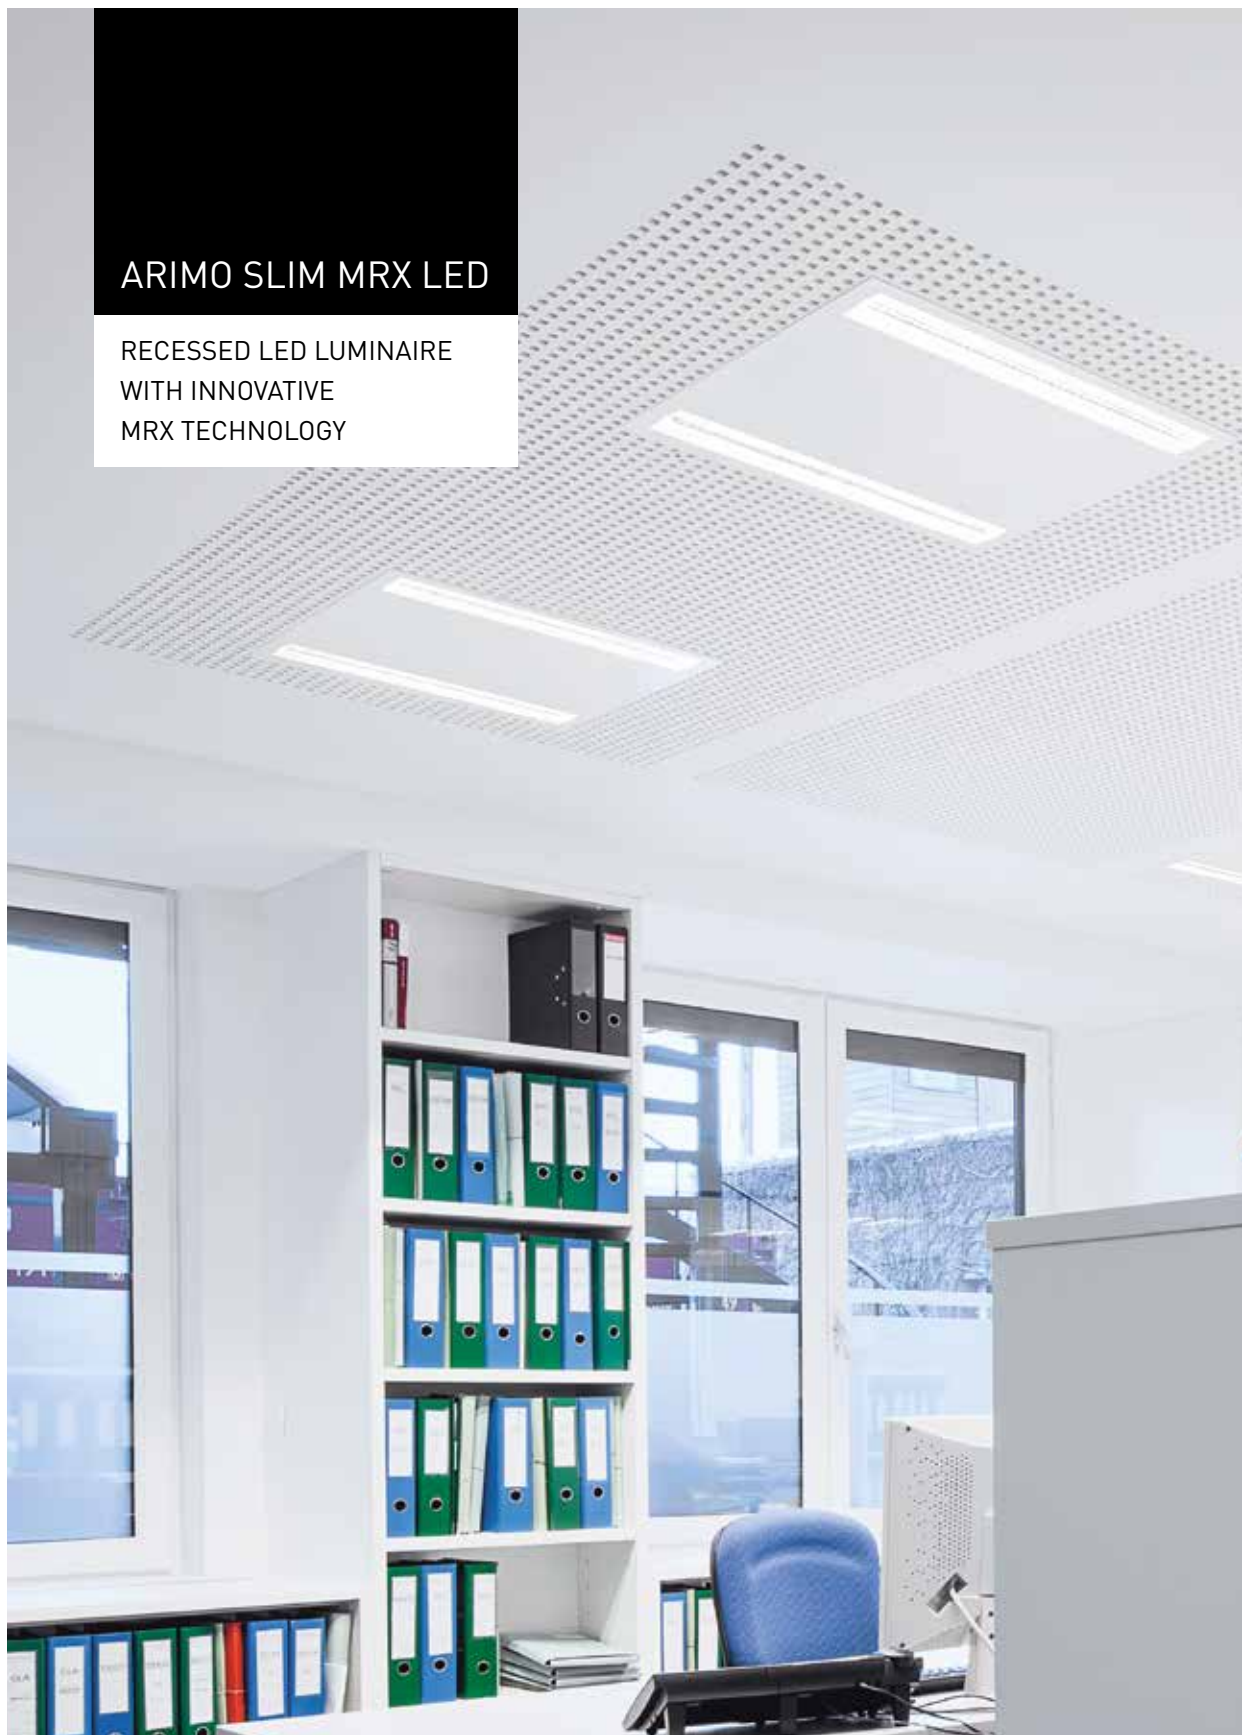















RECESSED LED LUMINAIRE
WITH INNOVATIVE
MRX TECHNOLOGY



BRINGS FRESH AIR INTO EVERYDAY WORK

- With Micro Reflector Technology (MRX) the light itself is pleasant and without glare even with high luminous flux packages (UGR19 < 1500 cd/m²).
- The compact construction provides sufficient mounting space even in tight ceiling conditions, but is still designed to integrate light management or emergency light components.
- Four luminaires share one power connection, thereby cutting installation time by almost 50%.





-  
-    
-   
-  
-  ✓
-   
-  > 50,000 h
-  switchable and dimmable (DALI), switchable
-  Emergency light version with individual battery, 3 hours, Linect® luminaire connection system

Micro Reflector Technology (MRX)

Also as 4+1 added value package



Recessed LED luminaire with micro reflector technology





System dimension 600 mm



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
Module size M73, LED, luminous flux 3000							
• ArimoS M73 MRX LED 3000-830...TWLi	63 241...	...51	...40	2800 lm	A++/A+/A	26	4.1
ArimoS M73 MRX LED 3000-840...EB3 TWLi	63 249...	-	...40	2900 lm	A++/A+/A	31	4.1
ArimoS M73 MRX LED 3000-840...TWLi	63 242...	...51	...40	2900 lm	A++/A+/A	26	4.1
ArimoS M73 MRX LED 3000-840...EB3	63 249...	...51	-	2900 lm	A++/A+/A	31	4.1
Module size M73, LED, luminous flux 4000							
ArimoS M73 MRX LED 4000-830...TWLi	63 243...	...51	...40	3800 lm	A++/A+/A	38	4.1
ArimoS M73 MRX LED 4000-840...EB3 TWLi	63 250...	-	...40	4000 lm	A++/A+/A	43	4.1
ArimoS M73 MRX LED 4000-840...TWLi	63 244...	...51	...40	4000 lm	A++/A+/A	38	4.1
ArimoS M73 MRX LED 4000-840...EB3	63 250...	...51	-	4000 lm	A++/A+/A	43	4.1

• IK02/0.2 J 650 °C

Recessed LED luminaires with micro reflector technology as 4+1 added value package

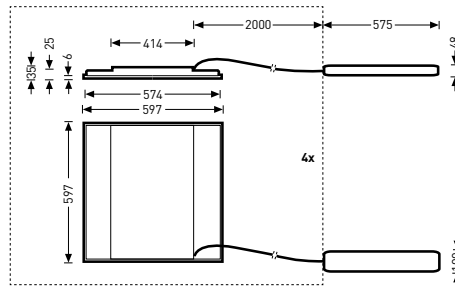



System dimension 600 mm



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
Module size M73, LED, luminous flux 4000							
ArimoS M73 MRX 4+1 LED 4000-840...TWLi	63 804...	...51	...40	4000 lm	A++/A+/A	38	19.8

• IK02/0.2 J 650 °C

Recessed LED luminaire with micro reflector technology





System dimension 625 mm



Reference	TOC	...ETDD	...ET		EEC	W	=kg
Module size M84, LED, luminous flux 3000							
• ArimoS M84 MRX LED 3000-830...TWLi	63 245...	...51	...40	2800 lm	A++/A+/A	26	4.1
ArimoS M84 MRX LED 3000-840...EB3 TWLi	63 251...	-	...40	2900 lm	A++/A+/A	31	4.1
ArimoS M84 MRX LED 3000-840...TWLi	63 246...	...51	...40	2900 lm	A++/A+/A	26	4.1
ArimoS M84 MRX LED 3000-840...EB3	63 251...	...51	-	2900 lm	A++/A+/A	31	4.1
Module size M84, LED, luminous flux 4000							
ArimoS M84 MRX LED 4000-830...TWLi	63 247...	...51	...40	3800 lm	A++/A+/A	38	4.1
ArimoS M84 MRX LED 4000-840...EB3 TWLi	63 252...	-	...40	4000 lm	A++/A+/A	43	4.1
ArimoS M84 MRX LED 4000-840...TWLi	63 248...	...51	...40	4000 lm	A++/A+/A	38	4.1
ArimoS M84 MRX LED 4000-840...EB3	63 252...	...51	-	4000 lm	A++/A+/A	43	4.1

• IK02/0.2 J 650 °C

Recessed LED luminaires with micro reflector technology as 4+1 added value package

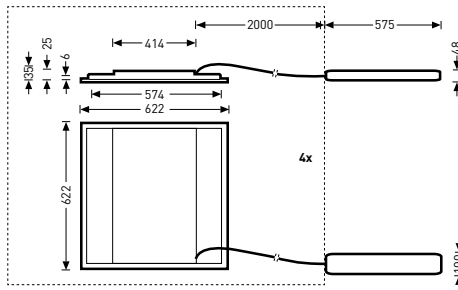



System dimension 625 mm



Reference	TOC	...ETDD	...ET		EEC	W	=kg
Module size M84, LED, luminous flux 4000							
• ArimoS M84 MRX 4+1 LED 4000-840...TWLi	63 805...	...51	...40	4000 lm	A++/A+/A	38	19.8

• IK02/0.2 J 650 °C

Recessed LED luminaires with micro reflector technology





System dimension 300 mm



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
Module size M46, LED, luminous flux 3000							
• ArimoS M46 MRX LED 3000-830...TWLi	64 378...	...51	...40	2800 lm	A++/A+/A	26	5.2
ArimoS M46 MRX LED 3000-840...TWLi	64 379...	...51	...40	2900 lm	A++/A+/A	26	5.2
Module size M46, LED, luminous flux 4000							
ArimoS M46 MRX LED 4000-830...TWLi	64 380...	...51	...40	3800 lm	A++/A+/A	38	5.2
ArimoS M46 MRX LED 4000-840...TWLi	64 381...	...51	...40	4000 lm	A++/A+/A	38	5.2

• IK02/0.2 J 650 °C

Recessed LED luminaires with micro reflector technology



System dimension 312.5 mm



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
Module size M57, LED, luminous flux 3000							
• ArimoS M57 MRX LED 3000-830...TWLi	64 382...	...51	...40	2800 lm	A++/A+/A	26	5.3
ArimoS M57 MRX LED 3000-840...TWLi	64 383...	...51	...40	2900 lm	A++/A+/A	26	5.3
Module size M57, LED, luminous flux 4000							
ArimoS M57 MRX LED 4000-830...TWLi	64 384...	...51	...40	3800 lm	A++/A+/A	38	5.3
ArimoS M57 MRX LED 4000-840...TWLi	64 385...	...51	...40	4000 lm	A++/A+/A	38	5.3

• IK02/0.2 J 650 °C

Mounting accessories

Reference	TOC	Accessory description	=kg
ArimoS MRX ZBB/1	63 610 00	Mounting accessory for installation in ceiling cut-outs and system ceilings with concealed grids in module dimensions M73/M84	1.4
ArimoS MRX ZBB/2	64 478 00	Mounting accessory for installation in ceiling cut-outs and system ceilings with concealed grids in module dimensions M46/M57	1.4