


## ARIMO SLIM D CDP LED

ULTRA-FLAT SURFACE-  
MOUNTED LED LUMINAIRE  
WITH CDP MICROPRISMS

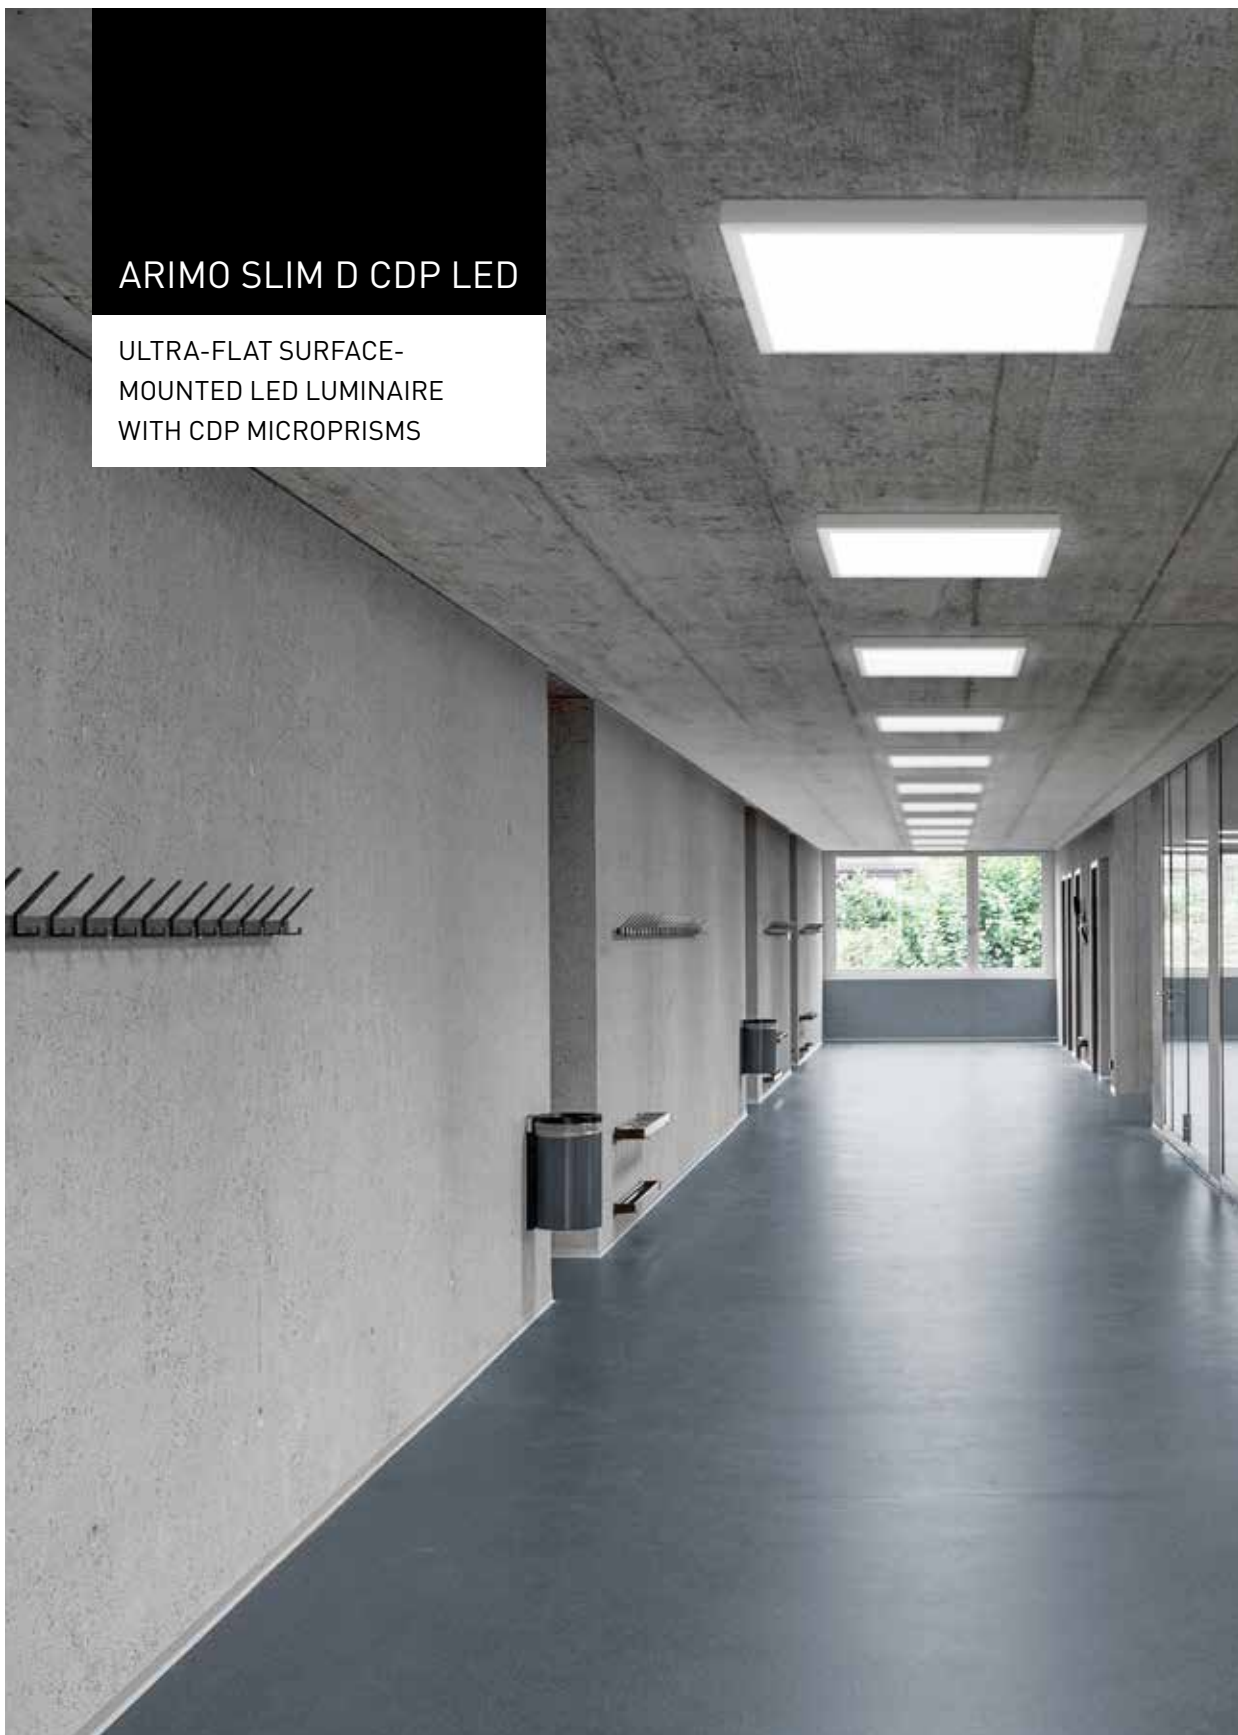

## THE ULTRA-FLAT REFURBISHMENT SOLUTION FOR PLANAR LIGHT

- The wide-area light is especially pleasant and glare-free in accordance with standards.
- Low construction height for striking LED light.
- High efficiency ensures rapid pay-back of investment costs.
- Separate mounting of frame and luminaire for convenient installation.



> 50,000 h





switchable and dimmable (DALI), switchable

Uniform illumination and glare reduction compliant to UGR19

Low housing height due to the lateral light entry





## LED surface-mounted ceiling luminaires with microprismatic cover CDP



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
• ArimoS D CDP LED 3000-830...	64 854...	...51	...40	2900 lm	A++/A+/A	30	8.3
ArimoS D CDP LED 3000-840...	64 855...	...51	...40	3000 lm	A++/A+/A	30	8.3
ArimoS D CDP LED 4000-830...	64 856...	...51	...40	3800 lm	A++/A+/A	40	8.3
ArimoS D CDP LED 4000-840...	64 857...	...51	...40	4000 lm	A++/A+/A	40	8.3

• IK02/0.2 J 650 °C

## LED surface-mounted ceiling luminaires with microprismatic cover CDP

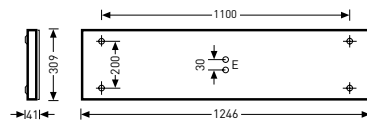


Reference	TOC	...ETDD	...ET		EEC	W	≈kg
• ArimoS D2 CDP LED 3600-830...	64 858...	...51	...40	3500 lm	A++/A+/A	37	8.6
ArimoS D2 CDP LED 3600-840...	64 859...	...51	...40	3600 lm	A++/A+/A	37	8.6
ArimoS D2 CDP LED 4500-830...	64 860...	...51	...40	4300 lm	A++/A+/A	46	8.6
ArimoS D2 CDP LED 4500-840...	64 861...	...51	...40	4500 lm	A++/A+/A	46	8.6

• IK02/0.2 J 650 °C



## ARIMO SLIM D MRX LED

SURFACE-MOUNTED  
LED LUMINAIRE WITH  
INNOVATIVE MRX TECHNOLOGY

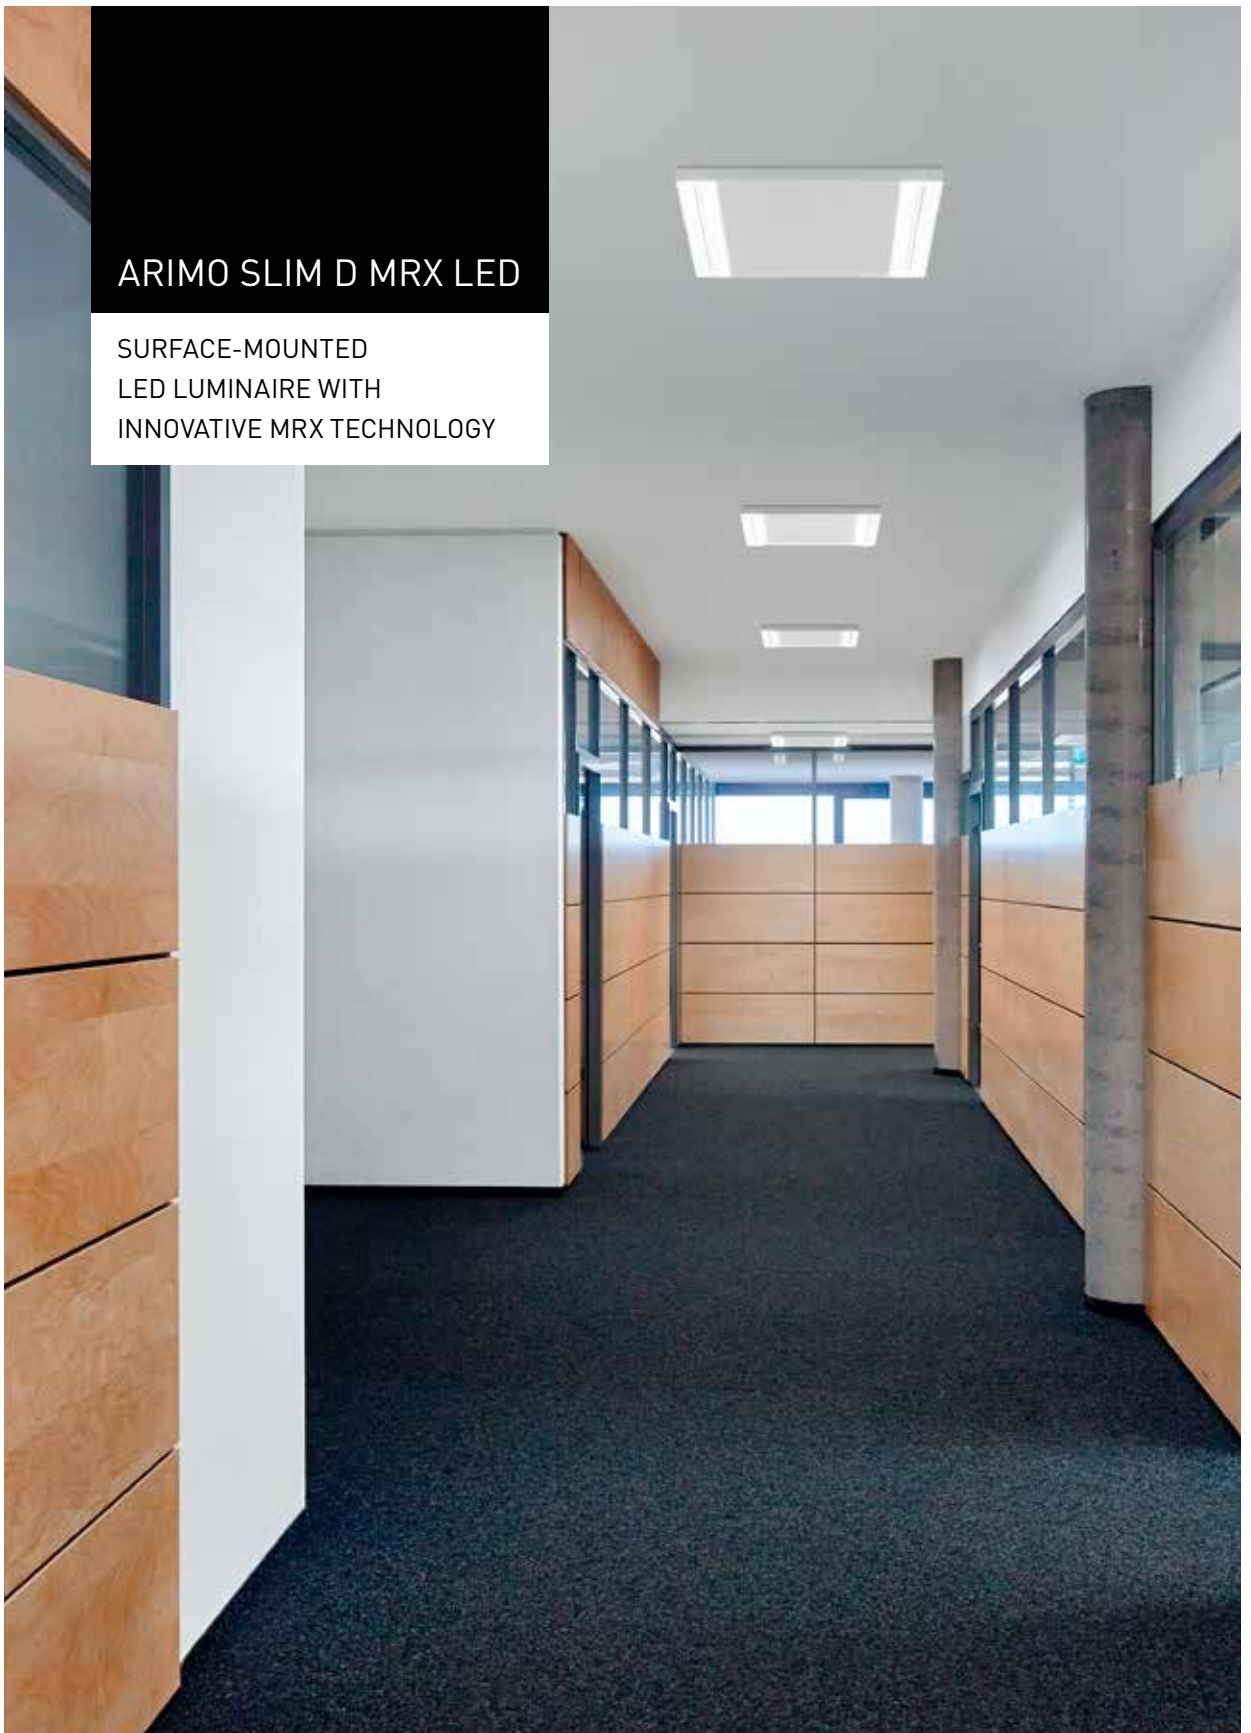

## BRINGING FRESH AIR INTO EVERYDAY WORK

- With Micro Reflector Technology (MRX) the light itself is pleasant and without glare even with high luminous flux packages (UGR19 < 1500 cd/m<sup>2</sup>).
- Above-average energy efficiency is an advantage with both new installations and refurbishments.
- Sufficient room for additional components despite compact design.



> 50,000 h





switchable and dimmable (DALI), switchable

Micro Reflector Technology (MRX)

Innovative optic with visible light edge



## LED surface-mounted luminaires with MRX micro reflector and opal PMMA covering



Reference	TOC	...ETDD	...ET		EEC	W	≈kg
• ArimoS D MRX LED 3000-830...	64 845...	...51	...40	2800 lm	A++/A+/A	26	5.5
ArimoS D MRX LED 3000-840...	64 846...	...51	...40	2900 lm	A++/A+/A	26	5.5
ArimoS D MRX LED 4000-830...	64 847...	...51	...40	3800 lm	A++/A+/A	38	5.5
ArimoS D MRX LED 4000-840...	64 848...	...51	...40	4000 lm	A++/A+/A	38	5.5

• IK02/0.2 J 650 °C