





BPMLighting®
FLORIDA
MODULAR

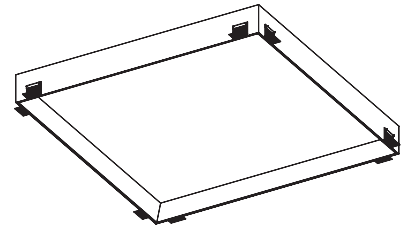

PHOTOMETRY - FOTOMETRÍA

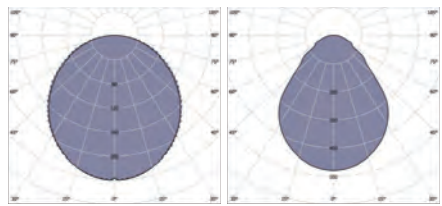

OP

.MP



You can find all photometry data in our web.
Puedes encontrar todas las fotometrías en nuestra web.

FLORIDA MODULAR

REF. 10189



REF.	Power	2700K / 3000K / 4000K	Measures mm	Modular ceiling mm
10189.01	48 W	3876 lm / 4080 lm / 4406 lm	595x595	600x600
10189.02	96 W	7539 lm / 7936 lm / 8846 lm	1195x595	600x1200

Configuration: REF + #			
Color finish - <i>Acabados</i>			
White - <i>Blanco</i>	.W	Black - <i>Negro</i>	.BK
Gold - <i>Oro</i>	.G	Aqua	.AQ
Blue - <i>Azul</i>	.BL	Pink - <i>Rosa</i>	.PI
Red - <i>Rojo</i>	.RE	Flamingo - <i>Flamenco</i>	.FL
Green - <i>Verde</i>	.GR	Orange - <i>Naranja</i>	.OR
Anodized Gray - <i>Gris anodizado</i>	.AG	Gold leaf - <i>Pan de oro</i>	.GL
Gold silver - <i>Pan de plata</i>	.SL	Copper - <i>Cobre</i>	.CO
Optic cover - <i>Difusor</i>			
Opal	.OP	Microprismatic .	.MP
Color temperature - <i>Temperatura de color</i>			
2700K	.27K	3000K	.3K
4000K	.4K		
Dimmable options - <i>Opciones de regulación</i>			
1..10V	.D1	DALI	.DA
Push - <i>Pulsador</i>	.PU		