


REF. 6605

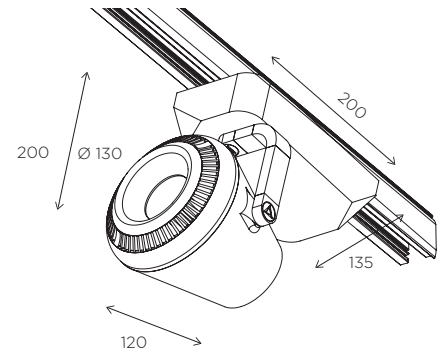



REF. 6606

BPM^{Lighting}
KOL AERIAL
 TRACK LIGHTS

LED THEME - LED TEMÁTICO



PHOTOMETRY - FOTOMETRÍA

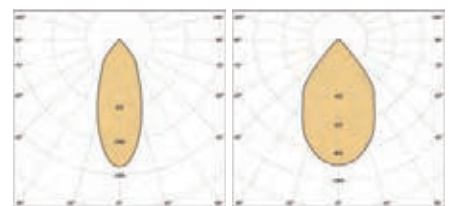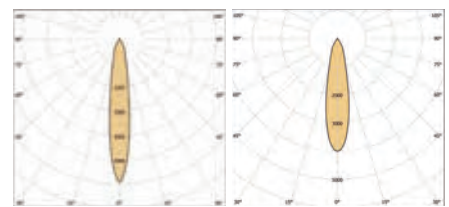


You can find all photometry data in our web.


Puedes encontrar todas las fotometrías en nuestra web.

KOL AERIAL

REF. 6605/06

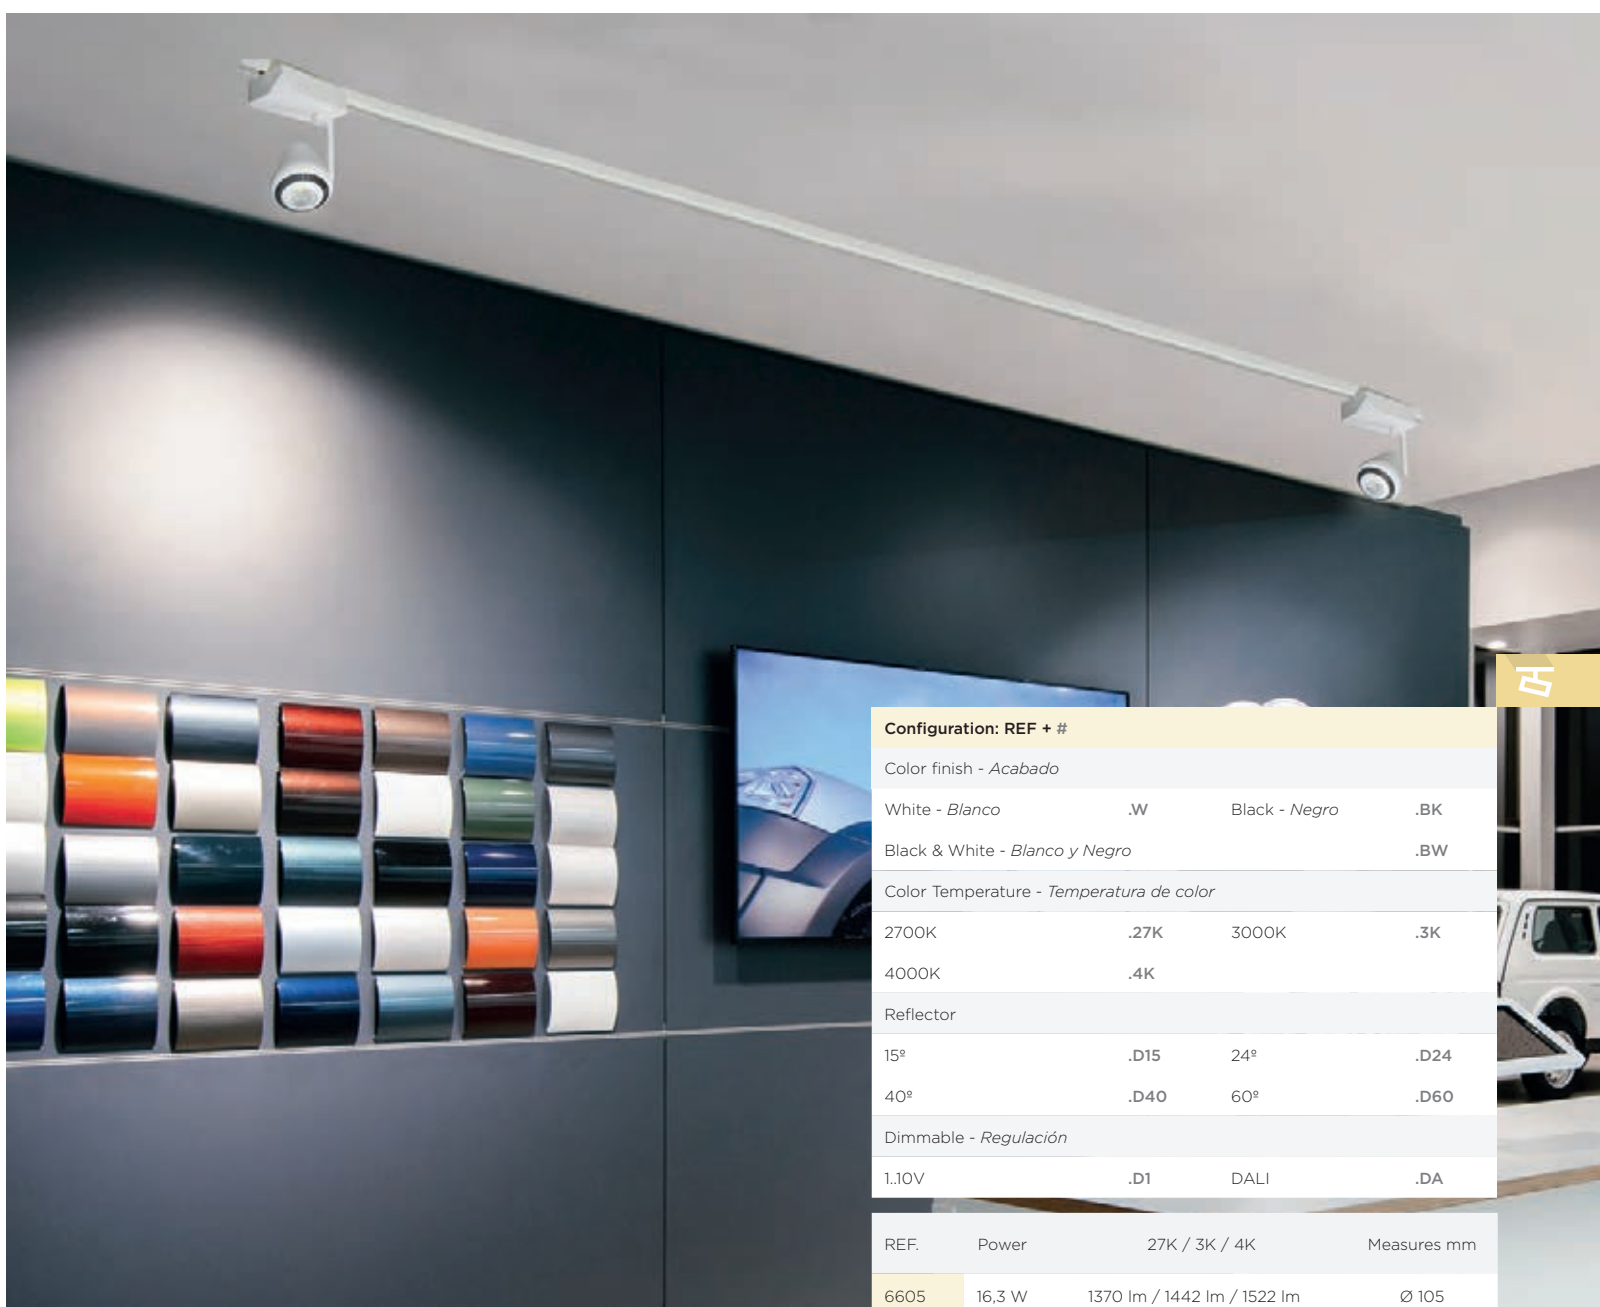

Configuration: REF + #			
Color finish - <i>Acabado</i>			
White - <i>Blanco</i>	.W	Black - <i>Negro</i>	.BK
Black & White - <i>Blanco y Negro</i>			.BW
Color Temperature - <i>Temperatura de color</i>			
2700K	.27K	3000K	.3K
4000K	.4K		
Reflector			
15°	.D15	24°	.D24
40°	.D40	60°	.D60
Dimmable - <i>Regulación</i>			
1..10V	.D1	DALI	.DA
REF.	Power	27K / 3K / 4K	Measures mm
6605	16,3 W	1370 lm / 1442 lm / 1522 lm	Ø 105
6606	23,6 W	1825 lm / 1921 lm / 2023 lm	Ø 130



REF. 6605



REF. 6606

KOL ORACLE





REF. 6612.01

MAX 23,6 W | 27K - 1825 lm | 3K - 1921 lm
4K - 2023 lm | 700 mA



REF. 6614.01

MAX 23,6 W | 27K - 1825 lm | 3K - 1921 lm
4K - 2023 lm | 700 mA

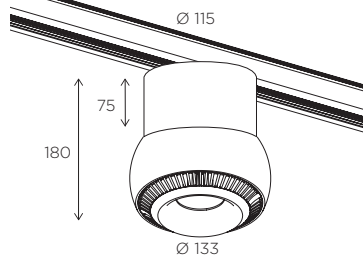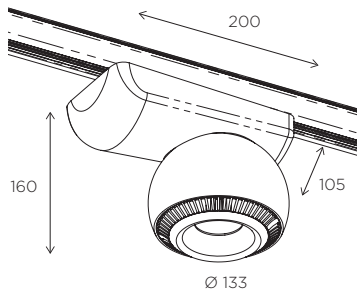

Configuration: REF +

Color finish - Acabado

White - Blanco .W Black - Negro .BK

Black & White - Blanco y Negro .BW

Color Temperature - Temperatura de color

3000K .3K 4000K .4K

Reflector

15° .D15 24° .D24

40° .D40 60° .D60

Dimmable - Regulación

1..10V .D1 DALI .DA

OTHER INSTALLATION - OTRA INSTALACIÓN

.PN


PAG. 154

.SR

PAG. 154



ORACLE





REF. 6612.02

MAX 16 W | 27K - 1370 lm | 3K - 1442 lm
4K - 1522 lm | 500 mA



REF. 6614.02


MAX 16 W | 27K - 1370 lm | 3K - 1442 lm
4K - 1522 lm | 500 mA

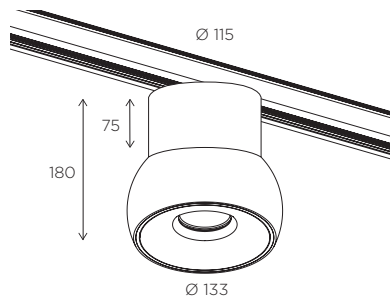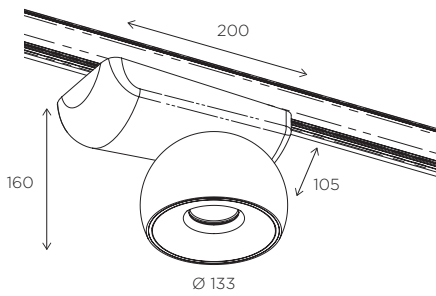

LED THEME - LED TEMÁTICO




PHOTOMETRY - FOTOMETRÍA

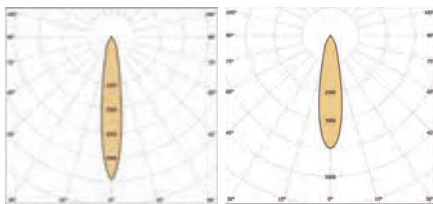

.D15

.D24

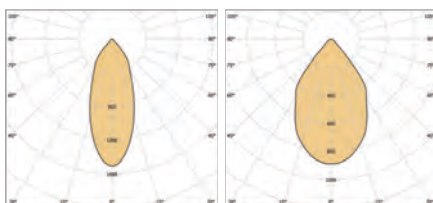

.D40

.D60



Configuration: REF +

Color finish - Acabado

White - Blanco .W Black - Negro .BK

Internal color finish - Acabado interior

Gold Oro -G Green Verde -GR

Blue Azul -BL Aqua -AQ

Red Rojo -RE Orange Naranja -OR

Flamingo Flamenco -FL Pink Rosa -PI

Black Negro -BK White Blanco -W

Anod. Gray Gris anodizado -AG Copper Cobre -CO

Color Temperature - Temperatura de color

2700K .27K 3000K .3K

4000K .4K

Reflector

15° .D15 24° .D24

40° .D40 60° .D60

Dimmable - Regulación

1..10V .D1 DALI .DA

OTHER INSTALLATION - OTRA INSTALACIÓN

.PN PAG. 156 .SR PAG. 156

