

RING

WALL LIGHTS

IP20



ES


Aplique de pared realizado en aluminio para LED de alto rendimiento con un diseño sencillo y minimalista. Ofrece un suave baño de pared en 2 direcciones. Convertidor LED incluido.

EN


Aluminium wall light with glass protection for high performance LED. Simple and minimalist design offering soft wall lighting in two directions. LED driver included.

FR

Applique murale en aluminium avec verre de protection. Conçu pour LED à haute performance avec convertisseur inclus. Son style épuré offre une lumière très douce vers le haut et vers le bas.

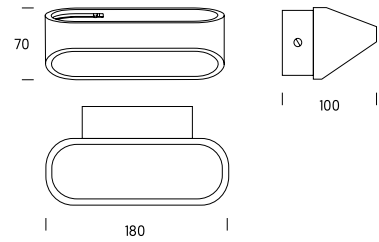

POWER

LED  230V \approx 7W > 417lm **RING A 07 N 3 9 X WS**

CRI >80

DOWNLOAD COMPLETE TECHNICAL DATA AND FILES ON: ONOKLIGHTING.COM/EN/RING

INFORMATION ABOUT PACKING SEE PAGE 324

LED CONTROL

 **N** No Dimmable RING A .. **N**

LED COLOUR TEMPERATURE

 **3** 3000° K RING A .. . **3**

LED BEAM ANGLE

 **9** Expansive RING A **9** . .

LED COMPLEMENTS

 **X** No difusser RING A **X** ..

COLOURS

 **WS** Satin White RING A **WS**