


TAURO

TRACK | CEILING

PROJECTORS

IP20

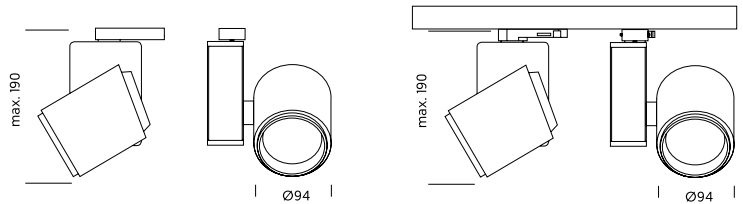

TAURO TRACK

LED		230V	≈ 20W	> 2500lm	TAUT A 20	B	..
			≈ 26W	> 2900lm	TAUT A 26	N	.	.	.	B	..
		230V	G8.5	35W	TAUT F 35	N	X	.	X	..	
		230V	G8.5	70W	TAUT F 70	N	X	.	X	..	

TAURO CEILING

LED		230V	≈ 20W	> 2500lm	TAUC A 20	B	..
			≈ 26W	> 2900lm	TAUC A 26	N	.	.	.	B	..
		230V	G 8.5	35W	TAUC F 35	N	X	.	X	..	
		230V	G 8.5	70W	TAUC F 70	N	X	.	X	..	

McAdam C3 · 50.000 h. L80 / CRI >80

DOWNLOAD COMPLETE TECHNICAL DATA AND FILES ON:
ONOKLIGHTING.COM/EN/TAURO-TRACK
ONOKLIGHTING.COM/EN/TAURO-CEILING

INFORMATION ABOUT PACKING SEE PAGE 324

LED CONTROL

	N	No Dimmable	TAU • A .. N
	F	Dimmable 1-10V / Push	TAUC A 20 F
	D	Dimmable Dali	TAU • A 20 D

LED COLOUR TEMPERATURE

	3	3000° K	TAU • A .. . 3
	4	4000° K	TAU • A .. . 4

LED BEAM ANGLE

	1	Spot	TAU • A 1
	2	Medium	TAU • A 2
	3	Medium	TAU • A 3

G8.5 BEAM ANGLE

	1	Spot 10°	TAU • F 1
	2	Medium 20°	TAU • F 2
	3	Medium 30°	TAU • F 3

COMPLEMENTS

	B	Clear Diffuser	TAU • A B ..
	X	No Complements	TAU • F X ..

COLOURS

	WS	Satin White	TAU • WS
	BS	Satin Black	TAU • BS

