







Circle. Round. **Tour**

Tour

Rigorous harmony

Circular suspension, severe and essential, aluminum body and opal diffuser, provided by topLED source internal power supply, warm and diffusive light. Three lighting options: direct, indirect and peripheral. Available in two installations option, parallel or stayed cables.

- + essential design
- + different lighting options
- + LED source





Construction details

Thanks to the latest generation machinery, we are able to control every minimum 'stretching sections' deformation due to the curvature. Tour's frame is composed by a calendered and powder coated extruded aluminum.

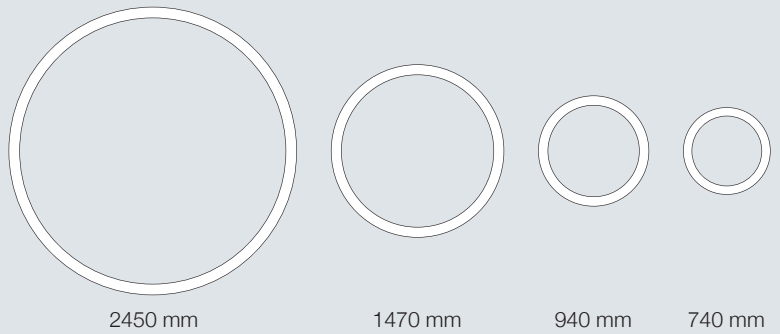
No power cable is visible, the topLEDs are powered by special extra thin steel suspension cables.

A special patented snap system provides installation of the opal polycarbonate screen along the profile, eliminating all visible joints.



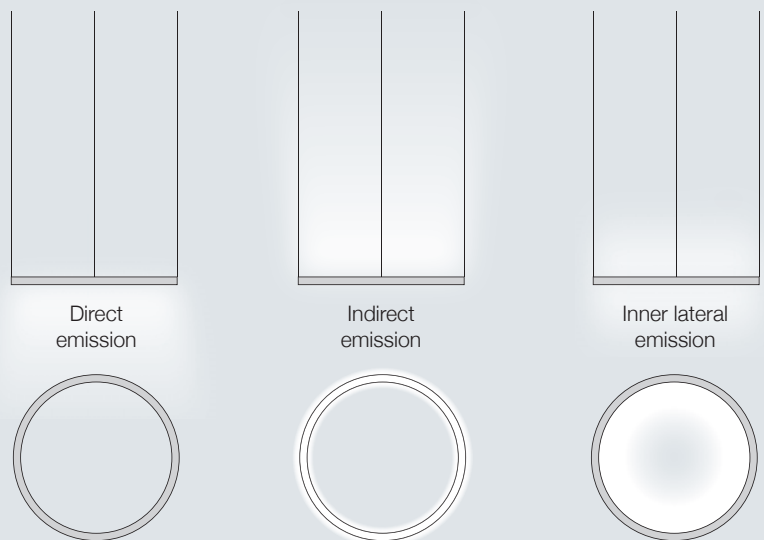
Range

Four different diameters defined by an extra slim section, makes this suspension very light and neutral, a perfect solution when a wide and diffusive lighting is needed.



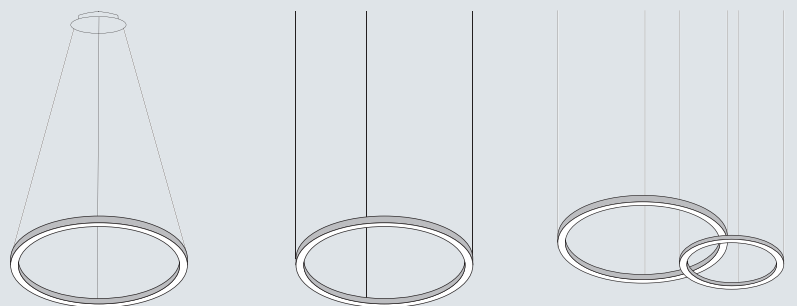
Emissions

Tour proposes three different emissions: direct, indirect and lateral. Three combinable lighting effects, able to transform spaces with a single minimal and contemporary sign of light.



Installation

Installation system provides different solutions for every application: Tour can be installed with convergent cable in a single central point or with customized tiege designed to maintain a perfect perpendicular cables' traction. Ideal solution when multiple composition is needed.



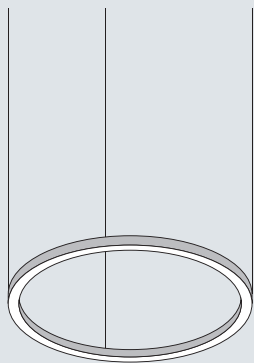




Configuration with central ceiling rose

Implementation of a Tour_PD layout with ON / OFF ceiling rose.

Tour model selection



Ceiling rose selection

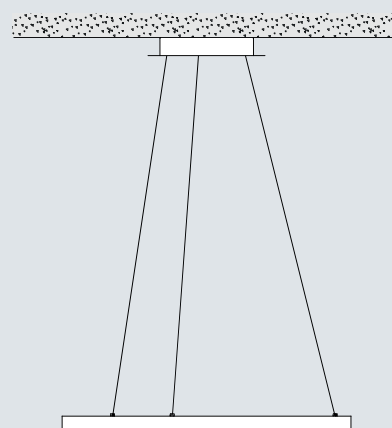


ON / OFF



DALI / 1-10V

Final outcome



Order example:

n.1 art. 64570W00
(Tour_PD1)

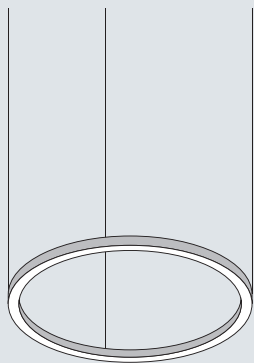
+

n.1 art. 64574
(ON/OFF)

Configuration with remote driver

Implementation of a Tour_PU layout with DALI remote driver.

Tour model selection



Suspension kit selection



Driver selection



ON/OFF

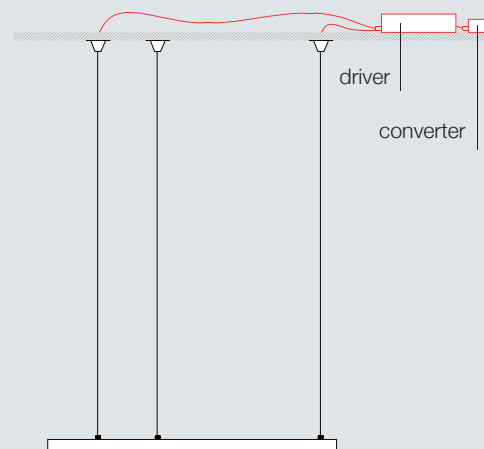


DALI/1-10 controller



PUSH converter

Final outcome



Order example:


n.1 art. 64570W00
(Tour_PD1)

+

n.1 art. 64575
(Suspensions)

+

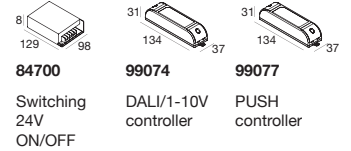

n.1 art. 84700 (driver ON/OFF)
n.1 art. 99074 (DALI/1-10V controller)

Tour_PD1 | Pendant Luminaires | topLED 36,5 W 24 V**type**

White	64570
Black	65112
Nickel	65113
Concrete	65114
Bronze	65115
Rose gold	65128

colour3000 K 4678 lm **W****optics**diffused **00**

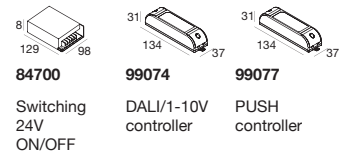

Direct emission

Pag. 286Installation
accessories**84700**Switching
24V
ON/OFF**99074**DALI/1-10V
controller**99077**PUSH
controller**Tour_PD2** | Pendant Luminaires | topLED 45 W 24 V**type**

White	64571
Black	65116
Nickel	65117
Concrete	65118
Bronze	65119
Rose gold	65129

colour3000 K 5847 lm **W****optics**diffused **00**

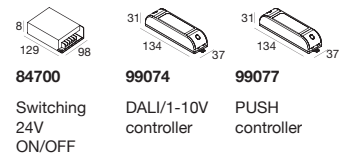

Direct emission

Pag. 286Installation
accessories**84700**Switching
24V
ON/OFF**99074**DALI/1-10V
controller**99077**PUSH
controller**Tour_PD3** | Pendant Luminaires | topLED 70 W 24 V**type**

White	64572
Black	65120
Nickel	65121
Concrete	65122
Bronze	65123
Rose gold	65130

colour3000 K 9355 lm **W****optics**diffused **00**

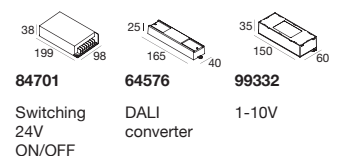
Direct emission

Pag. 286Installation
accessories**84700**Switching
24V
ON/OFF**99074**DALI/1-10V
controller**99077**PUSH
controller**Tour_PD4** | Pendant Luminaires | topLED 114 W 24 V**type**

White	64573
Black	65124
Nickel	65125
Concrete	65126
Bronze	65127
Rose gold	65131


colour3000 K 15588 lm **W****optics**diffused **00**

Direct emission

Pag. 286Installation
accessories**84701**Switching
24V
ON/OFF**64576**DALI
converter**99332**

1-10V

Tour_PI1 | Pendant Luminaires | stripLED 29 W 24 V




Internal side emission


type	
White	64577
Black	65100
Nickel	65101
Concrete	65102
Bronze	65103
Rose gold	65132

colour		optics	
3000 K	3000 lm	W	diffused 00

Pag. 286
Installation
accessories

 8 129 98	 31 134 37	 31 134 37
84700	99074	99077
Switching 24V ON/OFF	DALI/1-10V controller	PUSH controller

Tour_PI2 | Pendant Luminaires | stripLED 35,5 W 24 V




Internal side emission


type	
White	64579
Black	65104
Nickel	65105
Concrete	65106
Bronze	65107
Rose gold	65133

colour		optics	
3000 K	3785 lm	W	diffused 00

Pag. 286
Installation
accessories

 8 129 98	 31 134 37	 31 134 37
84700	99074	99077
Switching 24V ON/OFF	DALI/1-10V controller	PUSH controller

Tour_PI3 | Pendant Luminaires | stripLED 57,5 W 24 V





Internal side emission

type	
White	64581
Black	65108
Nickel	65109
Concrete	65110
Bronze	65111
Rose gold	65134

colour		optics	
3000 K	6000 lm	W	diffused 00

Pag. 286
Installation
accessories

 8 129 98	 31 134 37	 31 134 37
84700	99074	99077
Switching 24V ON/OFF	DALI/1-10V controller	PUSH controller

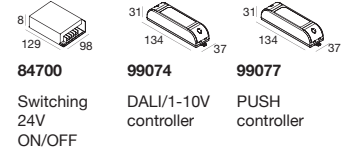

Tour_PU1 | Pendant Luminaires | topLED 36,5 W 24 V**type**

White	64583
Black	64682
Nickel	64683
Concrete	64684
Bronze	64685
Rose gold	65135

colour3000 K 4678 lm **W****optics**diffused **00**

Indirect emission

Pag. 286

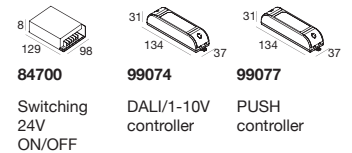

Installation
accessories**84700**Switching
24V
ON/OFF**99074**DALI/1-10V
controller**99077**PUSH
controller**Tour_PU2** | Pendant Luminaires | topLED 45 W 24 V**type**

White	64584
Black	64686
Nickel	64687
Concrete	64688
Bronze	64689
Rose gold	65136

colour3000 K 5847 lm **W****optics**diffused **00**

Indirect emission

Pag. 286

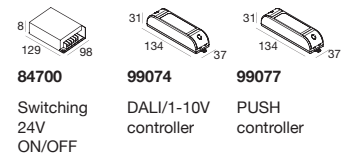

Installation
accessories**84700**Switching
24V
ON/OFF**99074**DALI/1-10V
controller**99077**PUSH
controller**Tour_PU3** | Pendant Luminaires | topLED 70 W 24 V**type**

White	64585
Black	64690
Nickel	64691
Concrete	64692
Bronze	64693
Rose gold	65137

colour3000 K 9355 lm **W****optics**diffused **00**

Indirect emission

Pag. 286

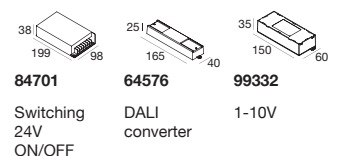
Installation
accessories**84700**Switching
24V
ON/OFF**99074**DALI/1-10V
controller**99077**PUSH
controller**Tour_PU4** | Pendant Luminaires | topLED 114 W 24 V**type**

White	64587
Black	64694
Nickel	64695
Concrete	64696
Bronze	64697
Rose gold	65138

colour3000 K 15588 lm **W****optics**diffused **00**

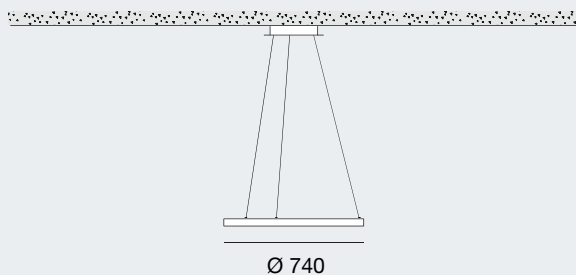

Indirect emission

Pag. 286

Installation
accessories**84701**Switching
24V
ON/OFF**64576**DALI
converter**99332**

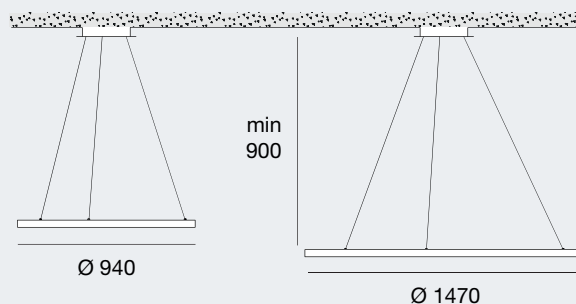

1-10V

Ceiling rose



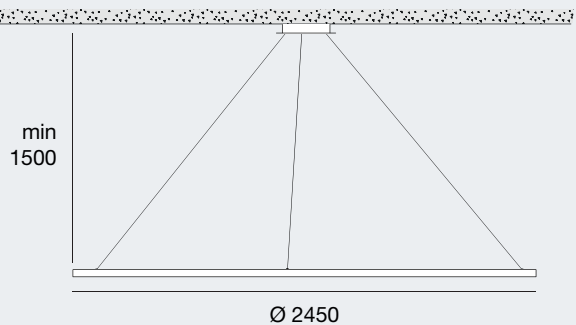

type	suitable for PD1 - PI1 - PU1	ON/OFF	DALI 1-10 V
White	64570 - 64577 - 64583	64574	64582
Black	65112 - 65100 - 64682	64674	64678
Nickel	65113 - 65101 - 64683	64675	64679
Concrete	65114 - 65102 - 64684	64676	64680
Bronze	65115 - 65103 - 64685	64677	64681
Rosegold	65128 - 65132 - 65135	65139	65140

Ceiling rose



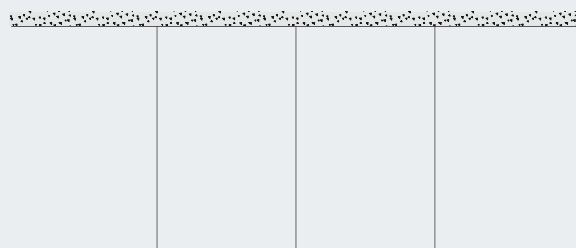

type	suitable for PD2 - PI2 - PU2 PD3 - PI3 - PU3	ON/OFF	DALI 1-10 V
White	64571 - 64572 - 64579 - 64581 - 64584 - 64585	64578	64586
Black	65116 - 65104 - 64686 - 65120 - 65108 - 64690	65142	65143
Nickel	65117 - 65105 - 64687 - 65121 - 65109 - 64691	65144	65145
Concrete	65118 - 65106 - 64688 - 65122 - 65110 - 64692	65146	65147
Bronze	65119 - 65107 - 64689 - 65123 - 65111 - 64693	65148	65149
Rosegold	65129 - 65133 - 65136 - 65130 - 65134 - 65137	65150	65151

Ceiling rose



type	suitable for PD4 - PI4 - PU4	ON/OFF	DALI 1-10 V
White	64573 - 64587	64580	64588
Black	65124 - 64694	65152	65153
Nickel	65125 - 64695	65154	65155
Concrete	65126 - 64696	65156	65157
Bronze	65127 - 64697	65158	65159
Rosegold	65131 - 65138	65160	65161

Fastening kit



type	
White	64575
Black	64670
Nickel	64671
Concrete	64672
Bronze	64673
Rosegold	65141

