


BPMLighting®
ALZIRA

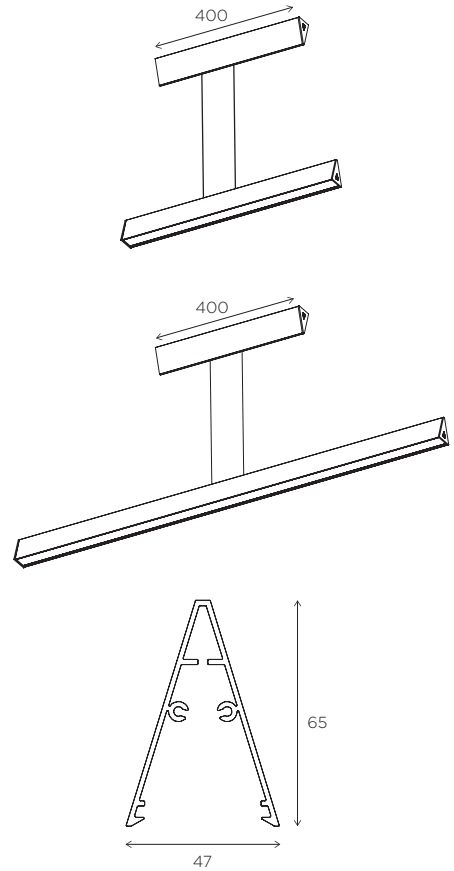


DESIGN YOUR PROJECT

LINES APPLICATION

Configuration | Configuración

Track - Carril, pag. 248

PHOTOMETRY - FOTOMETRÍA

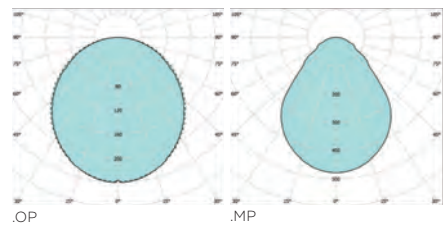


You can find all photometry data in our web.

Puedes encontrar todas las fotometrías en nuestra web.

ALZIRA

REF. 10169

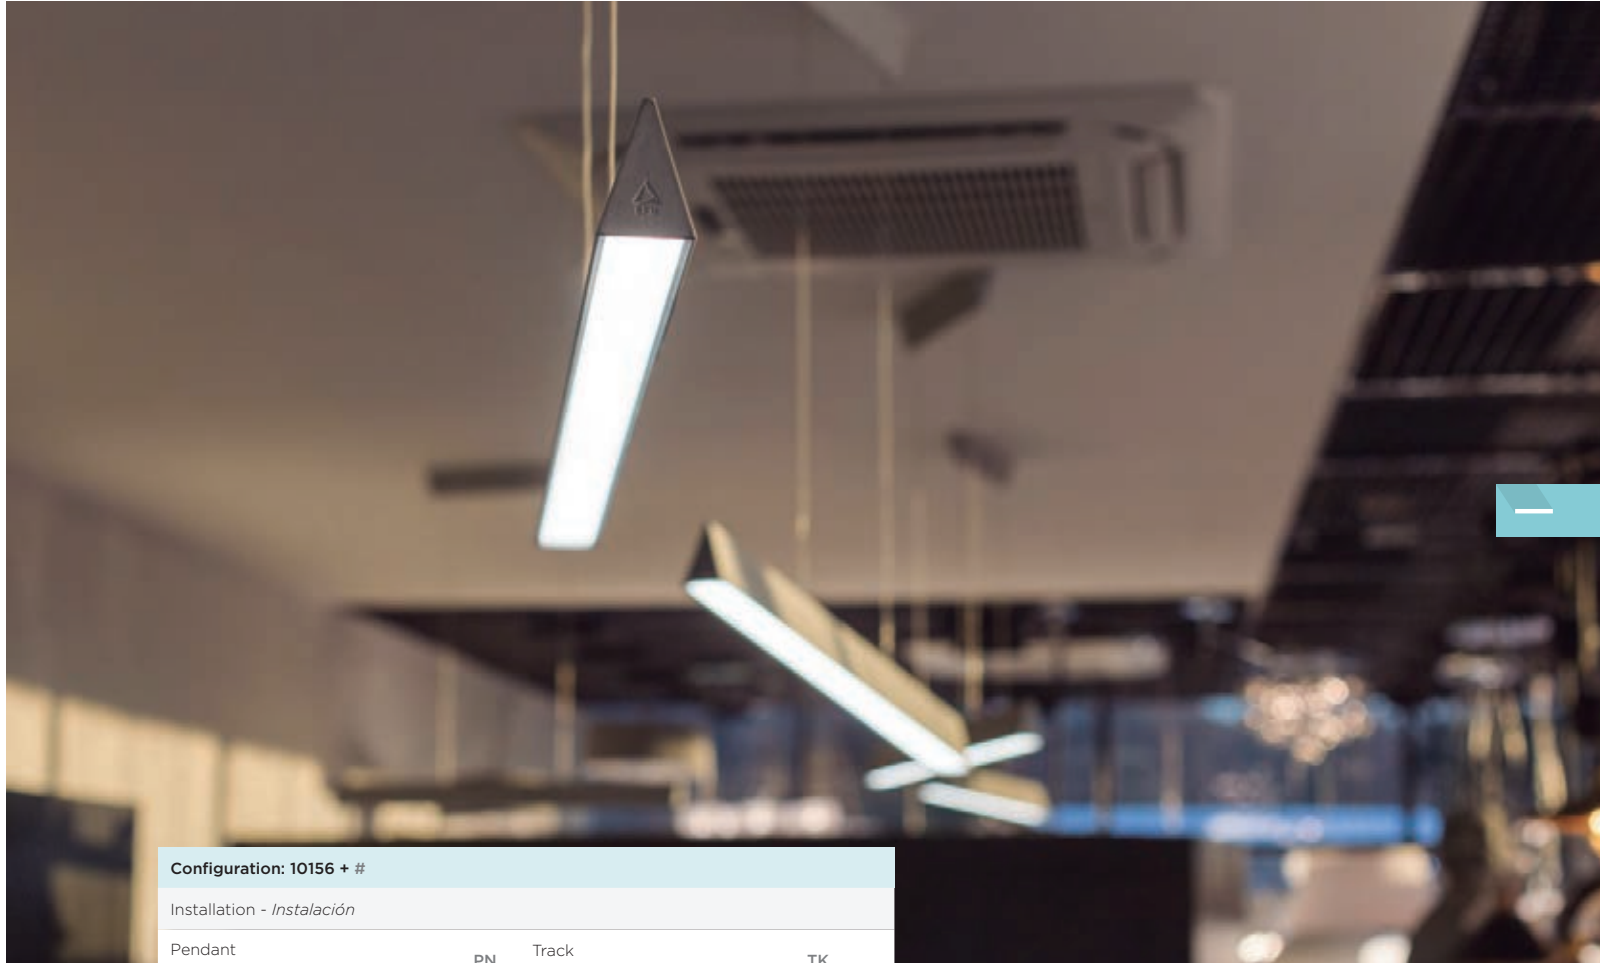

Configuration: 10156 + #

Installation - *Instalación*

Pendant <i>Colgante</i>	.PN	Track <i>Carril</i>	.TK
----------------------------	-----	------------------------	-----

Color finish - *Acabados*

White - <i>Blanco</i>	.W	Black - <i>Negro</i>	.BK
Anodized Gray - <i>Gris anodizado</i>	.AG		

Optic cover - *Difusor*

Opal	.OP	Microprismatic	.MP
------	-----	----------------	-----

Dynamic Light - *Luz Dinámica*

Dynamic White <i>Blanco dinámico / pag. 64</i>	.DW	RGB / <i>pag. 59</i>	.RGB
---	-----	----------------------	------

Color Temperature - *Temperatura de color*

2700K	.27K	3000K	.3K
4000K	.4K		

Dimmable options - *Opciones de regulación*

1..10V	.D1	DALI	.DA
Push - Pulsador	.PU		

REF.	L	Power	27K / 3K / 4K
10169.01	590 mm	12 W	1640 lm / 1740 lm / 1820 lm
10169.04	590 mm	24 W	3280 lm / 3460 lm / 3634 lm
10169.02	875 mm	18 W	2460 lm / 2610 lm / 2730 lm
10169.05	875 mm	36 W	4920 lm / 5190 lm / 5452 lm
10169.03	1155 mm	24 W	3280 lm / 3480 lm / 3640 lm
10169.06	1155 mm	47 W	6560 lm / 6920 lm / 7268 lm