

LINE RP

PROFILES

IP20




LINE RP

LED		230V	≈ 10W	> 2000lm	LNRP	A	10	.	.	9	.	..
			≈ 15W	> 3000lm	LNRP	A	15	.	.	9	.	..
			≈ 20W	> 4000lm	LNRP	A	20	.	.	9	.	..
			≈ 25W	> 5000lm	LNRP	A	25	.	.	9	.	..

McAdam C3 · >60.000 h. L80 / CRI >85

CORNER COMPLEMENT / COMPLEMENTO ESQUINA

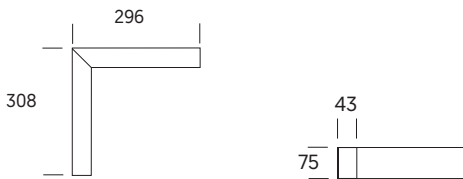

LED		230V	≈ 10W	> 2000lm	LNRP	A	10	.	.	9	Q	..
------------	--	------	-------	----------	------	----------	-----------	---	---	----------	----------	----

CONTROL

	N	No Dimmable	LNRP	A	..	N
	E	Dimmable 1-10V	LNRP	A	..	E
	D	Dimmable Dali	LNRP	A	..	D

LED COLOUR TEMPERATURE

	3	3000° K	LNRP	A	3
	4	4000° K	LNRP	A	4

BEAM ANGLE

	9	Expansive	LNRP	A	9	.	..
--	----------	-----------	------	---	----	---	---	---	----------	---	----

PARTS POSITIONS

	Q	Corner / Esquina	LNRP	A	Q	..
--	----------	------------------	------	---	----	---	---	---	---	----------	----

COLOURS

	WS	Satin White	LNRP	A	WS
	BS	Satin Black	LNRP	A	BS
	WG	Satin White + Gold	LNRP	A	WG*
	BG	Satin Black + Gold	LNRP	A	BG*

CONTROL

	N	No Dimmable	LNRP	A	..	N
	E	Dimmable 1-10V	LNRP	A	..	E
	D	Dimmable Dali	LNRP	A	..	D

LED COLOUR TEMPERATURE

	3	3000° K	LNRP	A	3
	4	4000° K	LNRP	A	4

BEAM ANGLE

	9	Expansive	LNRP	A	9	.	..
--	----------	-----------	------	---	----	---	---	---	----------	---	----

PARTS POSITIONS

	I	Individual	LNRP	A	I	..
	E	Initial	LNRP	A	E	..
	C	Central	LNRP	A	25	C	..
	F	Final	LNRP	A	F	..

COLOURS

	WS	Satin White	LNRP	A	WS
	BS	Satin Black	LNRP	A	BS
	WG	Satin White + Gold	LNRP	A	WG*
	BG	Satin Black + Gold	LNRP	A	BG*
	BW*	Satin Black + Satin White	LNRP	A	BW*
	WA*	Satin White + Blue	LNRP	A	WA*
	BR*	Satin White + Orange	LNRP	A	BR*

DOWNLOAD COMPLETE TECHNICAL DATA AND FILES ON:

ONOKLIGHTING.COM/EN/LINE-RP

INFORMATION ABOUT PACKING SEE PAGE 324

	BW*	Satin Black + Satin White	LNRP	A	BW*
	WA*	Satin White + Blue	LNRP	A	WA*
	BR*	Satin White + Orange	LNRP	A	BR*

*Optional, please consult

ES

Perfil empotrado de extrusión de aluminio con difusor de metacrilato rehundido para dar efecto de no llevar marco exterior. Especialmente diseñado para evitar deslumbramientos.

EN

Recessed aluminium extruded profile with deep-set methacrylate diffuser, offering a frameless effect. Special anti-glare design.

FR

Profilé encastré en extrusion d'aluminium à ossature cachée avec diffuseur méthacrylate anti-éblouissement en retrait.

