


Lafina

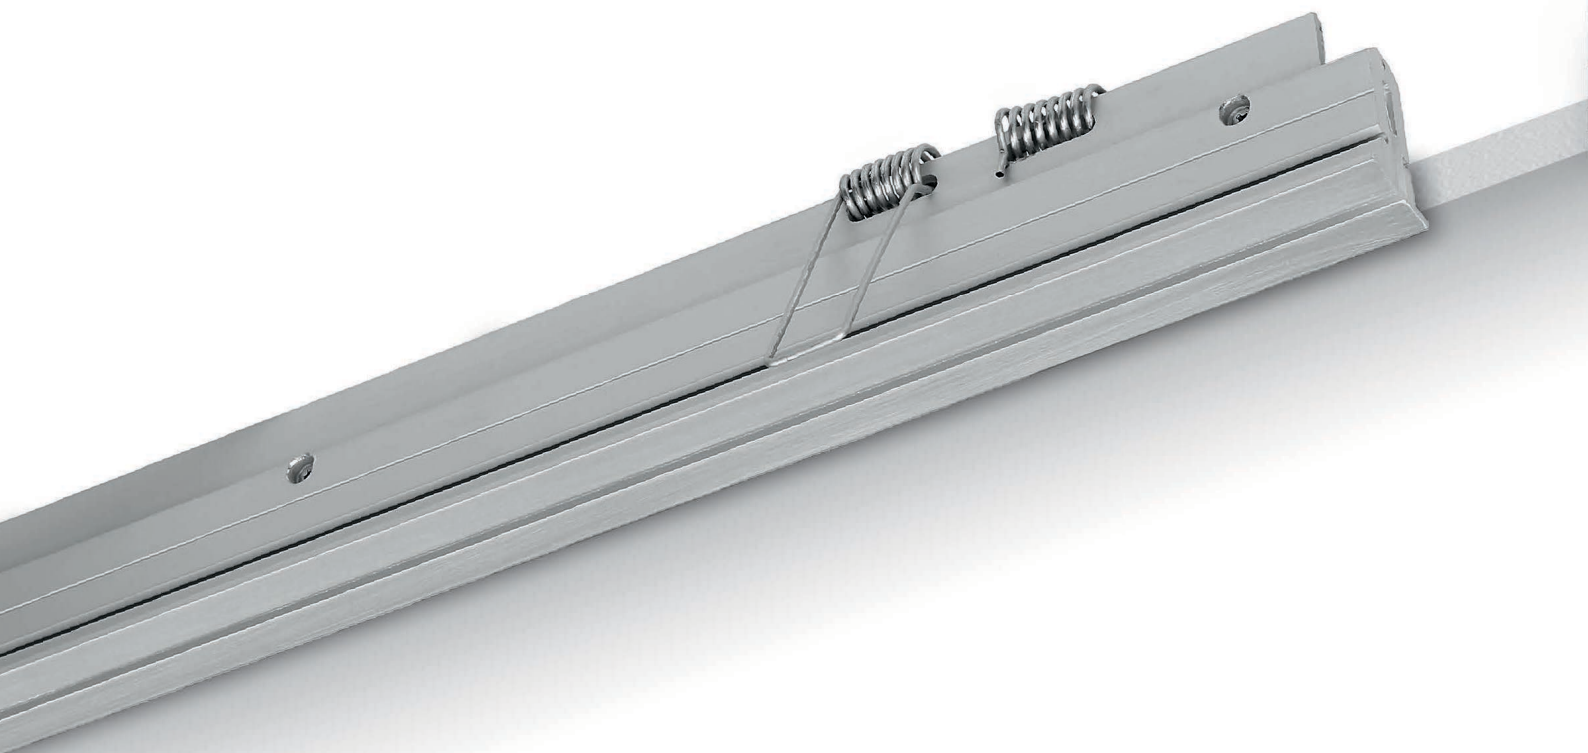

A light profile whose distinguishing feature is an **ultra-minimalist light** consisting in a **thin line of just 7 millimetres**. The elegant attractive light cuts decorate the walls and ceilings as a perfect representation of aesthetics and style. Available in the frameless version or with exposed flange.

Illuminated protection


UV-resistant opaline polycarbonate diffuser

Passive heat dissipation

Ultra-thin extruded aluminium casing with an extremely reduced depth




Lafina | Linear profiles | topLED 1.7 W 24 V



type		colour			optic	
Anod. AL	CRI 80	97379	2700 K	135 lm	M	Diff. 00
			3000 K	140 lm	W	
			4000 K	145 lm	N	

89408	89487	99332	Cables
ON/OFF 1 - 2 art.	ON/OFF 1 - 8 art.	1-10V 1 - 88 art.	815


Lafina | Linear profiles | topLED 3.3 W 24 V



type		colour			optic	
Anod. AL	CRI 80	97380	2700 K	270 lm	M	Diff. 00
			3000 K	280 lm	W	
			4000 K	290 lm	N	

89408	89487	99332	Cables
ON/OFF 1 art.	ON/OFF 1 - 4 art.	1-10V 1 - 45 art.	815


Lafina | Linear profiles | topLED 6.6 W 24 V



type		colour			optic	
Anod. AL	CRI 80	97381	2700 K	540 lm	M	Diff. 00
			3000 K	560 lm	W	
			4000 K	580 lm	N	

89487	84829	99332	Cables
ON/OFF 1 - 2 art.	ON/OFF 1 - 3 art.	1-10V 1 - 22 art.	815

Lafina_F | Linear profiles | topLED 1.7 W 24 V




type		colour			optic	
Anod. Al.	CRI 80	96617	2700 K	135 lm	M	Diff. 00
			3000 K	140 lm	W	
			4000 K	145 lm	N	




89408	89487	99332	Cables
ON/OFF 1 - 2 art.	ON/OFF 1 - 8 art.	1-10V 1 - 88 art.	815

Lafina_F | Linear profiles | topLED 3.3 W 24 V




type		colour			optic	
Anod. Al.	CRI 80	96618	2700 K	270 lm	M	Diff. 00
			3000 K	280 lm	W	
			4000 K	290 lm	N	



89408	89487	99332	Cables
ON/OFF 1 art.	ON/OFF 1 - 4 art.	1-10V 1 - 45 art.	815

Lafina_F | Linear profiles | topLED 6.6 W 24 V




type		colour			optic	
Anod. Al.	CRI 80	96619	2700 K	540 lm	M	Diff. 00
			3000 K	560 lm	W	
			4000 K	580 lm	N	



89487	84829	99332	Cables
ON/OFF 1 - 2 art.	ON/OFF 1 - 3 art.	1-10V 1 - 22 art.	815

Lafina_F | Outer-casings



type	suitable for		
Anod. Al.	96617	250 mm	98445
Anod. Al.	96618	500 mm	98446
Anod. Al.	96619	1000 mm	98447

Aluminium profile for trimless installation; recessed mounting for plasterboard ceilings.