





# MIDNA

- Luminaire for installation on wall – surface mounted.
- Configuration: polycarbonate structure and die-cast aluminium cover and base, EN AB-47100 alloy (low copper content)
- Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65
- In compliance with EN 60598-1 standards
- Class of insulation: I
- Installation: wiring through two cable holders (8mm<math>\varnothing</math><math><13\text{mm}</math> cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder.

## EU Regulation 874/2012 - Illumination equipment energy classes

	<b>LED VERSION:</b> Class A/A+/A++ Luminaire supplied with integrated LED modules that cannot be replaced
	
	
	<b>FLUORESCENT VERSION:</b> Class A TC-DEL/G24q-2



Wall fitting




The fitting is equipped with 2 cable input.





Protection against impact.  
IK 09 - 10,00 joule

## Midna / Unidirectional





**529001** **A**  
TC-DEL 18W G24q-2  
Electronic ballast

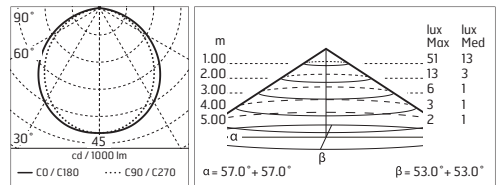

## Midna Mid-Power LED / Unidirectional




**529003** **A A+ A++**  
NATURAL WHITE 4000K  
MID-POWER LEDs  
8,8W/220-240V  
Total power 12W  
Lm LED 1258  $\approx$  Lm OUTPUT 602  
CRI>80  
Integral electronic power supply


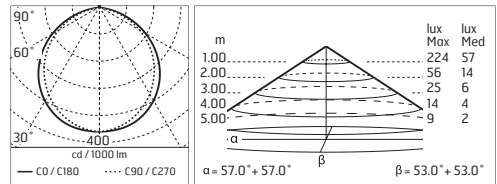


**529004** **A A+ A++**  
WARM WHITE 3000K  
MID-POWER LEDs  
8,8W/220-240V  
Total power 12W  
Lm LED 1198  $\approx$  Lm OUTPUT 573  
CRI>80  
Integral electronic power supply



## Midna / Bidirectional



**529005** **A**  
TC-DEL 18W G24q-2  
Electronic ballast

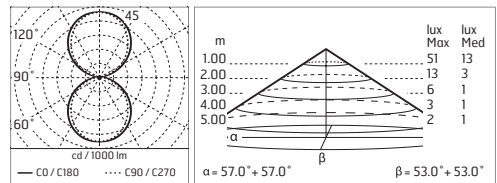



## Midna Mid-Power LED / Bidirectional



### 529007 A A+ A++

NATURAL WHITE 4000K  
MID-POWER LEDs  
17,6W/220-240V  
Total power 18W  
Lm LED 2x1258 ≠ Lm OUTPUT 2x602  
CRI>80

Integral electronic power supply



### 529008 A A+ A++

WARM WHITE 3000K  
MID-POWER LEDs  
17,6W/220-240V  
Total power 18W  
Lm LED 2x1198 ≠ Lm OUTPUT 2x573  
CRI>80


Integral electronic power supply



## Accessories: Midna

### 237

SPD; (SURGE PROTECTION DEVICE) 275Vac  
MAXIMUM DISCHARGE CURRENT 10kA (8/20 $\mu$ s)  
MAXIMUM OPERATING CURRENT 5A  
SUITABLE FOR SERIES CONNECTION - IP66



acc. code	237
529001	
529003	●
529004	●
529005	
529007	●
529008	●