


Mini-Outline

Complete range (recessed, surface or suspension)

A complete range answers all installations' range.
Mini-Outline is available: recessed, surface or
suspension installation.

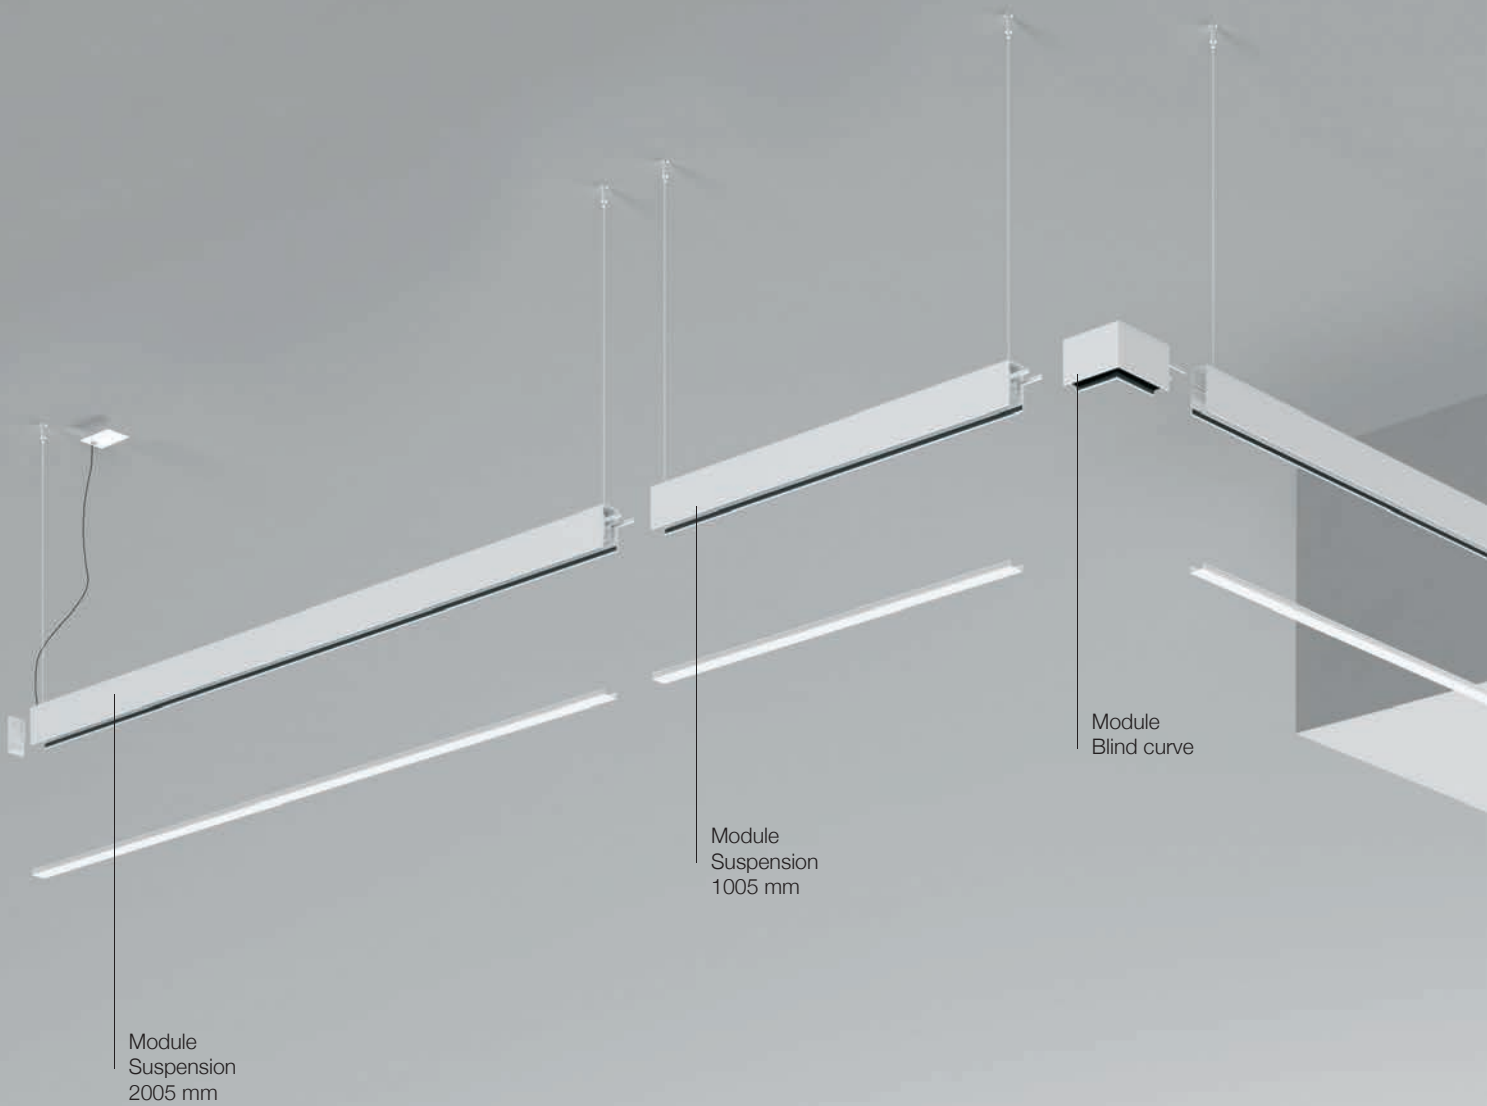

On measure lighting

We can provide special length modules to satisfy all the specific project needs.
For each module the cuts may be required both linear (10 cm intervals) or with variable angle.


Suspension



Ceiling light



Recessed



Visual comfort

The linear structure defines the fixture, provides two lateral items' integration, coated in a special "optical black" finish, ensuring a perfect luminous control. The fixture's diffuser is set back, inside the case to emphasize user's visual comfort. Attention to details defines our market approach.


Asymmetric emission

A special cover fitted on the diffusing screen of the recessed profile allows to direct the light beam towards the walls, thus creating an asymmetric distribution that uniformly wraps the surface, while reducing contrasts and enhancing the width of the rooms.

Module
Ceiling light
2005 mm

Corner recessed
module

Linear recessed
module

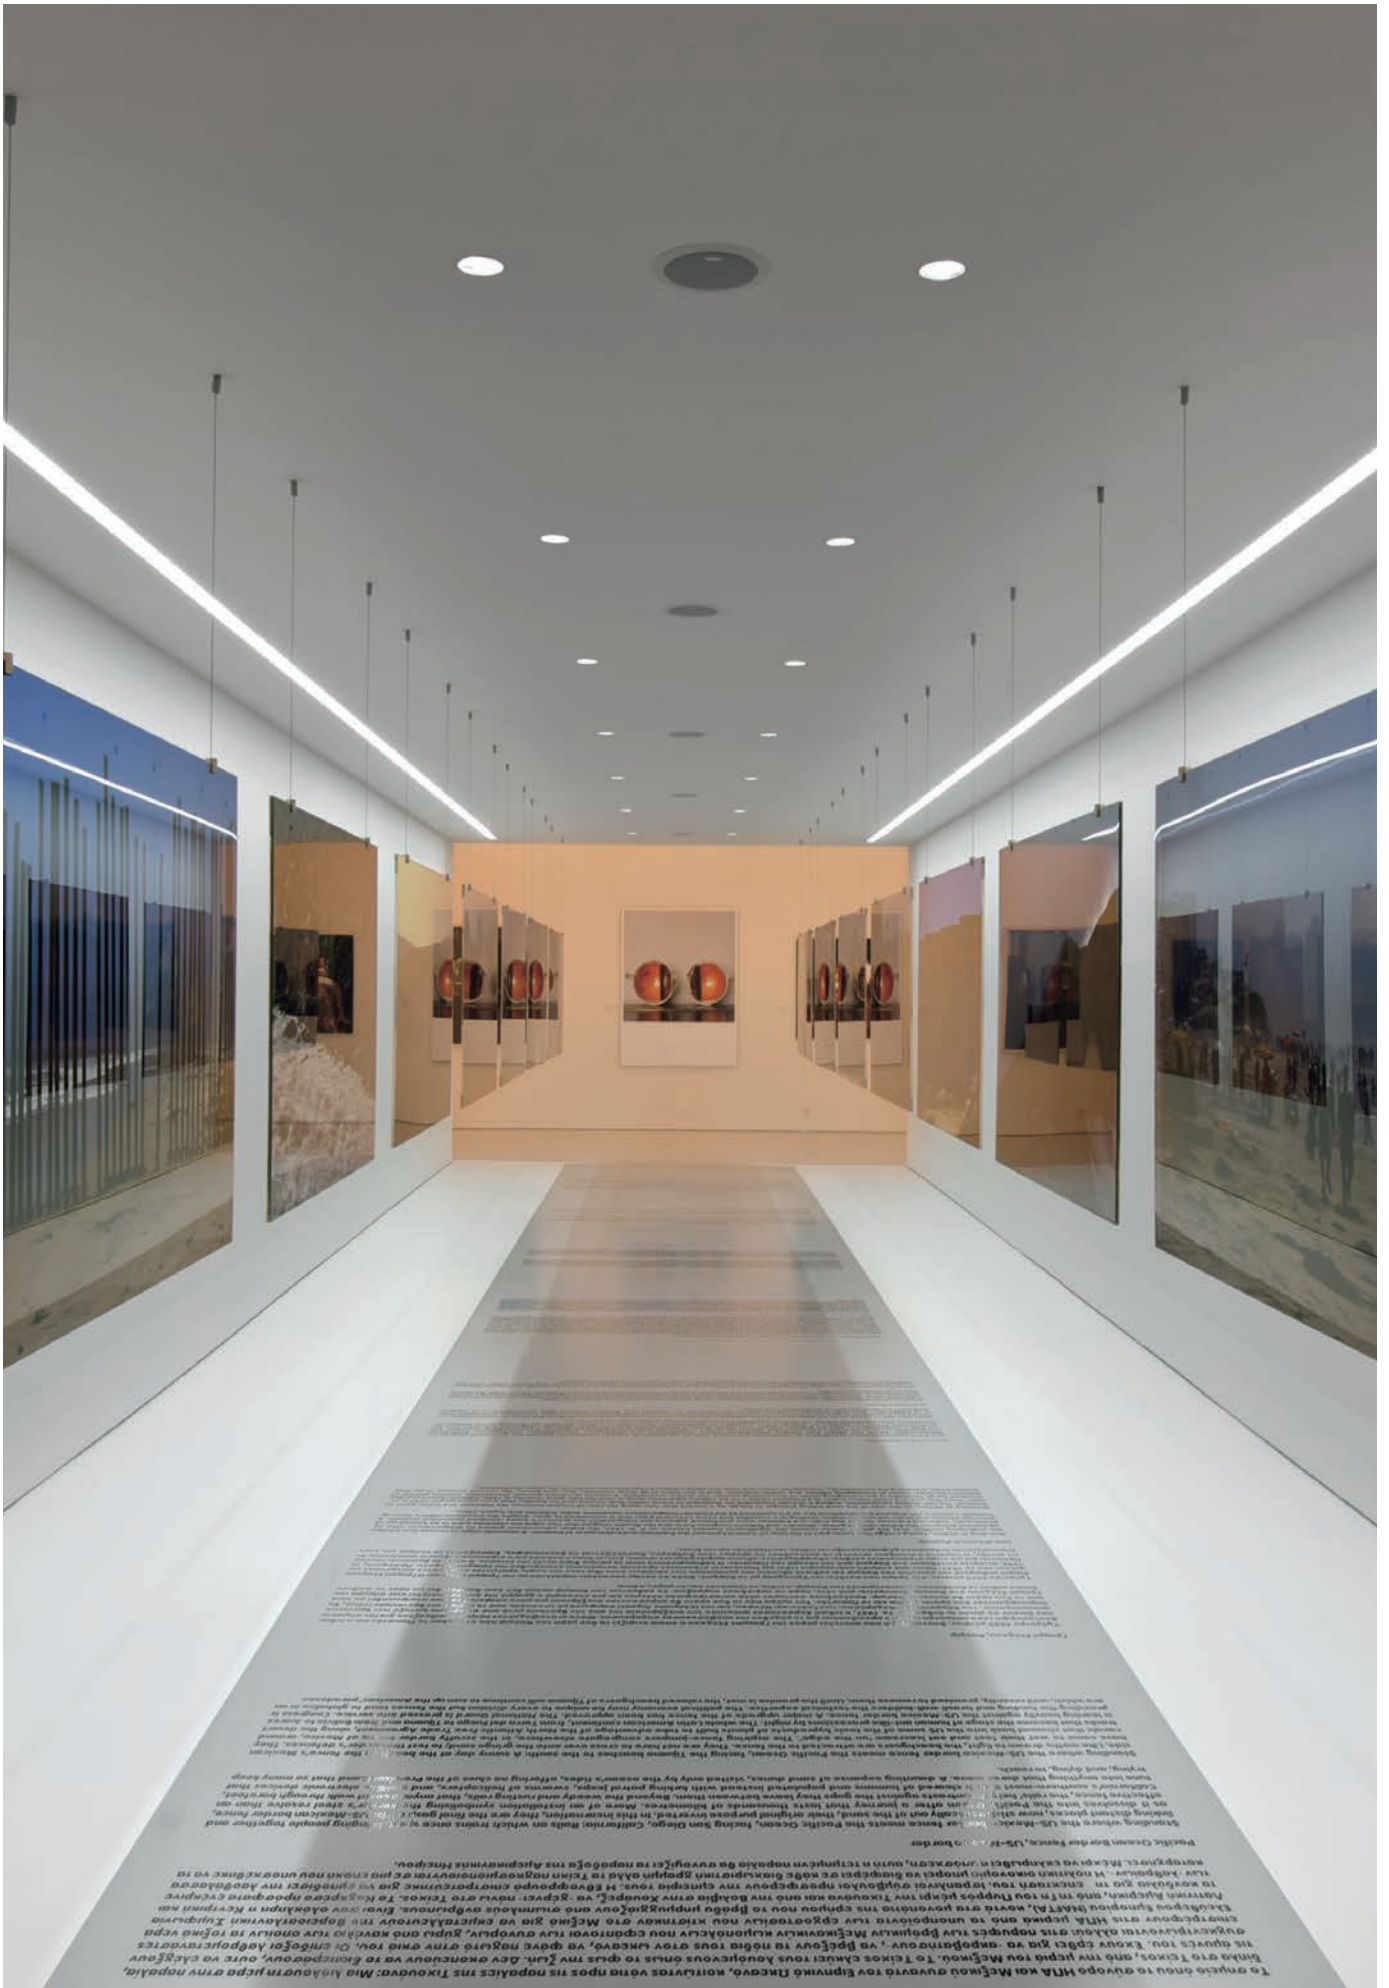



The simplicity of this system allows you to add easily in any context.

A diffused light combined with a compact profile section is the ideal solution to enhance passageway areas and meeting rooms or to give a contemporary touch to residential settings and retail spaces.



Mini-Outline_M

Surface and suspension modules


A complete system fitted to be installed on the surface or suspended.


Simply select a starting “master” module, either a suspension or a surface version; the configuration can then be completed with “slave” modules, which are available in three standard lengths: 1005 / 1505 / 2005mm.

Anodized or painted extruded aluminum profile with sealing plugs. Opaline PMMA diffuser.

High performance topLED wiring. Drivers included.

End caps, junction kit and suspension cables are available as accessories.

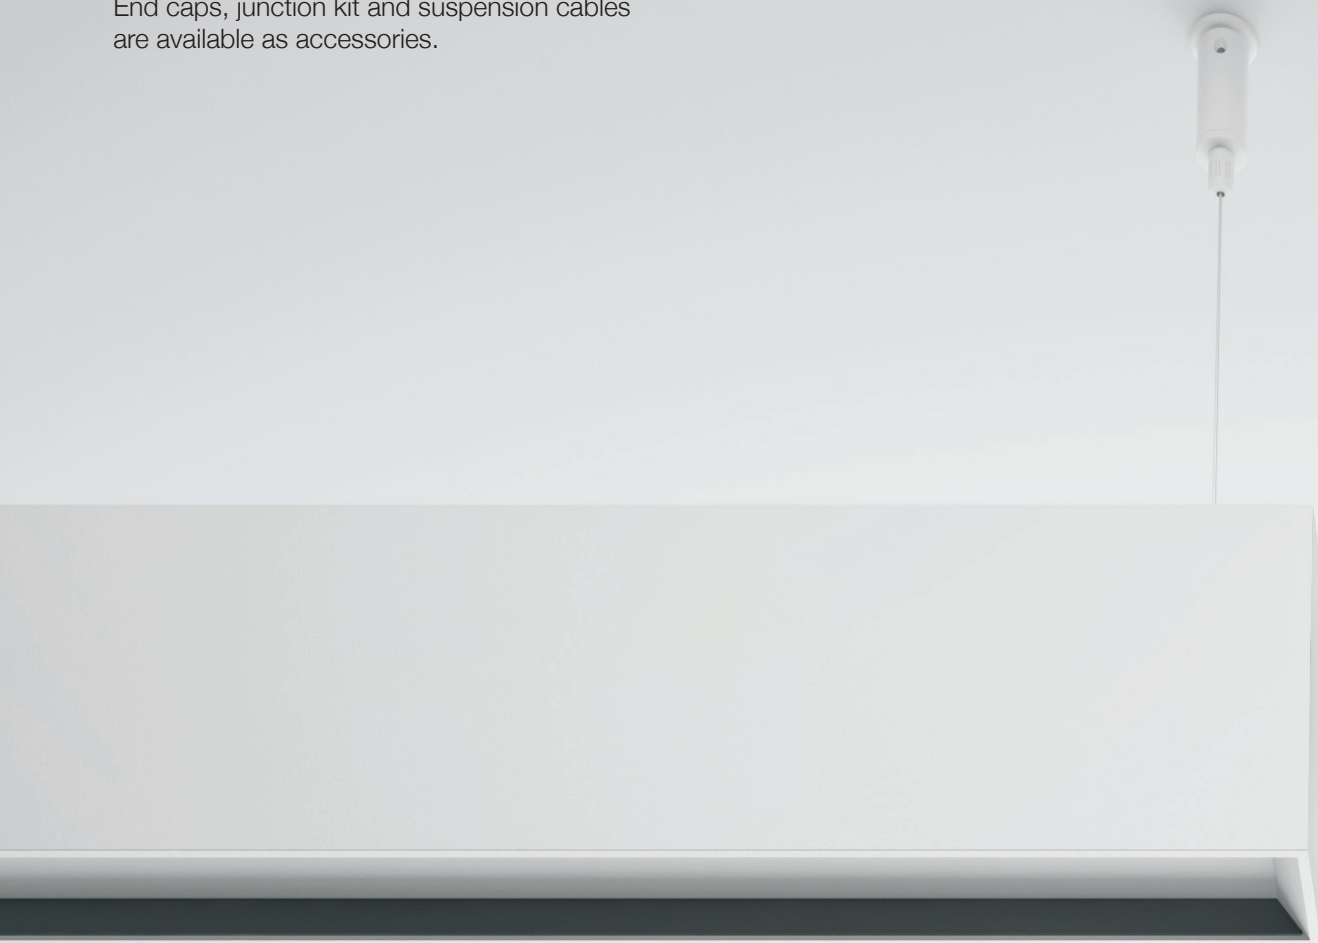


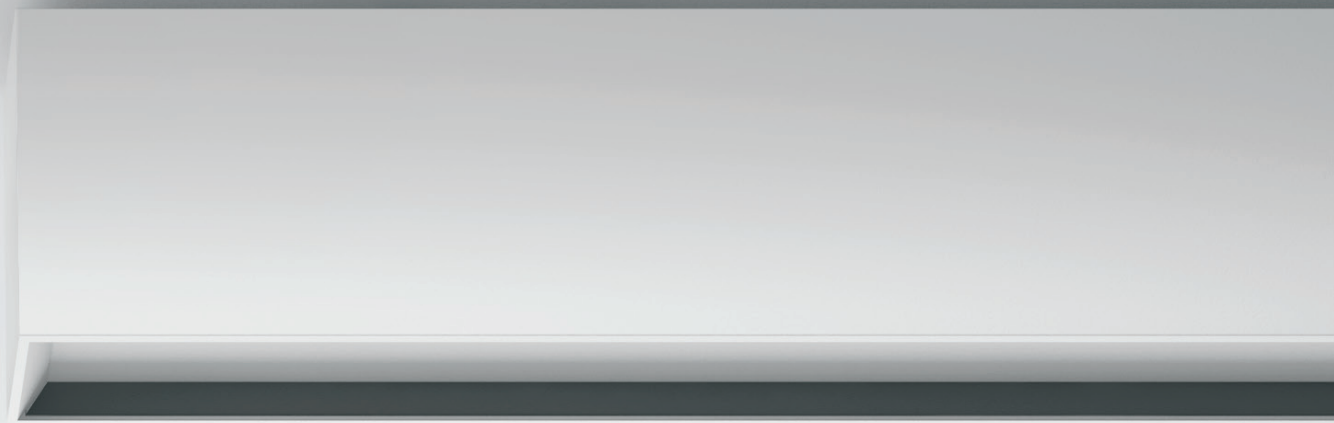

Complete element version

▶ 240 / 306

Mini-Outline_MP MASTER | Lines | 198-264 V | topLED 21,5 W 700 mA



ON / OFF



| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 64765 | 3000 K 3030 lm W | diffused 00 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 64766 | 3000 K 3030 lm W | diffused 00 |
| | | |

To be completed with dedicated installation accessories

Mini-Outline_MS MASTER | Lines | 198-264 V | topLED 21,5 W 700 mA



ON / OFF


| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 64767 | 3000 K 3030 lm W | diffused 00 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 64768 | 3000 K 3030 lm W | diffused 00 |
| | | |

To be completed with dedicated installation accessories

Mini-Outline_MPS SLAVE | Lines | 100-264 V | topLED 14,5 W 500 mA



ON / OFF


| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 64769 | 3000 K 2020 lm W | diffused 00 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 64772 | 3000 K 2020 lm W | diffused 00 |
| | | |

To be completed with dedicated installation accessories

Mini-Outline_MPS SLAVE | Lines | 198-264 V | topLED 21,5 W 700 mA



ON / OFF


| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 64770 | 3000 K 3030 lm W | diffused 00 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 64773 | 3000 K 3030 lm W | diffused 00 |
| | | |

To be completed with dedicated installation accessories

Mini-Outline_MPS SLAVE | Lines | 198-264 V | topLED 29 W 1050 mA



ON / OFF

type

White CRI 80 **64771**

colour

3000 K 4040 lm **W**

optics

diffused **00**

DIMMABLE

type

White CRI 80 **64774**

colour


3000 K 4040 lm **W**

optics

diffused **00**

To be completed with dedicated installation accessories

Blind corner



type L mm

White 140 **64775**

ACCESSORIES AND LAYOUT


Maximum length for single supply 50 mt

Ø 16



64776
Suspension
L 2000 mm
1 pc

64777
End caps
2 pcs

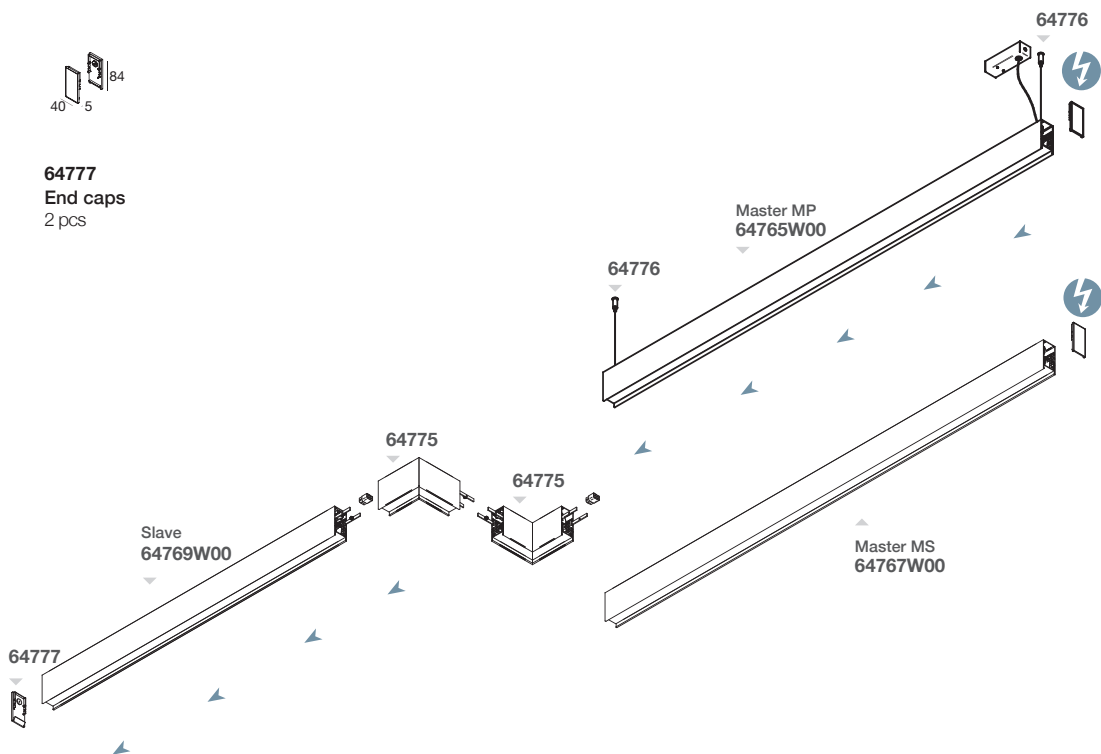





Mini-Outline_MF

Recessed modules

The modular versions for recessed housing allow to create continuous light lines with an extremely low impact. The series includes two lighting curves for ceiling/wall and ceiling/ceiling mounting. A special module with asymmetric emission completes the range and gives the possibility to accurately manage the lighting of vertical surfaces.







Complete element version

▶ 240

Mini-Outline_MF | Lines | 100-264 V | topLED 14,5 W 500 mA

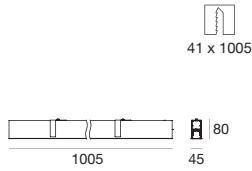

ON / OFF



| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59464 | 3000 K 2020 lm W | diffused 00 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59460 | 3000 K 2020 lm W | diffused 00 |
| | | |

To be completed with dedicated installation accessories

Mini-Outline_MF | Lines | 198-264 V | topLED 21,5 W 700 mA

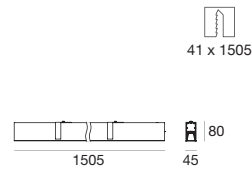

ON / OFF


| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59394 | 3000 K 3030 lm W | diffused 00 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59461 | 3000 K 3030 lm W | diffused 00 |
| | | |

To be completed with dedicated installation accessories

Mini-Outline_MF | Lines | 198-264 V | topLED 29 W 1050 mA

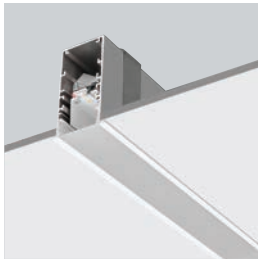

ON / OFF


| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59474 | 3000 K 4040 lm W | diffused 00 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59462 | 3000 K 4040 lm W | diffused 00 |
| | | |

To be completed with dedicated installation accessories

Mini-Outline_MF vertical corner | Lines | 100-264 V | topLED 14,5 W 500 mA

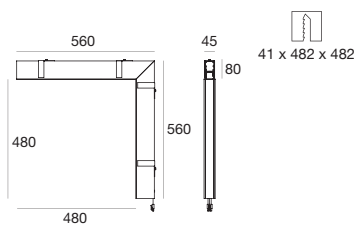

ON / OFF



| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59494 | 3000 K 2020 lm W | diffused 00 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59463 | 3000 K 2020 lm W | diffused 00 |
| | | |

To be completed with dedicated installation accessories

Mini-Outline_MF left corner | Lines | 100-264 V | topLED 14,5 W 500 mA

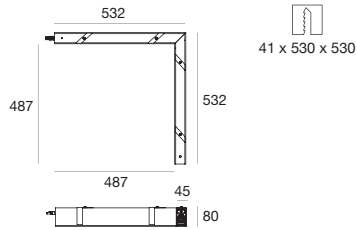

ON / OFF

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59094 | 3000 K 2020 lm W | diffused 00 |



DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59466 | 3000 K 2020 lm W | diffused 00 |
| | | |



To be completed with dedicated installation accessories

Mini-Outline_MF right corner | Lines | 100-264 V | topLED 14,5 W 500 mA

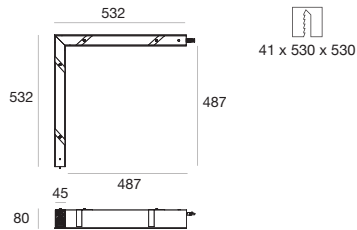

ON / OFF

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59484 | 3000 K 2020 lm W | diffused 00 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|--------------------|
| White CRI 80 59467 | 3000 K 2020 lm W | diffused 00 |
| | | |



To be completed with dedicated installation accessories

ACCESSORIES AND LAYOUT


Maximum length for single supply 50 mt




62180
Junction
2 pcs





62160
End caps + 3
poles connector
2 pcs



62161
End caps + 5
poles connector
2 pcs

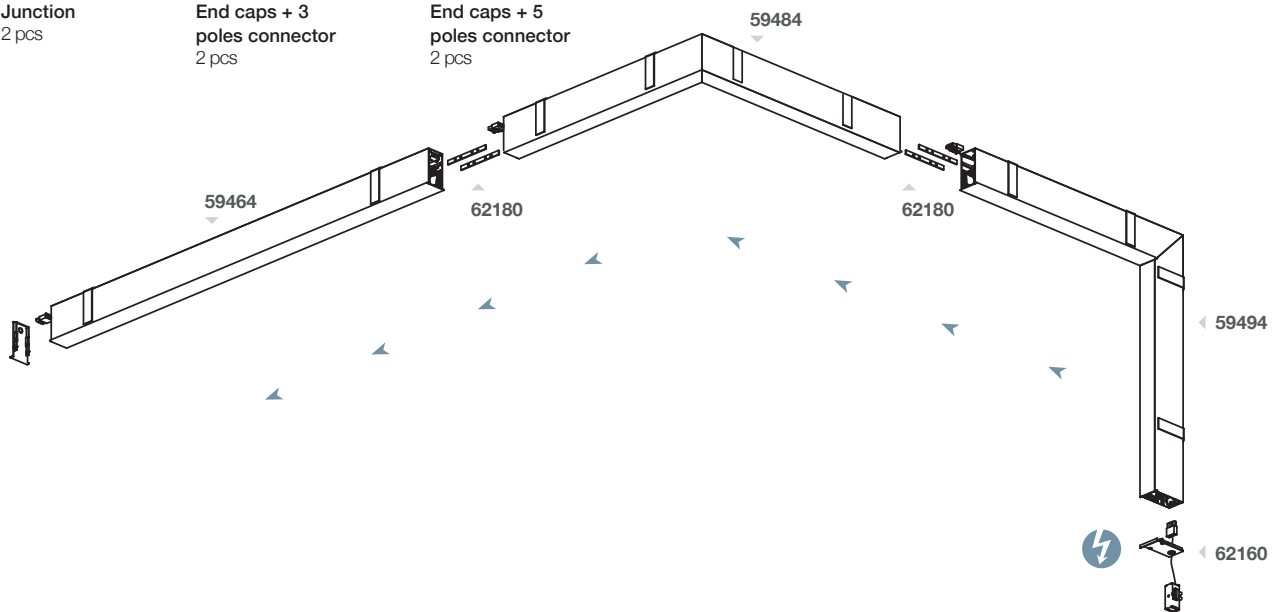

Mini-Outline_MFY | Lines | 100-264 V | topLED 14,5 W 350 mA

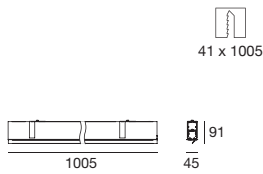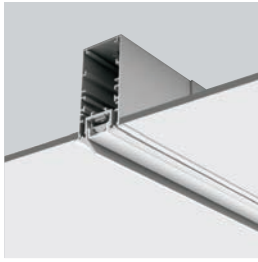

Asymmetric

To be completed with dedicated installation accessories



ON / OFF

| type | colour | optics |
|---------------------------|-------------------------|-----------------|
| White CRI 80 64004 | 3000 K 2020 lm W | Asym. 07 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|-----------------|
| White CRI 80 64001 | 3000 K 2020 lm W | Asym. 07 |
| | | |

Mini-Outline_MFY | Lines | 198-264 V | topLED 21,5 W 500 mA

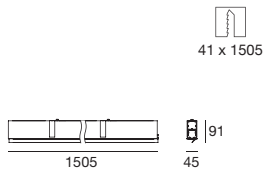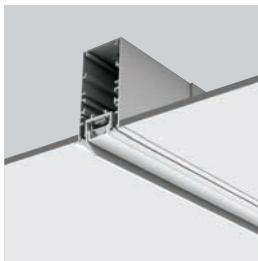

Asymmetric

To be completed with dedicated installation accessories



ON / OFF

| type | colour | optics |
|---------------------------|-------------------------|-----------------|
| White CRI 80 64014 | 3000 K 3030 lm W | Asym. 07 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|-----------------|
| White CRI 80 64002 | 3000 K 3030 lm W | Asym. 07 |
| | | |

Mini-Outline_MFY | Lines | 198-264 V | topLED 29 W 700 mA

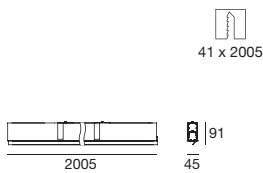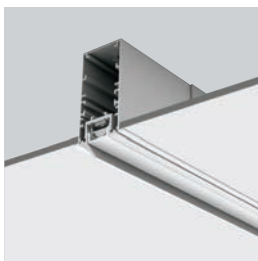

Asymmetric

To be completed with dedicated installation accessories

ON / OFF

| type | colour | optics |
|---------------------------|-------------------------|-----------------|
| White CRI 80 64024 | 3000 K 4040 lm W | Asym. 07 |

DIMMABLE

| type | colour | optics |
|---------------------------|-------------------------|-----------------|
| White CRI 80 64003 | 3000 K 4040 lm W | Asym. 07 |
| | | |

