


NOD

suspended

xal.com/nod

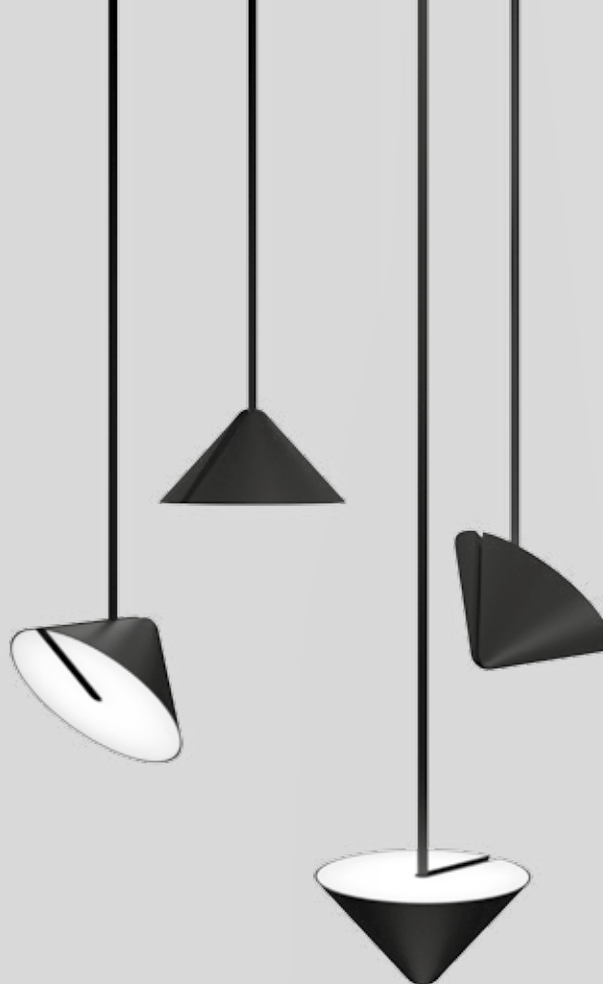

Quickinfo

GENERAL

suspended (rod)
IP20

LED

Mid-power LED
up to 95lm/W
2700K, 3000K
CRI ≥ 90
Binning initial ≤ 3 MacAdam

ESTIMATED LED LIFETIME

L80 / 50000h

OPTICAL

direct light 100%
PMMA cover opal

ELECTRICAL

non DIM

PHYSICAL


soft touch coated surface
330° turnable, 180° tiltable

Description


DE Kegelförmiger Leuchtenkörper aus Kunststoff; Leuchtenkörper 330° dreh- und 180° schwenkbar gelagert; elegante Hängeleuchte mit schwarzer Soft-Touch-Oberfläche; mit kürzbarer Pendelrohrabhangung, wahlweise 1500 mm oder 2500 mm, Einspeiseleitung in Pendelrohr; optional mit Pendelrohrabhangung 1500 mm und 3 Phasen Adapter fur werkzeugloses Einsetzen bzw. Verschieben in verschiedenen 3 Phasen Stromschienen; absolut homogen ausgeleuchtete, satinierte PMMA-Abdeckung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Binning initial ≤ 3 MacAdam; lieferbar in den Lichtfarben 2700 K und 3000 K; CRI ≥ 90; min. 80 % des Lichtstromes nach 50000 h Lebensdauer; Schutzart IP20; SK I; inkl. Konverter, nicht dimmbar

EN Cone-shaped luminaire housing made of plastic; luminaire housing 330° rotatable and 180° tiltable pivot-mounted; elegant suspended luminaire with black soft-touch surface; with adjustable pendant rod mounting, either 1500 mm or 2500 mm, feed in rod; optionally with pendant rod mounting 1500 mm and 3 phase adapter for toolless installation or movement on various 3 phase power tracks; completely homogeneously illuminated, satinised PMMA cover; energy-efficient LEDs with very good colour rendering; binning initial ≤ 3 MacAdam; available in the light colours 2700 K and 3000 K; CRI ≥ 90; min. 80 % of the luminous flux after 50000 hours; protection class IP20; PC I; incl. converter, non dimmable

Features



330° rotatable




180° tiltable



available with
3-phase adapter

Standard configuration

SUSPENSION 
rod 1500 mm 5


COLOUR TEMPERATURE 
2700 K 4
3000 K 5

CONTROL
non DIM 1

MATERIAL COLOUR
black 8

8

Extended configuration


SUSPENSION 
rod 2500 mm 6
3-phase adapter 1500 mm 2



Options on request

CONTROL
phase-cut DIM




NOD suspended



SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10W	2700K	890lm	0 7 2 - 6  2 2  1 8 0
	3000K	960lm	

LIGHT DISTRIBUTION

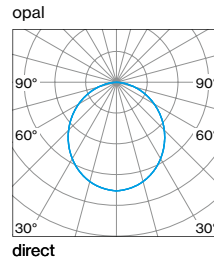

Inspiration

Kastner & Öhler
Graz, Austria

PRODUCT
NOD suspended



