

Outline_MF

Linear light

Linear lighting elements with unlimited composition solutions to create continuous lines and corners. Anodized or coated extruded aluminium casing and polycarbonate diffusers. Wiring included with LED source.




Complete element version

▶ 236

Outline_MF

New version

The whole Outline range has been upgraded with new lighting units and new lengths. Opaline screens matching the profiles are available with lengths up to 3 metres, this highlights the perception of a seamless lighting line that can outline the space with a diffused and performing emission.

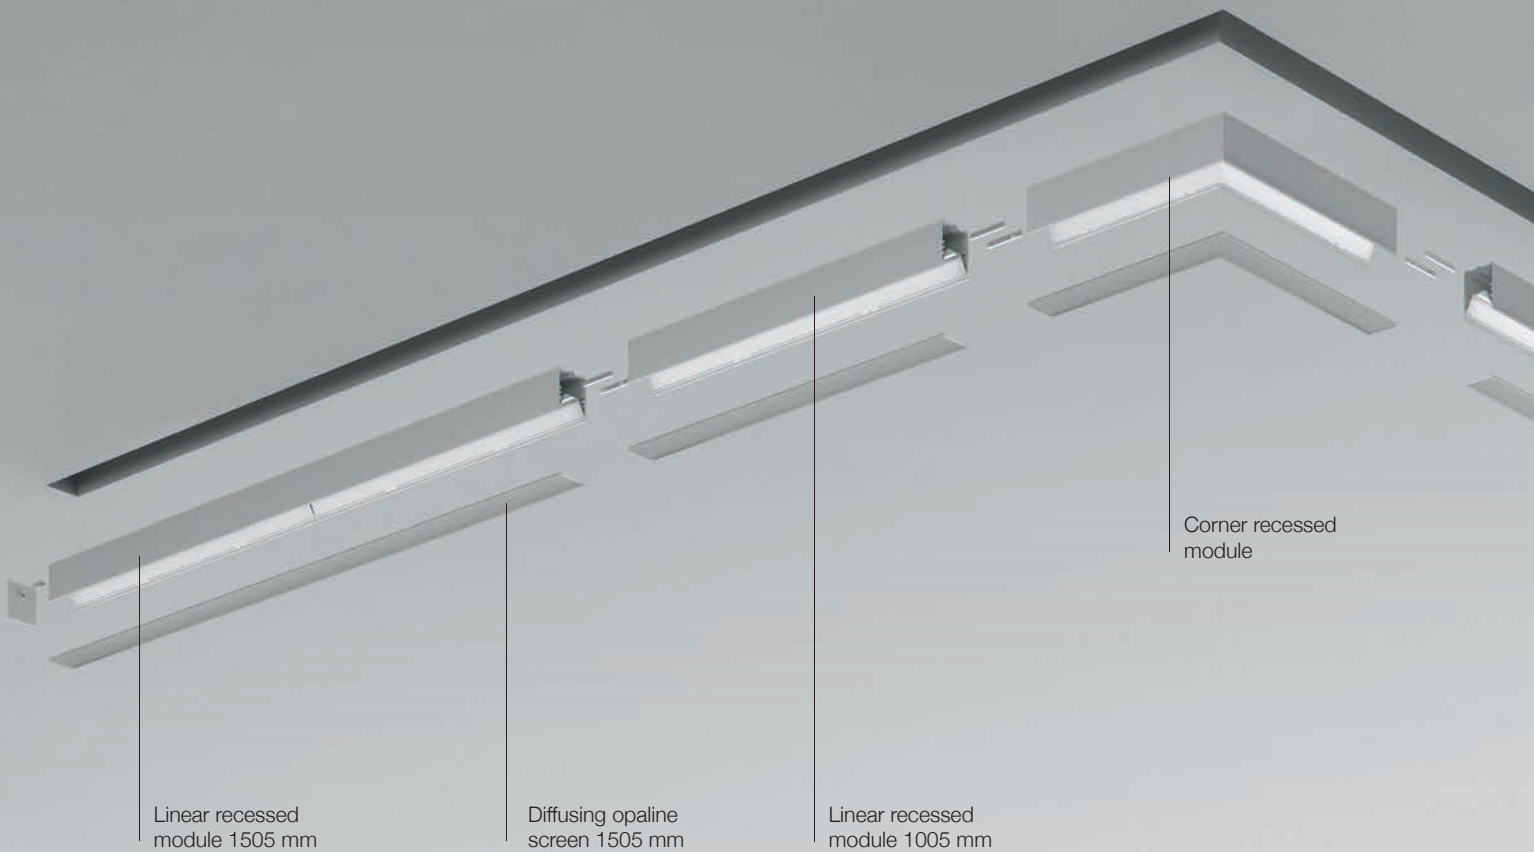

On measure lighting


We can provide special length modules to satisfy all the specific project needs. For each module the cuts may be required both linear (10 cm intervals) or with variable angle.



Linear recessed
module 1505 mm

Diffusing opaline
screen 2005 mm

Outline_MF | Lines | 198-264 V | topLED 20 W 500 mA



To be completed with dedicated installation accessories



ON / OFF

type	colour	optics
White CRI 80 60100	3000 K 2885 lm W	diffused 00
	4000 K 3145 lm N	

DIMMABLE

type	colour	optics
White CRI 80 60101	3000 K 2885 lm W	diffused 00
DALI Push ON/OFF DIM	4000 K 3145 lm N	

Outline_MF | Lines | 198-264 V | topLED 28 W 700 mA

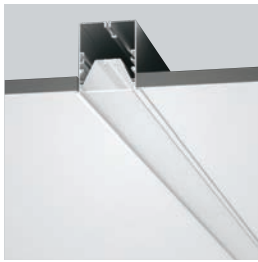

To be completed with dedicated installation accessories


ON / OFF

type	colour	optics
White CRI 80 60102	3000 K 4210 lm W	diffused 00
	4000 K 4600 lm N	

DIMMABLE

type	colour	optics
White CRI 80 60103	3000 K 4210 lm W	diffused 00
DALI Push ON/OFF DIM	4000 K 4600 lm N	

Outline_MF | Lines | 198-264 V | topLED 42,5 W 1050 mA



To be completed with dedicated installation accessories


ON / OFF

type	colour	optics
White CRI 80 60110	3000 K 5770 lm W	diffused 00
	4000 K 6290 lm N	

DIMMABLE

type	colour	optics
White CRI 80 60111	3000 K 5770 lm W	diffused 00
DALI Push ON/OFF DIM	4000 K 6290 lm N	

Outline_MF left corner | Lines | 198-264 V | topLED 20 W 500 mA

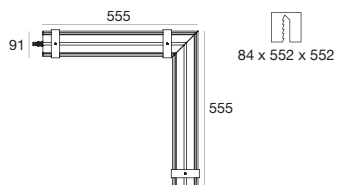

To be completed with dedicated installation accessories


ON / OFF

type	colour	optics
White CRI 80 60120	3000 K 2885 lm W	diffused 00
	4000 K 3145 lm N	

DIMMABLE

type	colour	optics
White CRI 80 60121	3000 K 2885 lm W	diffused 00
DALI Push ON/OFF DIM	4000 K 3145 lm N	

Outline_MF right corner | Lines | 198-264 V | topLED 20 W 500 mA

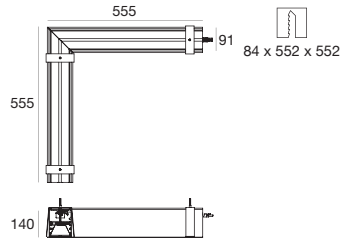**ON / OFF**

type

White CRI 80 **60112**

colour

3000 K	2885 lm	W
4000 K	3145 lm	N

optics

diffused **00****DIMMABLE**

type

White CRI 80 **60113**

colour

3000 K	2885 lm	W
4000 K	3145 lm	N





optics

diffused **00**

To be completed with dedicated installation accessories

ACCESSORIES AND LAYOUT

Maximum length for single supply 50 mt


60164
End caps
2 pcs

63199
Junction
2 pcs

60127
Electrical
connector
(on-off)

60128
Electrical
connector
(DALI)

**Straight Opal
Diffusers**

L mm	Code
1005	60107
1505	60108
2005	60109
2510	60117
3010	60118


**Angular Opal
Diffusers**

L mm	Code
555	60119

