


# Quara65

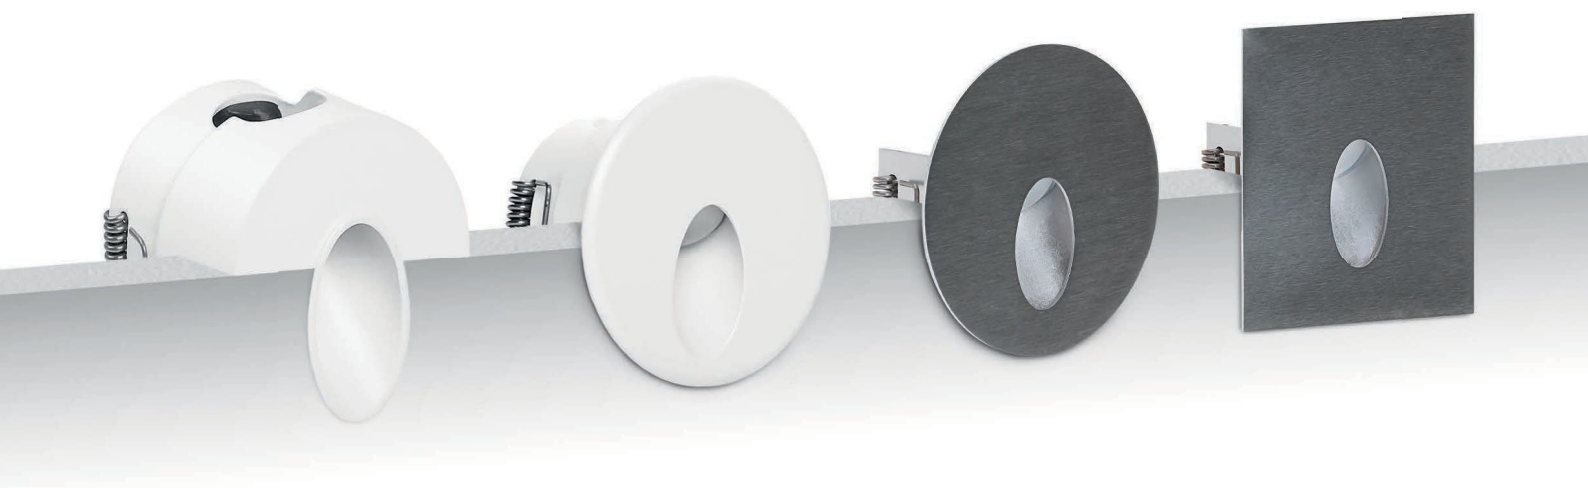

An oval path-marker recessed wall light in the shape of a **drop of light** carved out of the square or round casing, made of aluminium or steel. Installed close to the ground, it casts **light circles** onto the surface below while decorating outdoor stairs and flooring details in the dark with style.

**Passive heat dissipation**


Aluminium casing or AISI 316 stainless steel casing for high salinity environments

**Customizable light**


Three shades of white and four colours for customizable lighting.

**Minimalist aesthetics**

The design of the square and circle is direct and universal

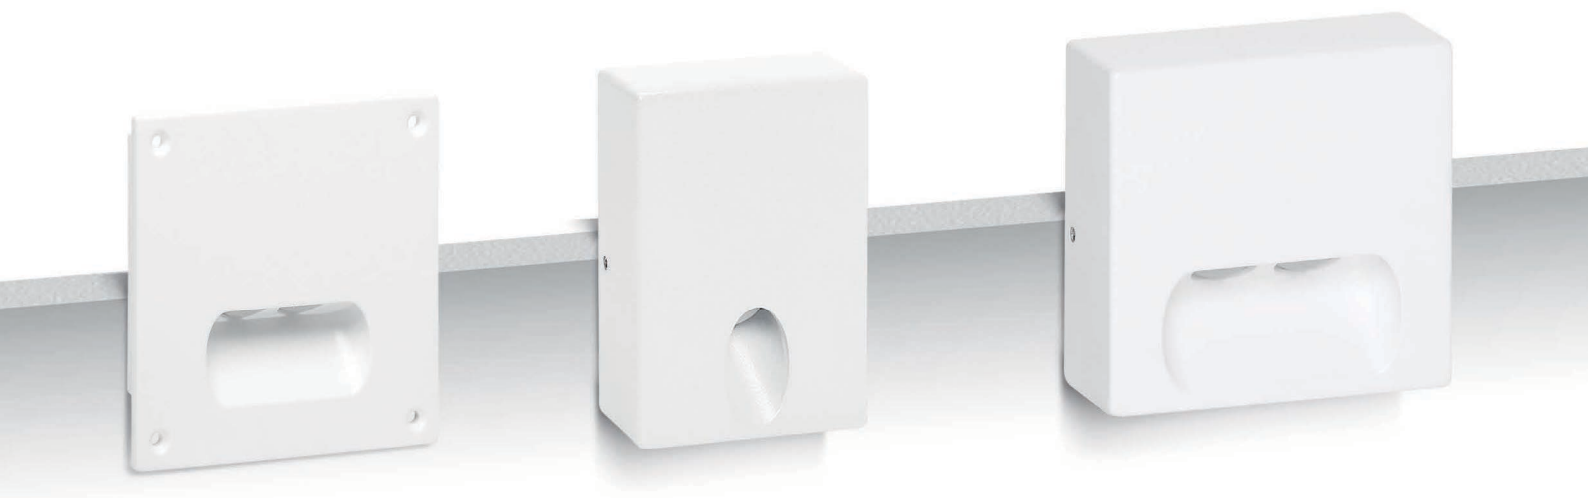


**Quara65\_R** | Path-marker | powerLED 2 W 630 mA



| type                 |                     | colour |        |          | optic |           |
|----------------------|---------------------|--------|--------|----------|-------|-----------|
| White                | CRI 80 <b>85543</b> | 3000 K | 208 lm | <b>W</b> | 70°   | <b>70</b> |
| Grey                 | CRI 80 <b>85542</b> | 4000 K | 222 lm | <b>N</b> |       |           |
| Cor-Ten              | CRI 80 <b>87988</b> | 5000 K | 253 lm | <b>C</b> |       |           |
|                      |                     | Blue   |        | <b>B</b> |       |           |
| R - G - Y on request |                     |        |        |          |       |           |

|                      |                      |                       |              |
|----------------------|----------------------|-----------------------|--------------|
|                      |                      |                       |              |
| <b>89420</b>         | <b>99179</b>         | <b>99186</b>          | <b>84338</b> |
| ON/OFF<br>1 - 2 art. | ON/OFF<br>3 - 6 art. | ON/OFF<br>6 - 12 art. | Outer casing |



**Quara65\_RI** | Path-marker | powerLED 2 W 630 mA



| type                 |                     | colour |        |          | optic |           |
|----------------------|---------------------|--------|--------|----------|-------|-----------|
| Steel                | CRI 80 <b>92671</b> | 3000 K | 208 lm | <b>W</b> | 70°   | <b>70</b> |
|                      |                     | 4000 K | 222 lm | <b>N</b> |       |           |
|                      |                     | 5000 K | 253 lm | <b>C</b> |       |           |
|                      |                     | Blue   |        | <b>B</b> |       |           |
| R - G - Y on request |                     |        |        |          |       |           |

|                      |                      |                       |              |
|----------------------|----------------------|-----------------------|--------------|
|                      |                      |                       |              |
| <b>89420</b>         | <b>99179</b>         | <b>99186</b>          | <b>84338</b> |
| ON/OFF<br>1 - 2 art. | ON/OFF<br>3 - 6 art. | ON/OFF<br>6 - 12 art. | Outer casing |



**Quara65\_F** | Path-marker | powerLED 1 W 350 mA



| type                 |                     | colour |        |          | optic |           |
|----------------------|---------------------|--------|--------|----------|-------|-----------|
| White                | CRI 80 <b>86460</b> | 3000 K | 130 lm | <b>W</b> | 70°   | <b>70</b> |
|                      |                     | 4000 K | 138 lm | <b>N</b> |       |           |
|                      |                     | 5000 K | 158 lm | <b>C</b> |       |           |
|                      |                     | Blue   |        | <b>B</b> |       |           |
| R - G - Y on request |                     |        |        |          |       |           |

|                      |                      |                       |              |
|----------------------|----------------------|-----------------------|--------------|
|                      |                      |                       |              |
| <b>89419</b>         | <b>89421</b>         | <b>99183</b>          | <b>84338</b> |
| ON/OFF<br>1 - 2 art. | ON/OFF<br>3 - 6 art. | ON/OFF<br>6 - 12 art. | Outer casing |

**Quara65\_Q** | Path-marker | powerLED 2 W 630 mA



| type                 |                     | colour |        |          | optic |           |
|----------------------|---------------------|--------|--------|----------|-------|-----------|
| White                | CRI 80 <b>86563</b> | 3000 K | 208 lm | <b>W</b> | 70°   | <b>70</b> |
| Grey                 | CRI 80 <b>86562</b> | 4000 K | 222 lm | <b>N</b> |       |           |
| Cor-Ten              | CRI 80 <b>87989</b> | 5000 K | 253 lm | <b>C</b> |       |           |
|                      |                     | Blue   |        | <b>B</b> |       |           |
| R - G - Y on request |                     |        |        |          |       |           |

|                      |                      |                       |              |
|----------------------|----------------------|-----------------------|--------------|
|                      |                      |                       |              |
| <b>89420</b>         | <b>99179</b>         | <b>99186</b>          | <b>84338</b> |
| ON/OFF<br>1 - 2 art. | ON/OFF<br>3 - 6 art. | ON/OFF<br>6 - 12 art. | Outer casing |

## Quara65\_QI | Path-marker | powerLED 2 W 630 mA



52

## type

Steel CRI 80 **92672**

## colour

|        |        |          |
|--------|--------|----------|
| 3000 K | 208 lm | <b>W</b> |
| 4000 K | 222 lm | <b>N</b> |
| 5000 K | 253 lm | <b>C</b> |
| Blue   |        | <b>B</b> |


R - G - Y on request

## optic

70° **70****89420**ON/OFF  
1 - 2 art.**99179**ON/OFF  
3 - 6 art.**99186**ON/OFF  
6 - 12 art.**84338**

Outer casing

## Quara65\_QI | Path-marker | 190-250 V | powerLED 4 W 630 mA



## type

White CRI 80 **92238**Grey CRI 80 **92239**Cor-Ten CRI 80 **92240**

## colour

|        |        |          |
|--------|--------|----------|
| 3000 K | 416 lm | <b>W</b> |
| 4000 K | 444 lm | <b>N</b> |
| 5000 K | 506 lm | <b>C</b> |
| Blue   |        | <b>B</b> |


R - G - Y on request

## optic

70° **70****98050**

Outer casing

## Quara65\_X | Path-marker | 190-250 V | powerLED 2 W 630 mA



## type

White CRI 80 **92214**Grey CRI 80 **92215**Cor-Ten CRI 80 **92216**

## colour


|        |        |          |
|--------|--------|----------|
| 3000 K | 208 lm | <b>W</b> |
| 4000 K | 222 lm | <b>N</b> |
| 5000 K | 253 lm | <b>C</b> |
| Blue   |        | <b>B</b> |

R - G - Y on request

## optic

70° **70**

## Quara65\_X | Path-marker | 190-250 V | powerLED 4 W 630 mA



## type

White CRI 80 **92218**Grey CRI 80 **92219**Cor-Ten CRI 80 **92220**

## colour

|        |        |          |
|--------|--------|----------|
| 3000 K | 416 lm | <b>W</b> |
| 4000 K | 444 lm | <b>N</b> |
| 5000 K | 506 lm | <b>C</b> |
| Blue   |        | <b>B</b> |

R - G - Y on request

## optic

70° **70**