


WIN+1



● GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminum housing chemically pre-treated and painted with polyester powder coating
- Flat tempered glass diffuser
- High-transparency polycarbonate lenses for best light transmission
- Available with symmetrical, asymmetrical, and road emission lenses
- Anti-ageing silicone gasket
- Fully integrated technopolymer trim hinged to the housing
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Light beam obtained by the combination of multiple LED modules
- Stainless steel external screws
- Powder coated steel bracket
- On request, versions with dimmable ballast available
- 3000 K and 5700 K available upon request



WIN+1
S/M
73W



WIN+1
S/M
38W



WIN+1
A/W
73W



WIN+1
A/W
38W



WIN+1
WR
73W




WIN+1
WR
38W

WIN+1 S/M

IK07 2.4J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	73 W	I	70	4000	•	S/M	-	8900 lm	7862 lm	70	10	55000 h	●	06265494
LED	38 W	I	70	4000	•	S/M	-	4450 lm	3943 lm	70	10	55000 h	●	06265594



WIN+1 A/W

IK07 2.4J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	73 W	I	70	4000	•	A55/W	-	8900 lm	7081 lm	70	10	55000 h	●	06265294
LED	38 W	I	70	4000	•	A55/W	-	4450 lm	3672 lm	70	10	55000 h	●	06265394

WIN+1 WR



IK07 2.4J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	73 W	I	70	4000	•	SR/T1	-	8900 lm	7545 lm	70	10	55000 h	●	06265694
LED	38 W	I	70	4000	•	SR/T1	-	4450 lm	3916 lm	70	10	55000 h	●	06265794


OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
WIN+1		
External steel cowl painted aluminium grey (WIN+1)	●	14043194
External anti-glare louvre painted aluminium grey (WIN+1).	●	14043294
Single WIN+1 pole top fitting and outreach arm for Ø 60-76 mm poles. Aluminium pole top and steel outreach arm, painted aluminium grey.	●	14048894
Twin WIN+1 aluminium pole top fitting and steel outreach arm for Ø 60-76 mm poles, installed at 180°. Finished painted aluminium grey.	●	14048994
Twin WIN+1 aluminium pole top fitting and steel outreach arm for Ø 60-76 mm poles, installed at 90°. Finished painted aluminium grey.	●	14049094
Three WIN+1 aluminium pole top fitting and steel outreach arm for Ø 60-76 mm poles, installed at 90°. Finished painted aluminium grey.	●	14049194
Three WIN+1 aluminium pole top fitting and steel outreach arm for Ø 60-76 mm poles, installed at 120°. Finished painted aluminium grey.	●	14050294

DESCRIPTION	COLOR	PART NUMBER
Four WIN+1 aluminium pole top fitting and steel outreach arm for Ø 60-76 mm poles, installed at 90°. Finished painted aluminium grey.	●	14049294
500 mm wall mounting extension arm in sheet steel painted aluminium grey (WIN+1).	●	14043394
WIN+1 mounting bracket in stainless steel.	●	14048104
Gliding support made of painted aluminium for the installation on 60 - 76 mm diam. posts . 1 luminaire 5STARS 1 / WIN+1.	●	14029094
Gliding support made of painted aluminium for the installation on 60-76 mm diam. posts 2 opposed luminaires 5STARS 1 / WIN+1.	●	14047194

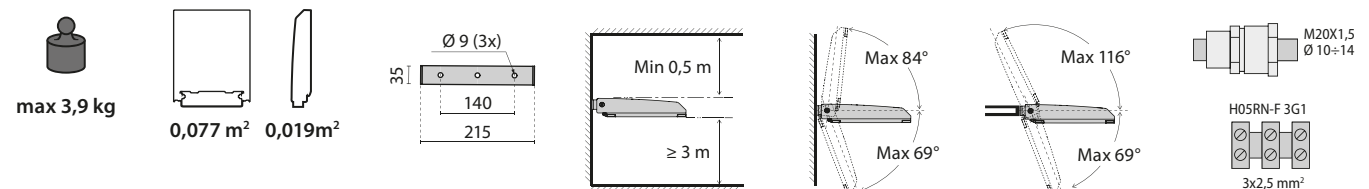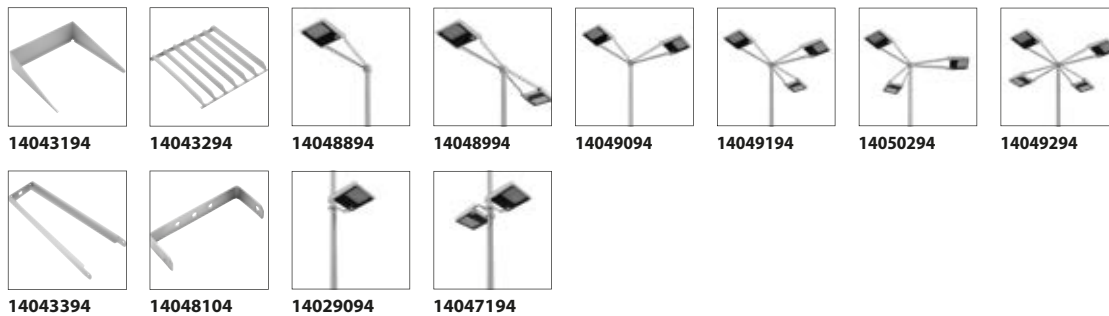


WIN+2



● GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminum housing chemically pre-treated and painted with polyester powder coating
- Flat tempered glass diffuser
- High-transparency polycarbonate lenses for best light transmission
- Available with symmetrical, asymmetrical, and road emission lenses
- Anti-ageing silicone gasket
- Fully integrated technopolymer trim hinged to the housing
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Light beam obtained by the combination of multiple LED modules
- Stainless steel external screws
- Powder coated steel bracket
- On request, versions with dimmable ballast available
- 3000 K and 5700 K available upon request
- For the 210 W versions, "uplight" installation is permitted outdoors only.

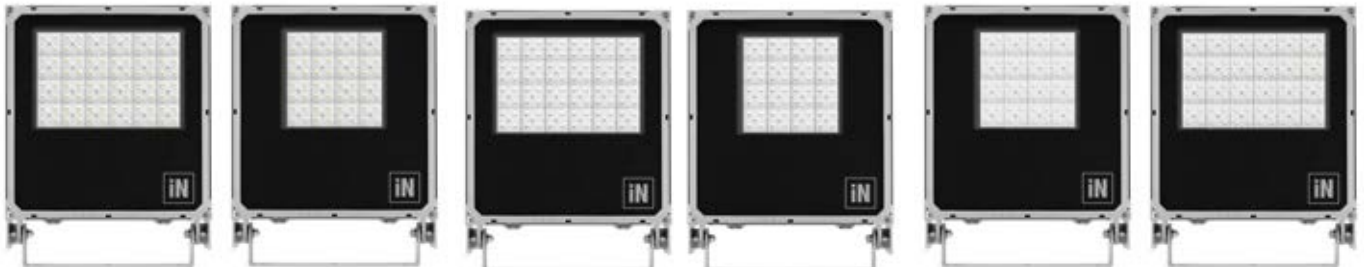

WIN+2
S/M
210 W

WIN+2
S/M
139 W

WIN+2
A/W
210 W

WIN+2
A/W
139 W


WIN+2
WR
139 W

WIN+2
WR
210 W

WIN+2 S/M

IK07 2.4J xx5

LAMPHOLDER	WATTAGE	CLASS	☞	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	210 W	I		70	4000	•	S/M	-	26700 lm	24131 lm	70	10	55000 h	●	06266094
LED	139 W	I		70	4000	•	S/M	-	17800 lm	16172 lm	70	10	55000 h	●	06266194

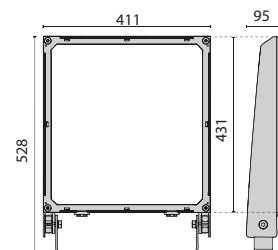

WIN+2 A/W

IK07 2.4J xx5

LAMPHOLDER	WATTAGE	CLASS	☞	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	210 W	I		70	4000	•	A55/W	-	26700 lm	22099 lm	70	10	55000 h	●	06265894
LED	139 W	I		70	4000	•	A55/W	-	17800 lm	15013 lm	70	10	55000 h	●	06265994

WIN+2 WR


IK07 2.4J xx5

LAMPHOLDER	WATTAGE	CLASS	☞	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	210 W	I		70	4000	•	SR/T2	-	26700 lm	22999 lm	70	10	55000 h	●	06266294
LED	139 W	I		70	4000	•	SR/T2	-	17800 lm	15483 lm	70	10	55000 h	●	06266394

OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
WIN+2		
External anti-glare louvre painted aluminium grey (WIN+2).	●	14045694
External steel cowl painted aluminium grey (WIN+2).	●	14045794
Aluminium pole top and steel outreach arm. Painted aluminium grey (WIN+2).	●	14068694
Twin WIN+2 aluminium pole top fitting and steel outreach arm for $\varnothing 76$ mm poles, installed at 90° . Painted aluminium grey.	●	14068794
Twin WIN+2 aluminium pole top fitting and steel outreach arm for $\varnothing 76$ mm poles, installed at 180° . Painted aluminium grey.	●	14068894
Three WIN+2 aluminium pole top fitting and steel outreach arm for $\varnothing 76$ mm poles, installed at 90° . Painted aluminium grey.	●	14068994
Three WIN+2 aluminium pole top fitting and steel outreach arm for $\varnothing 76$ mm poles, installed at 120° . Painted aluminium grey.	●	14069094
Four WIN+2 aluminium pole top fitting and steel outreach arm for $\varnothing 76$ mm poles. Painted aluminium grey.	●	14069194
Long bracket for ceiling mounting, painted aluminium grey (WIN+2).	●	14057394

DESCRIPTION	COLOR	PART NUMBER
WIN+2 strengthening bracket. Suitable for one floodlight single point fixing M12 screw in centre of the bracket.	●	14046120
1000mm extension arm in heavy gauge steel, painted aluminium grey (WIN+2).	●	14048694
Single pole top mounting, for $\varnothing 60-76$ mm poles, painted aluminium grey (WIN+2).	●	14051294
Double pole top mounting, $\varnothing 60-76$ mm poles, painted aluminium grey	●	14051394

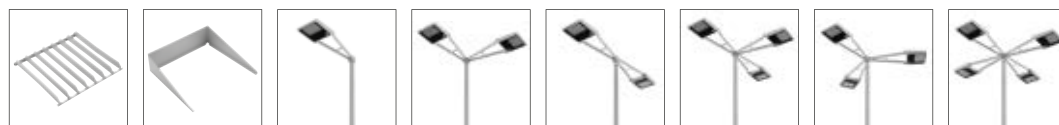

14045694

14045794

14068694


14068794

14068894

14068994

14069094

14069194

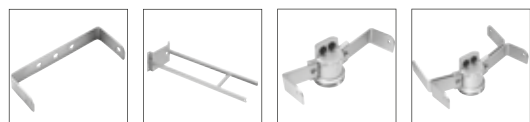

14057394

14048694

14051294

14051394

