


BAMBOO




Pillar design soft illumination bollard fixture. Commercial level quality and performance within a domestic aesthetic.

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear or opal UV-stabilised polycarbonate diffuser
- Integral control gear



Feature

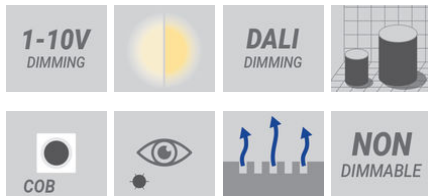


Light symbol



Product colour



Special finishes upon request

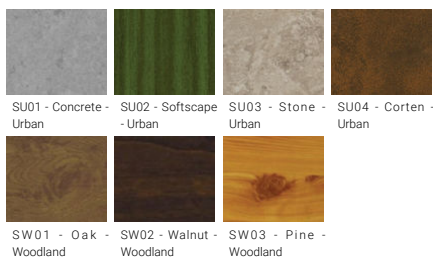

We reserve the right to make technical and design changes.

01:18, 16-05-2022





<https://www.ligman.com/bamboo-bollards-ba-b03/>

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com





ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com

BAMBOO

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
102x102 mm - 1068 mm - Square									
BAMBOO 4	BA-10643	1 COB	15 W	307 - 463 lm	C [121°x 139°], O [360°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	4.1 kg	
102x102 mm - 668 mm - Square									
BAMBOO 4	BA-10633	1 COB	15 W	307 - 463 lm	C [146°x 119°], O [360°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	3.1 kg	
Ø102 - 1065 mm - Round									
BAMBOO 3	BA-10623	1 COB	15 W	355 - 480 lm	C [121°x 139°], O [360°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	3.5 kg	
Ø102 - 665 mm - Round									
BAMBOO 3	BA-10613	1 COB	15 W	355 - 480 lm	C [146°x 119°], O [360°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.5 kg	

Accessories

	 Anchor bolt A10791	 Security core (Anti-traffic) A13091	 Security core (Anti-traffic) A13191	 DALI Control System Control-DALI
BA-10613	•	•		•
BA-10623	•		•	•
BA-10633	•	•		•
BA-10643	•		•	•

We reserve the right to make technical and design changes.

01:18, 16-05-2022

<https://www.ligman.com/bamboo-bollards-ba-b03/>



Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com



BAMBOO

BAMBOO

BAMBOO 3

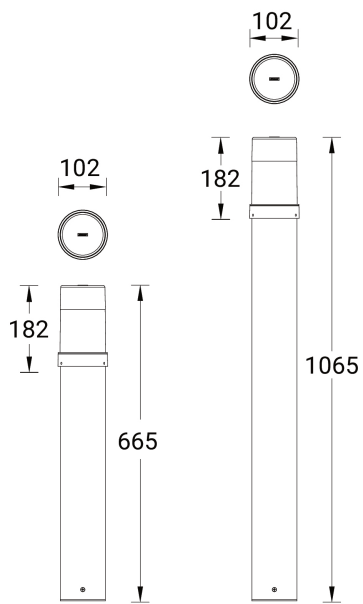

BAMBOO 4

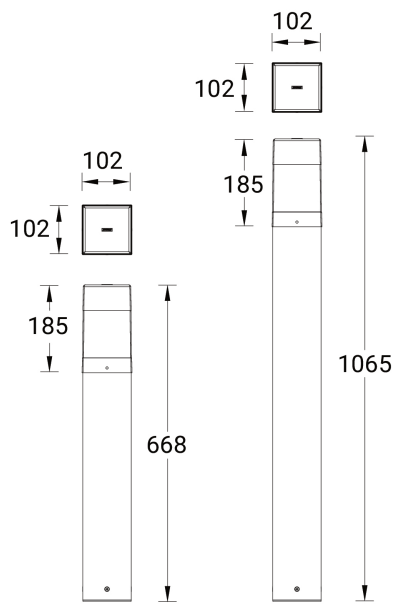

BAMBOO



BAMBOO

Surface facade luminaires

Pillar design soft illumination wall fixture.
Commercial level quality and performance
within a domestic aesthetic.

<https://www.ligman.com/bamboo-surface-facade-luminaires-ba-su3/>