


RADO

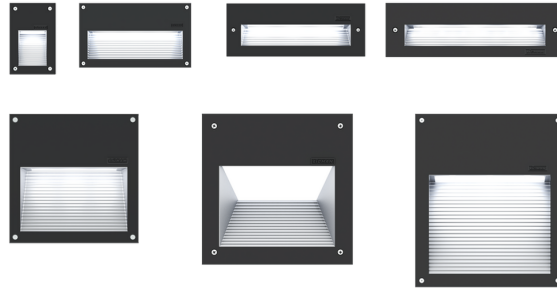


Sturdy classic wall-recessed pathway and stair luminaire. Simple pleasing aesthetic and sturdy construction, perfect for retrofit applications with its multiple sizes offered.


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

Feature

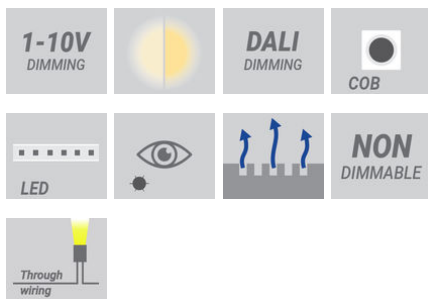


Light symbol

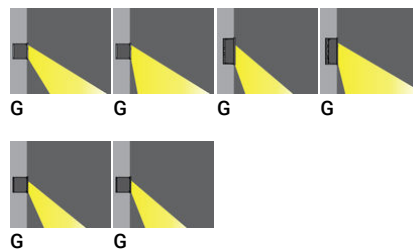

Product colour



Special finishes upon request

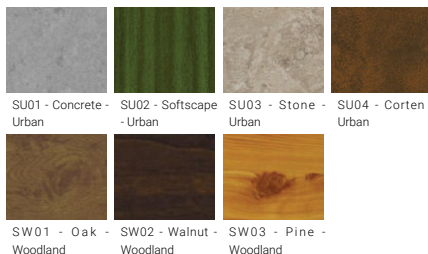

We reserve the right to make technical and design changes.

01:13, 16-05-2022





<https://www.ligman.com/rado-recessed-luminaires-ra-re3/>

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com


ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com

RADO

Technical information

| | Model number | Light source | Power | Lumen | Optic | CCT / CRI | Dimming type | Weight |
|---------------------------|-----------------|--------------|-------|----------------|-------------|--------------------------|---------------------|--|
| With locking clamp | | | | | | | | |
| RADO 7 | RA-40711 | 1 COB | 20 W | 1382 - 1399 lm | G [42°x69°] | 3000K CRI80, 4000K CRI80 | DALI, 1-10V, On/Off | 4.6 kg. |
| RADO 7 | RA-40712 | 1 COB | 38 W | 2082 - 2192 lm | G [48°x75°] | 3000K CRI80, 4000K CRI80 | On/Off | 4.6 kg |
| With recessing box | | | | | | | | |
| RADO 1 | RA-40531 | 1 COB | 4 W | 124 - 133 lm | G [36°x50°] | 3000K CRI80, 4000K CRI80 | 1-10V, On/Off | 1.0 kg |
| RADO 2 | RA-40542 | 4 x 12 LED | 17 W | 558 - 620 lm | G [23°x94°] | 3000K CRI80, 4000K CRI80 | DALI, 1-10V, On/Off | 1.2 kg  |
| RADO 3 | RA-40552 | 3 x 12 LED | 13 W | 502 - 540 lm | G [50°x80°] | 3000K CRI80, 4000K CRI80 | DALI, 1-10V, On/Off | 2.0 kg  |
| RADO 4 | RA-40562 | 4 x 12 LED | 27 W | 768 - 853 lm | G [50°x75°] | 3000K CRI80, 4000K CRI80 | DALI, 1-10V, On/Off | 4.0 kg  |
| RADO 5 | RA-40582 | 4 x 12 LED | 17 W | 402 - 447 lm | G [32°x88°] | 3000K CRI80, 4000K CRI80 | DALI, 1-10V, On/Off | 1.4 kg  |
| RADO 6 | RA-40692 | 30 LED | 11 W | 438 - 471 lm | G [31°x88°] | 3000K CRI80, 4000K CRI80 | On/Off | 2.5 kg |
| RADO 7 | RA-40701 | 1 COB | 20 W | 1382 - 1399 lm | G [42°x69°] | 3000K CRI80, 4000K CRI80 | DALI, 1-10V, On/Off | 6.5 kg |
| RADO 7 | RA-40702 | 1 COB | 38 W | 2082 - 2192 lm | G [48°x75°] | 3000K CRI80, 4000K CRI80 | On/Off | 6.5 kg |

Accessories

| |  DALI Control System Control-DALI |
|----------|---|
| RA-40531 | |
| RA-40542 | • |
| RA-40552 | • |
| RA-40562 | • |
| RA-40582 | • |
| RA-40692 | • |
| RA-40701 | • |
| RA-40702 | |
| RA-40711 | • |
| RA-40712 | |

We reserve the right to make technical and design changes.

01:13, 16-05-2022

<https://www.ligman.com/rado-recessed-luminaires-ra-re3/>


Europe
 LIGMAN EUROPE s.r.o.
 VGP Park Ústí nad Labem
 P 2 120
 40317, Přestanov
 Czech Republic
 +420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
 LIGMAN Lighting Co.,Ltd.
 17/2 Moo4 Monthong
 Bangnampreaw
 24150, Chachoengsao
 Thailand
 +66 2 108 6700
info@ligman.com

RADO



RADO

RADO 1





Recessing box

RADO 2





Recessing box

RADO 3





Recessing box

RADO 4





Recessing box

RADO 5




Recessing box

RADO 6




Recessing box

RADO 7




RA-40701-02



Recessing box

RADO 7 Locking clamp

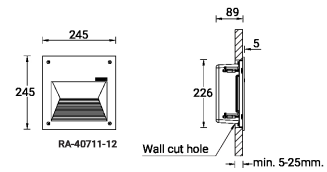

RA-40711-12

RADO 7 (RA-40711-12)
Wall cut hole 226x226mm.

RADO



RADO
Bollards

Sturdy classic bollard pathway and stair luminaire. Simple pleasing aesthetic and sturdy construction, perfect for delineating perimeter applications.

<https://www.ligman.com/rado-bollards-ra-bo3/>