

UTAH



Miniature adjustable projector range. Contemporary simplicity and a diminutive footprint allows designers to paint landscaping with light whilst avoiding visual clutter.

Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 0.7 m of 3x1.0 sqmm outdoor cable for UT-50571, UT-50572, UT-50573
- One cable gland supplied with 0.5 m of 3x1.0 sqmm outdoor cable for UT-50552, UT-50553, UT-50562, UT-50563
- One cable gland supplied with 0.5 m of 5x0.75 sqmm outdoor cable for UT-50555, UT-50565
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver is not included for UTAH 1, UTAH 2, UTAH 3, UTAH 4
- Integral control gear for UTAH ECO 1
- Remote box IP-rated is not included
- Plastic ground spike for garden type



Feature




Light symbol



Product colour



Special finishes upon request

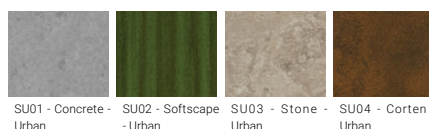

We reserve the right to make technical and design changes.

01:22, 18-05-2022

<https://www.ligman.com/utah-floodlights-projectors-ut-pr3/>

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com

UTAH

SW01 - Oak - Woodland - SW02 - Walnut - Woodland - SW03 - Pine - Woodland

We reserve the right to make technical and design changes.

01:22, 18-05-2022







<https://www.ligman.com/utah-floodlights-projectors-ut-pr3/>

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com








ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com

UTAH








Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
With driver / spike / anti-glare visor - 230 V 50/60 Hz - Class I								
UTAH ECO 1	UT-50571	1 LED	6 W	356 - 374 lm	M [24°]	3000K CRI80, 4000K CRI80	On/Off	0.27 kg.
UTAH ECO 1	UT-50572	1 LED	8 W	462 - 486 lm	M [23°]	3000K CRI80, 4000K CRI80	On/Off	0.27 kg.
Without remote box IP-rated - Without remote driver - Constant voltage (CV) 24V - Class III - RGBW								
UTAH 3	UT-50555	1 LED	5 W	1m	M [33°]	RGBW30, RGBW40	DMX/RDM	0.27 kg. 
Without remote box IP-rated - Without remote driver - Constant current (CC) 500 mA - Class III								
UTAH 1	UT-50553	1 LED	3 W	319 - 336 lm	N [24°]	3000K CRI80, 4000K CRI80	On/Off	0.27 kg. 
Without remote box IP-rated - Without remote driver - Constant voltage (CV) 24V - Class III								
UTAH 1	UT-50552	1 LED	3 W	319 - 336 lm	N [24°]	3000K CRI80, 4000K CRI80	On/Off	0.27 kg. 
Without remote box IP-rated - Without remote driver - With spike - Constant current (CC) 500 mA - Class III								
UTAH 2	UT-50563	1 LED	3 W	160 - 336 lm	N [23°]	3000K CRI80, 4000K CRI80	On/Off, DALI, 1-10V	0.27 kg. 
Without remote box IP-rated - Without remote driver - With spike - Constant voltage (CV) 24 V - Class III								
UTAH 2	UT-50562	1 LED	3 W	160 - 336 lm	N [23°]	3000K CRI80, 4000K CRI80	On/Off	0.27 kg. 
Without remote box IP-rated - Without remote driver - With spike - Constant voltage (CV) 24 V - Class III - RGBW								
UTAH 4	UT-50565	1 LED	5 W	224 lm	M [33°]	RGBW30, RGBW40	DMX/RDM	0.27 kg. 

Accessories


	 Driver ND - 25 W - IP20 - Constant voltage - 24V A32091-ND	 Driver ND - 50 W - IP20 - Constant voltage - 24V A32191-ND	 Driver ND - 100 W - IP20 - Constant voltage - 24V A32291-ND	 Driver ND - 150 W - IP20 - Constant voltage - 24V A32391-ND	 Driver ND - 200 W - IP20 - Constant voltage - 24V A32491-ND	 Driver ND - 350 W - IP20 - Constant voltage - 24V A32591-ND	 Driver DA - 20 W - IP20 - Constant current - 700 mA max A32691-DA
UT-50552	•	•	•	•	•	•	
UT-50553							•
UT-50555	•	•	•	•	•	•	
UT-50562	•	•	•	•	•	•	
UT-50563							•
UT-50565	•	•	•	•	•	•	
UT-50571							
UT-50572							

UTAH


	 Driver DI - 20 W - IP20 - Constant current - 700 mA max A32691-DI	 Driver ND - 20 W - IP20 - Constant current - 700 mA max A32691-ND	 Anti-glare visor A51431	 Remote box IP65 A80191	 DALI Control System Control-DALI	 DMX Control System Control-DMX	 DMX/RDM Control System Control-DMX-RDM
UT-50552			•	•	•		
UT-50553	•	•	•	•	•		
UT-50555			•	•		•	•
UT-50562			•	•			
UT-50563	•	•	•	•	•		
UT-50565			•	•		•	•
UT-50571							
UT-50572							

UTAH

UTAH 1,3

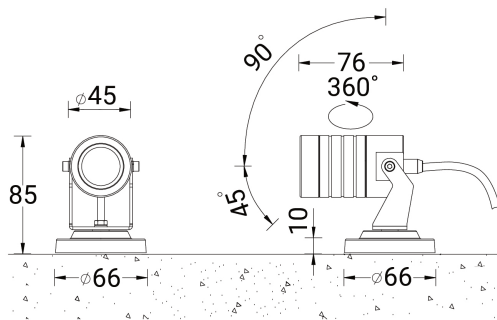

UTAH 2,4

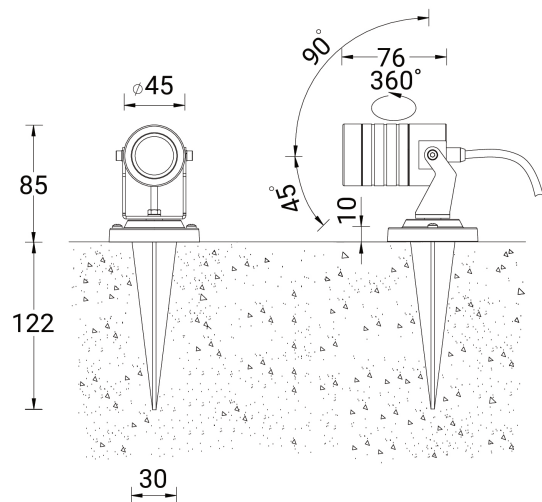

We reserve the right to make technical and design changes.

01:22, 18-05-2022

<https://www.ligman.com/utah-floodlights-projectors-ut-pr3/>

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com