

ZEAT



Petite adjustable projector family. Rugged looks and available in three sizes for flexible and affordable landscape lighting.




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear for ZE-50391, ZE-50392
- Remote driver is included for ZE-50019, ZE-50020, ZE-50029, ZE-50030
- Remote box IP-rated

Feature




Light symbol

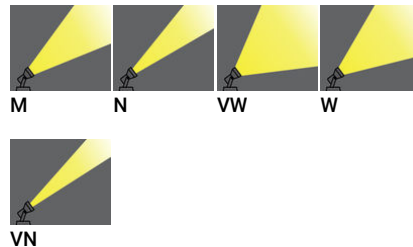

Product colour



Special finishes upon request

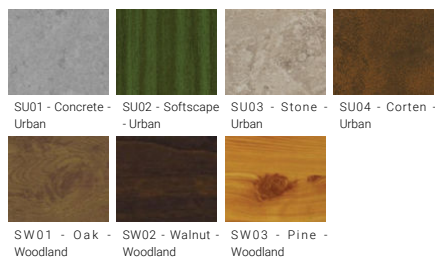

We reserve the right to make technical and design changes.

01:22, 18-05-2022

<https://www.ligman.com/zeat-floodlights-projectors-ze-pr3/>

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com





ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com

ZEAT

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
With driver - 230 V 50/60 Hz - Class I								
	ZEAT 3 ZE-50391	1 COB	15 W	798 - 1074 lm	M [32°], N [26°], VW [60°], W [46°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	1.5 kg
	ZEAT 3 ZE-50392	1 LED	11 W	644 - 758 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	1.5 kg
Without remote box IP-rated - With remote driver - Constant current (CC) 350 mA - Class III								
	ZEAT 1 ZE-50019	1 COB	15 W	798 - 1083 lm	M [32°], N [26°], VW [60°], W [46°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	1.0 kg
Without remote box IP-rated - With remote driver - Constant current (CC) 700 mA - Class III								
	ZEAT 1 ZE-50020	1 LED	11 W	644 - 758 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	1.0 kg
Without remote box IP-rated - With remote driver / spike - Constant current (CC) 350 mA - Class III								
	ZEAT 2 ZE-50029	1 COB	15 W	798 - 1074 lm	M [32°], N [26°], VW [60°], W [46°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	1.2 kg
Without remote box IP-rated - With remote driver / spike - Constant current (CC) 700 mA - Class III								
	ZEAT 2 ZE-50030	1 LED	11 W	644 - 758 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	1.2 kg



Accessories

	 Ground spike A50141	 Mounting belt A50291	 Remote box IP65 A80191	 DALI Control System Control-DALI
ZE-50019		•	•	•
ZE-50020		•	•	•
ZE-50029			•	•
ZE-50030			•	•
ZE-50391	•	•		•
ZE-50392	•	•		•

ZEAT



ZEAT

ZEAT 1

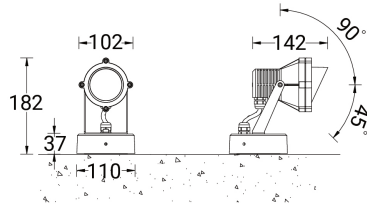



Mounting Detail

ZEAT 2

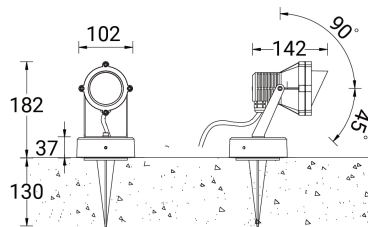

Mounting Detail

ZEAT 3

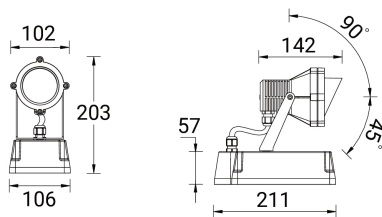

Mounting Detail