

FARO 60

Specification Sheet



Ordering Information

Model	Power	Color Temp.	Optics	Finish	Options	Accessories
FR60	L	27 30 40	SP FL GR	W AT B	SK ST	FRSNW FRSNAT FRSNB



Application

- Architectural and landscape lighting
- Surface mount (floor/wall) installation
- Spike mount for landscape
- Tree strap
- Rotatable spotlight with different optics
- UL STD 1598, IP66, Wet location
- Glare reduction accessory - snoot

Luminaire

- Sustainable design, replaceable LED module
- 2 axis adjustability (180°/95°)
- Base for feed through connection
- Clear tempered glass 4mm (1,8")
- Recessed lens for glare reduction
- High performance optics
- Anodized and painted body
- Aluminium construction
- Finish powder coat RAL9003/RAL7016 RAL9005 structure
- Base/Spike/Tree Strap installation
- Supplied with IP66 mini connector
- Remote power supply
- IK08

Power - Delivered lumens

- L - 8W, 2700K - 4000K, 720lm

Color Temperature

- 27 - 2700K
- 30 - 3000K
- 40 - 4000K
- 2 Step MacAdam
- CRI: > 85

Optics

- SP - Spot - 10°
- FL - Flood - 30°
- GR - Graze - 49° x 34°

Constant Voltage

- 24 - 24VDC fixture voltage

Finish

- W - RAL 9003 Structure (white)
- AT - RAL 7016 Structure (grey anthracite)
- B - RAL 9005 Structure (black)

Options

- SK - Spike
- ST - Tree Strap


Accessories

- FRSNW - Snoot RAL9003
- FRSNAT - Snoot RAL7016
- FRSNB - Snoot RAL9005

POWER SUPPLIES

List of proposed power supplies that are to be ordered separately.
Please click [link](#) for list of available drivers.

Click [here](#) for voltage drop and distances.

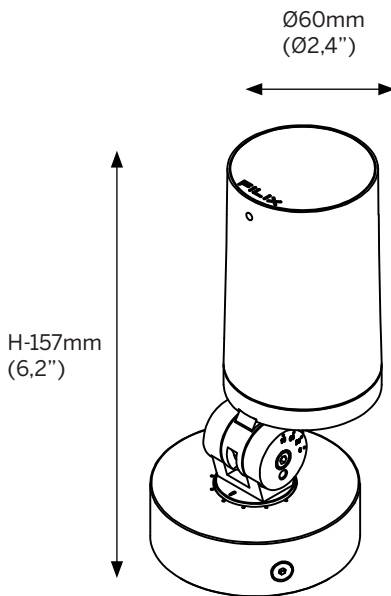

International: +385 52 255 324 filixlighting.com
info@filixlighting.com

Europe/GmbH: info@filixlighting.com

Europe MENA: info@filixlighting.com

North America: filixlighting-usa.com info@filixlighting.com

Filix reserves the right to make technical changes without notice.

FARO 60

Dimensions




Note:

For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.


Dimensions

Installation details

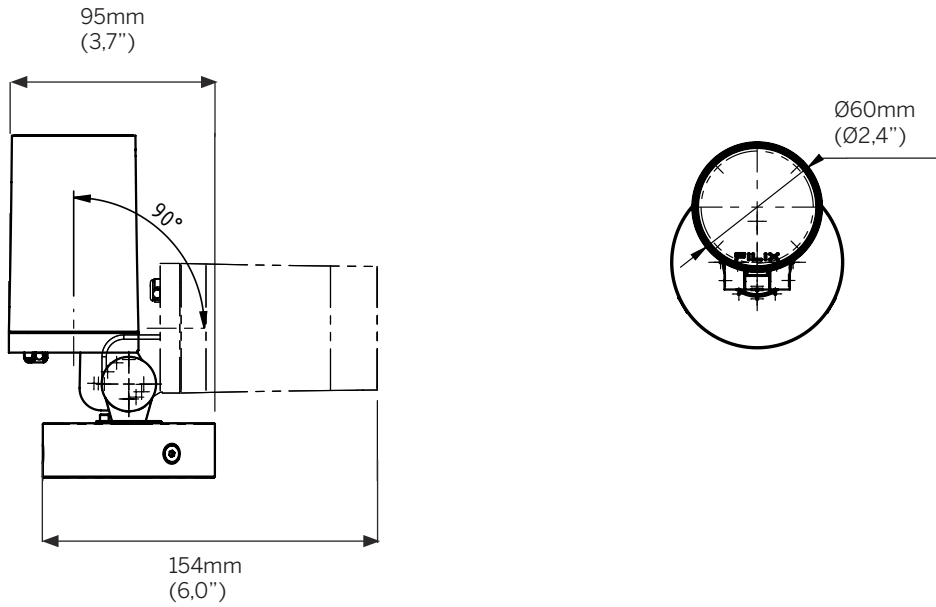


Installation options

Spike (SK)

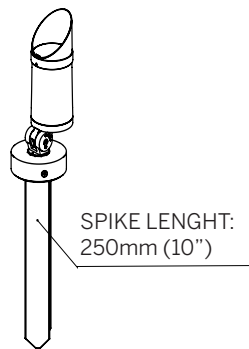

Tree strap (ST)

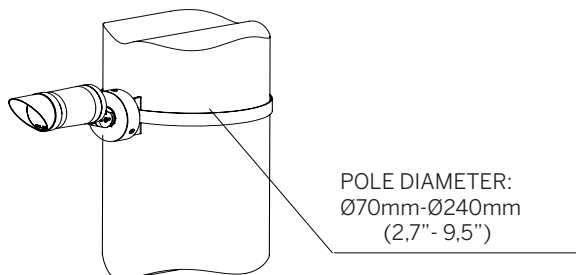

International: +385 52 255 324 filixlighting.com
info@filixlighting.com
Europe/GmbH: info@filixlighting.com
Europe MENA: info@filixlighting.com
North America: filixlighting-usa.com info@filixlighting.com

Filix reserves the right to make technical changes without notice.