


SPILLO

design by ALESSANDRO PEDRETTI



● AN-96 / Anthracite gray / Textured

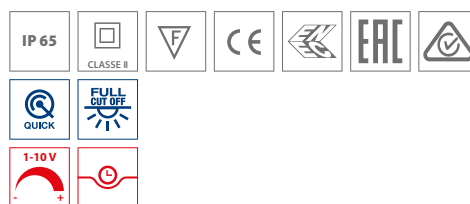

Series of LED landscaping outdoor bollard and pole-top luminaires, comprising:

- Painted die-cast aluminium housing
- Anti-ageing silicone gasket
- External electrical connection with sealed plug-socket QUICK, complete with cable
- Waterproof cable gland M25x1.5 for cables Ø 9- Ø 14 mm
- Stainless steel external screws
- Analogue dimmable HF ballast, 1-10 V
- Each LED is coupled with an electronic safety device (NUD) that can by-pass it in case of failure
- The "SECURE LIGHT DISTRIBUTION" system guarantees uniform light distribution even in the remote case of LED failures
- Supplied with 1m pre-wired HORN-5 cable
- CP versions feature asymmetric light distribution suitable for bicycle and pedestrian pathways
- Supplied complete with 220-240 V 50/60 Hz power supply unit.
- Complying with the recommendations for glare control and upward light pollution



The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system. It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



It is possible to replace the LED cards to keep the luminaire technologically updated through the years.


SPILLO MINI POST

IK10 20J xx9

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
------------	---------	-------	-----	--------	-------------	-------	------------	--------------------------	------------------------	---	---	----------	-------------	-------------

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

LED	16 W	II	•	70	4000	C/EW	-	1683 lm	1034 lm	80	10	60000 h	●	303496
LED	11 W	II	•	70	4000	C/EW	-	1122 lm	703 lm	80	10	60000 h	●	303494

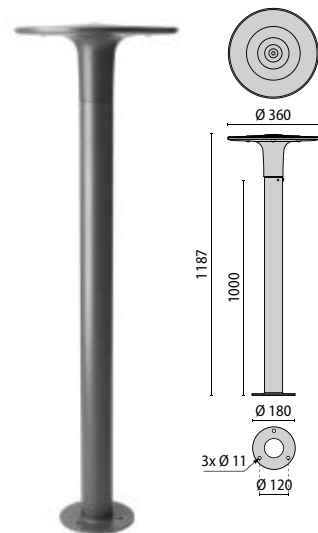

SPILLO MINI

IK10 20J xx9

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
------------	---------	-------	-----	--------	-------------	-------	------------	--------------------------	------------------------	---	---	----------	-------------	-------------

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

LED	16 W	II	•	70	4000	C/EW	-	1683 lm	1034 lm	80	10	60000 h	●	303497
LED	11 W	II	•	70	4000	C/EW	-	1122 lm	703 lm	80	10	60000 h	●	303528



SPILLO

IK10 20J xx9


LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
------------	---------	-------	-----	--------	-------------	-------	------------	--------------------------	------------------------	---	---	----------	-------------	-------------

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

LED	44 W	II	•	70	4000	C/EW	-	5236 lm	3301 lm	80	10	60000 h	●	303501
LED	44 W	II	•	70	4000	CP	-	5236 lm	3403 lm	80	10	60000 h	●	303814
LED	24 W	II	•	70	4000	C/EW	-	2618 lm	1674 lm	80	10	60000 h	●	303499


Power LED - with automatic power reduction 220-240 V 50/60 Hz

LED	44 W	II		70	4000	C/EW	-	5236 lm	3301 lm	80	10	60000 h	●	304024
-----	------	----	--	----	------	------	---	---------	---------	----	----	---------	---	---------------

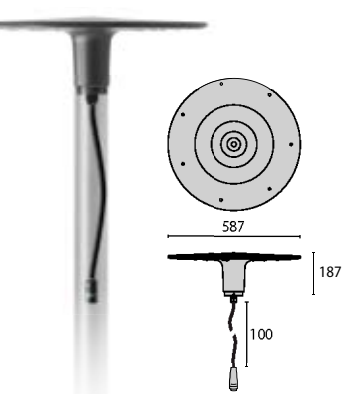




SPILLO MINI POST


max 5,5 kg






SPILLO MINI

 
max 3,3 kg 0,0047 m²




SPILLO

 
max 7 kg 0,0062 m²



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
SPILLO MINI		
Pole top adaptor Ø 48 mm	●	310404
Pole top adaptor Ø 60 mm	●	310416
Baseplate Spillo Mini		310414
SPILLO		
Pole top adaptor Ø 60 mm	●	310403
Pole top adaptor Ø 76 mm	●	310405
Pole Spillo INT. 3.3 m	●	315023
Pole Spillo FT. 2.8 m with flange	●	315024
Baseplate Spillo		310415

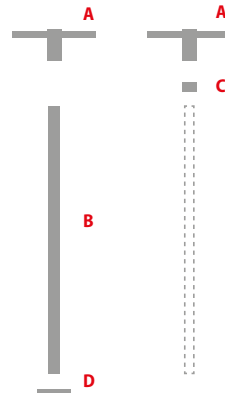

Complete unit

1A+1B + 1C = please order 3 codes
 1A+1C = please order 2 codes

COMPONENTS	
A	luminaire
B	pole
C	adaptor
D	c/flange






SPILLO MINI



SPILLO MINI POST



SPILLO

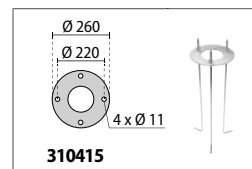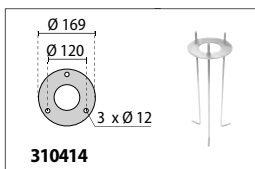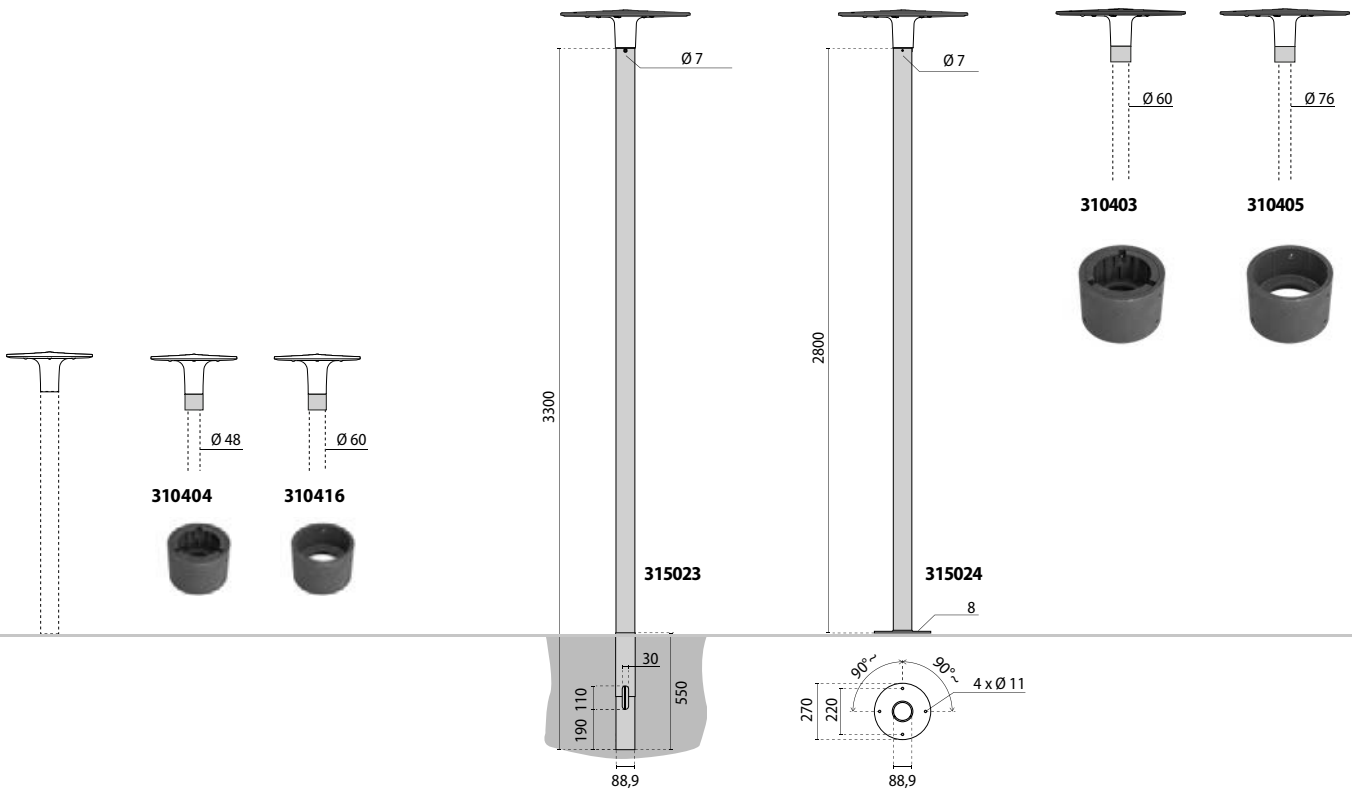



PARCO QUARTIERE NAVILE | Bologna | ITALY